

VECO VANSONIC ENTERPRISE CO., LTD.

8F., No.7, Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335


FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET

1.	MODEL:	28CS08FN-2 -M50ND(Black Mylar) -M50NT(Clear Mylar)					
2.	Dimension	Outer Diameter	28	mm.	Baffle Opening	25.1	mm.
		Height	Refer to Drawing.		Weight	4.8	Grams.
3.	Magnet	Materials	Rare Earth		Size	Ø 12.5X1.5 mm.	
4.	Nominal Impedance	8		±	15 %	At	1500 Hz.
5.	Power Rating	Normal	500	mW.	Maximum	1000	mW.
6.	Lowest Resonant Frequency	680		±	20 %	Hz.	
7.	Output Sound Pressure Level (S.P.L.)	85 ± 3 db / 0.5 Watt . 0.5 Meter.					
		Average at	800,	1000,	1200,	1500	Hz.
8.	Frequency Range	400 ~ 7000		Hz.	Average SPL - 10 db.		
9.	Distortion	5 %	Maximum At		1000 Hz.	500 mW.	
10.	Abnormal Sound Test	Must be Normal Tested By			2.0 Volts.	Sine Wave.	
11.	Load Test	White Noise with Weighted Filter			2.0 Volts.(RMS)	24Hrs.	
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the "+" or "Marked" Terminal.					

MOUNTING NOTICE

AT LEAST
0.8
FOR
DIAPHRAGM
MOVING

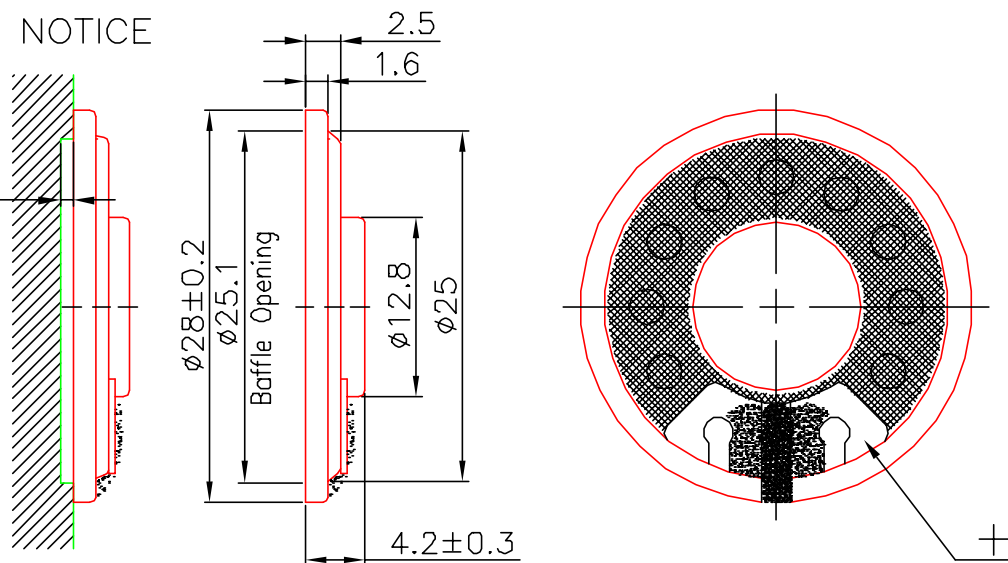

Unit : mm

Housing Material : METAL