

VECO VANSONIC ENTERPRISE CO., LTD.

8F., No.7, Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335




FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET

1.	MODEL:	28CS08G -M75NT(Clear Mylar)-M75ND(Black Mylar)					
2.	Dimension	Outer Diameter	28	mm.	Baffle Opening	26.4	mm.
		Height	Refer to Drawing.		Weight	2.9	Grams.
3.	Magnet	Materials	Rare Earth		Size	ϕ 9.5X1.5	mm.
4.	Nominal Impedance	8		\pm 15 %	At	1200 Hz.	
5.	Power Rating	Normal	200	mW.	Maximum	300 mW.	
6.	Lowest Resonant Frequency	850		\pm 20 %	Hz.		
7.	Output Sound Pressure Lever (S.P.L.)	82 \pm 3 db / 0.2 Watt . 0.5 Meter.					
		Average at	800,	1000,	1200,	1500 Hz.	
8.	Frequency Range	600 ~ 5600		Hz.	Average SPL - 10 db.		
9.	Distortion	5 %		Maximum At	1000 Hz.		200 mW.
10.	Abnormal Sound Test	Must be Normal Tested By			1.3	Volts.	Sine Wave.
11.	Load Test	White Noise with Weighted Filter			1.3 Volts.(RMS)		24Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the "+" or "Marked" Terminal.					

MOUNTING NOTICE


AT LEAST
0.5mm
FOR
DIAPHRAGM
MOVING

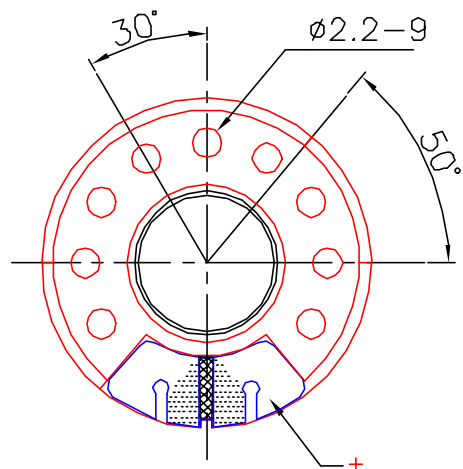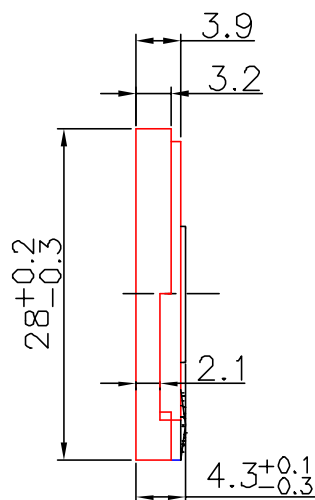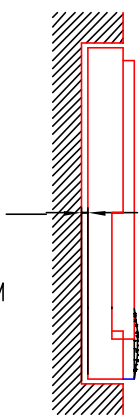

Unit : mm

Housing Material : ABS

28CS08G-75NT Vol:1.265V(0.2W) Dis:0.5M VANSONIC
X:1.0000KHz *Y:85.12dB ZA:1.0000 SSR Fund.

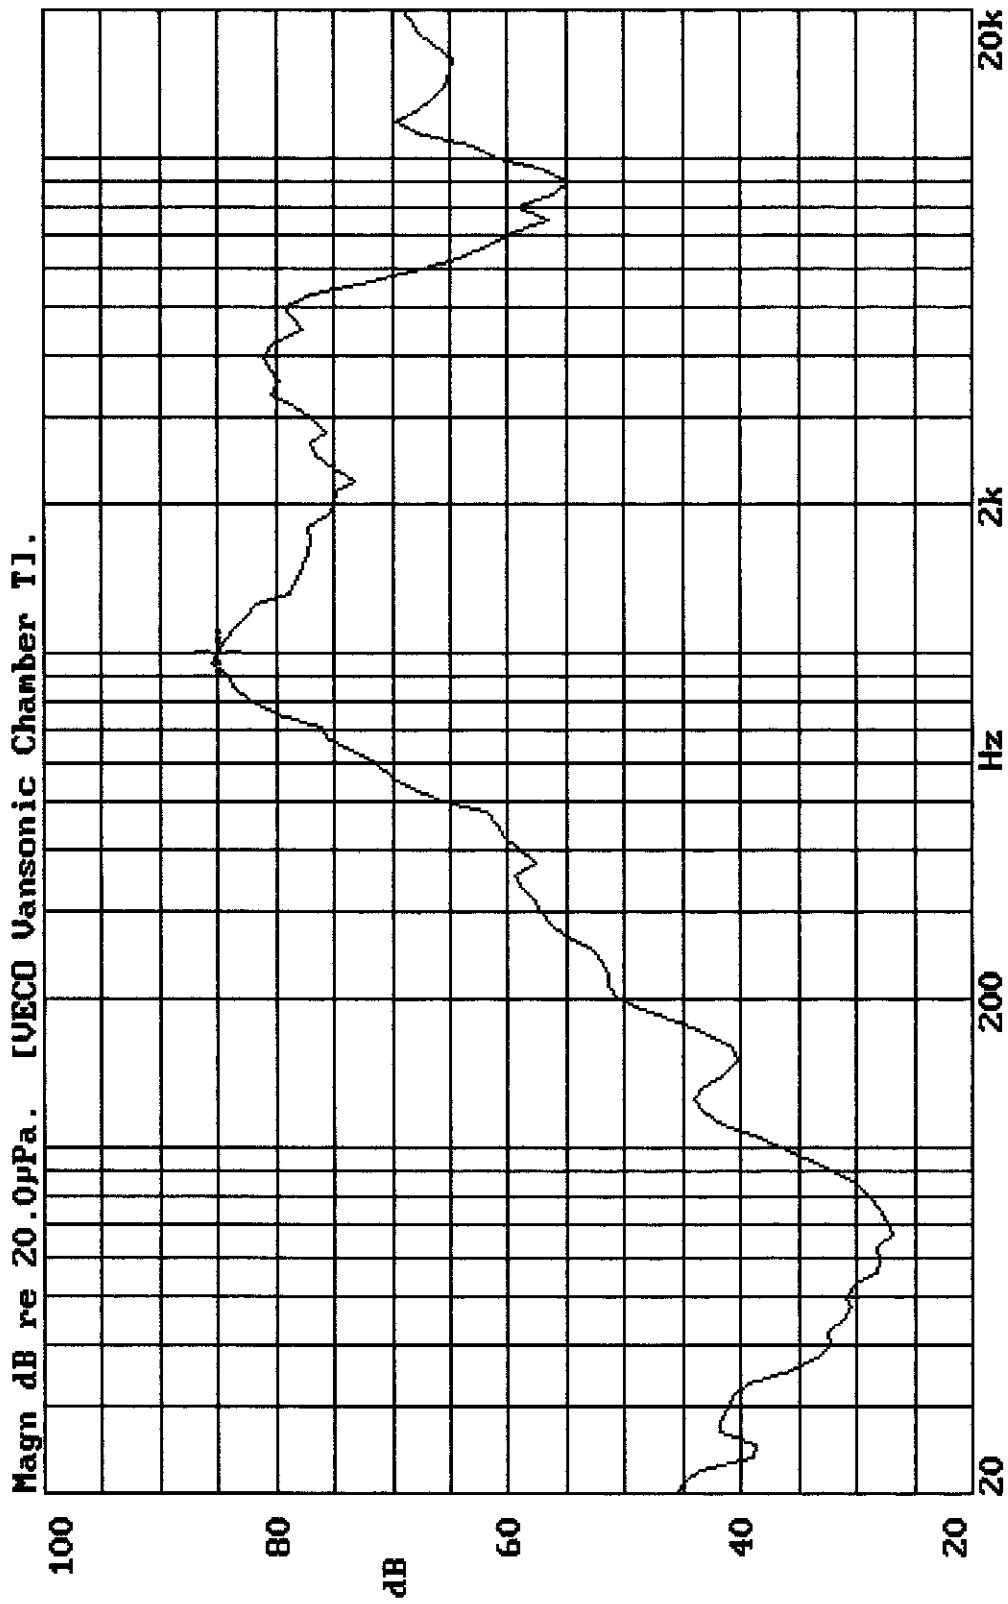

28-JUN-1999 17:27:39

Mode : SSR

