

VECO VANSONIC ENTERPRISE CO., LTD.

8F., No. 7, Lane 16, Sec. 2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.




TEL: +886-2-29626335

FAX: +886-2-29625220

1.	MODEL:	36CS08FN-3 -I50BD(Resistant High Temperature)					
2.	Dimension	Outer Diameter	36	mm.	Baffle Opening	32	mm.
		Height	Refer to Drawing .		Weight	8.0	Grams.
3.	Magent	Materials	Rare Earth .		Size	ϕ 12.5x1.5 mm.	
4.	Nominal Impedance	8	±	15	%	At	1500 Hz.
5.	Power Rating	Normal	1	W.	Maximum	1.5	W.
6.	Lowest Resonant Frequency	570	±	20		%	Hz.
7.	Output Sound Pressure Level (S.P.L.)	92 ± 3 db / 1 Watt . 0.5 Meter.					
		Average at		800,	1000,	1200,	1500
8.	Frequency Range	300	~	5000		Hz.	Average SPL - 10 db.
9.	Distortion	5	%	Maximum At	1000	Hz.	1 W.
10.	Abnormal Sound Test	Must Be Normal Test By 2.9 Volts. Sine Wave.					
11.	Load Test	White Noise With Weighted Filter 2.9 Volts.(RMS) 96 Hrs.					
12.	Storage Temperature	- 40° C ~ + 90° C					
13.	Operating Temperature	- 40° C ~ + 85° C					
14.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the "+" or "Marked" Terminal.					

MOUNTING NOTICE


AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

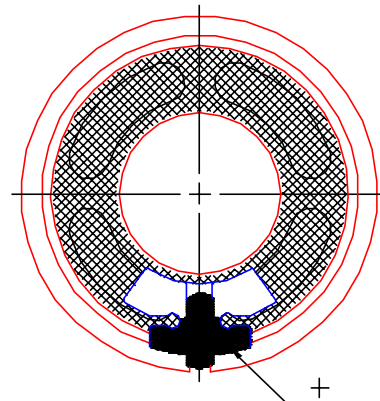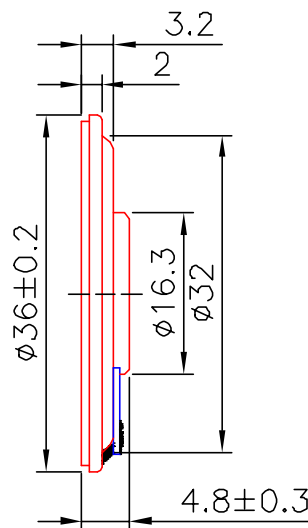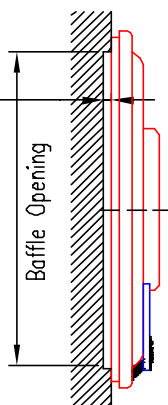

Unit : mm

Housing Material : METAL

36CS08FN-3-150BD VOL:2.828V(1W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:93.45dB ZA:Live Curve SSR Fund.

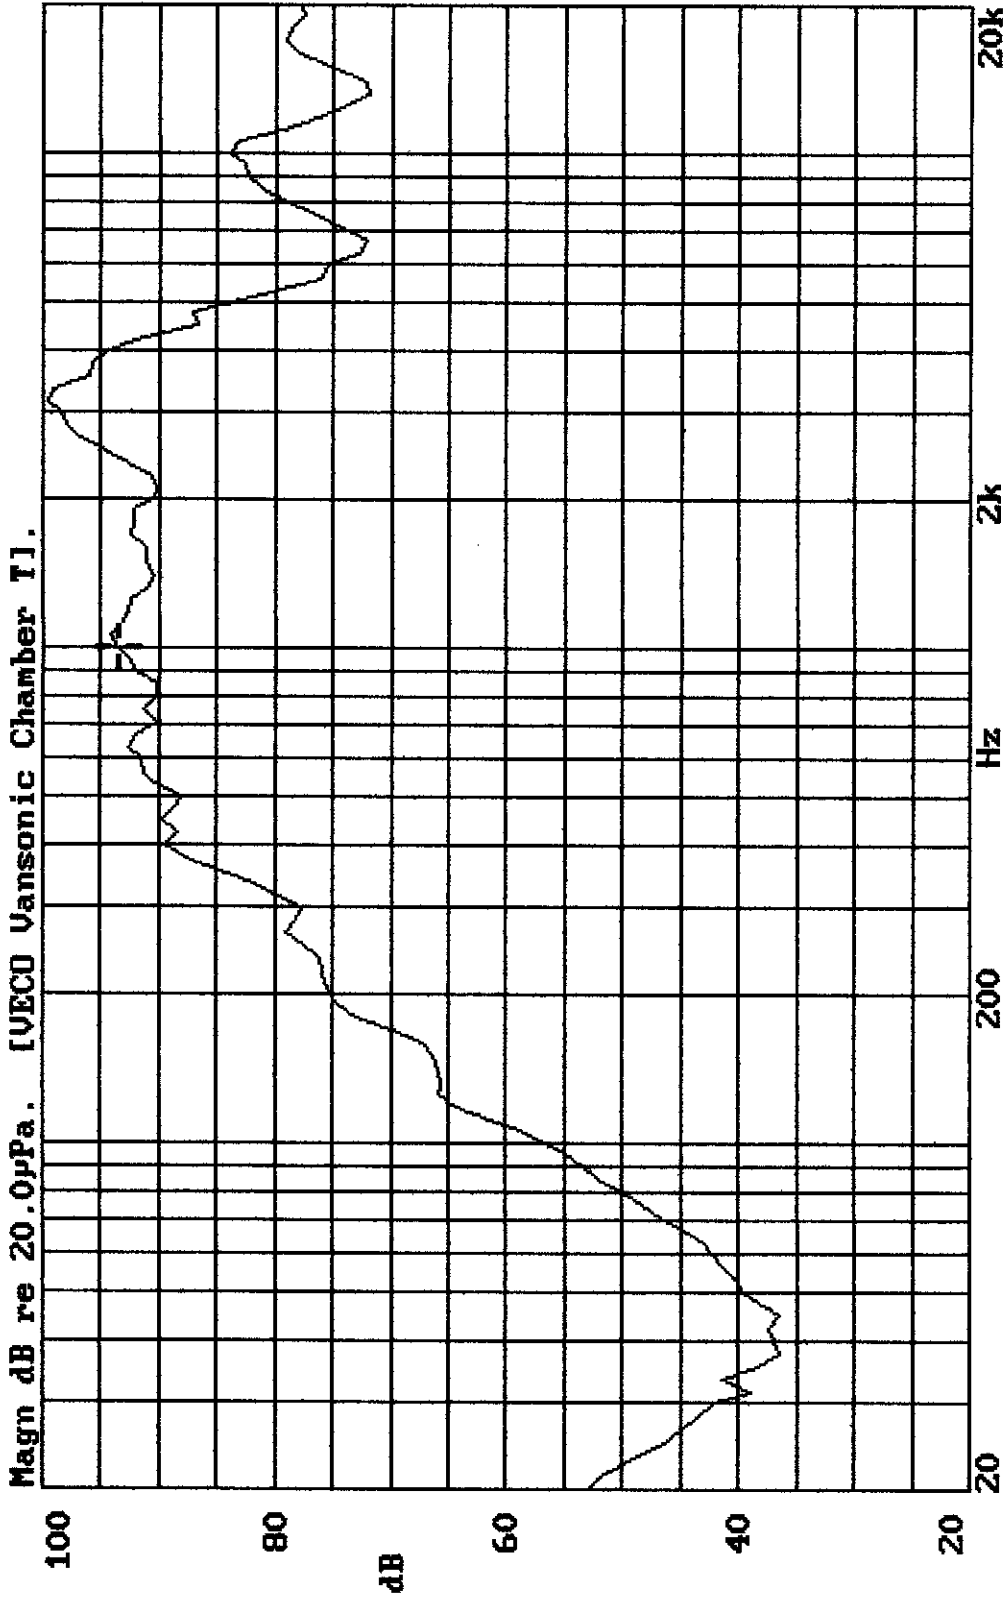

24-JAN-2002 12:59:09

Mode: SPEAKER

