

VECO VANSONIC ENTERPRISE CO., LTD.


8F., No.7, Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335

FAX: +886-2-29625220

1.	MODEL:	36CS08G-3-E75NT(Resistant High Temperature)			
2.	Dimension	Outer Diameter	36 mm.	Baffle Opening	32.5 mm.
		Height	Refer to Drawing .	Weight	4.6 Grams.
3.	Magent	Materials	Rare Earth .	Size	∅ 12.5x1.5 mm.
4.	Nominal Impedance	8 Ω	± 15 %	At	1500 Hz.
5.	Power Rating	Normal	200 mW.	Maximum	400 mW.
6.	Lowest Resonant Frequency	650	± 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	83	± 3 db /	0.2 Watt	0.5 Meter.
		Average at 800, 1000, 1200, 1500 Hz.			
8.	Frequency Range	450	~ 5300 Hz.	Average S P L - 10 db.	
9.	Distortion	5 %	Maximum At	1000 Hz.	200 mW.
10.	Abnormal Sound Test	Must Be Normal Test By		1.3 Volts.	Sine Wave.
11.	Load Test	White Noise With Weighted Filter		1.3 Volts.(RMS)	96 Hrs.
12.	Storage Temperature	-40°C ~ +90°C			
13.	Operating Temperature	-40°C ~ +85°C			
14.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			


MOUNTING NOTICE

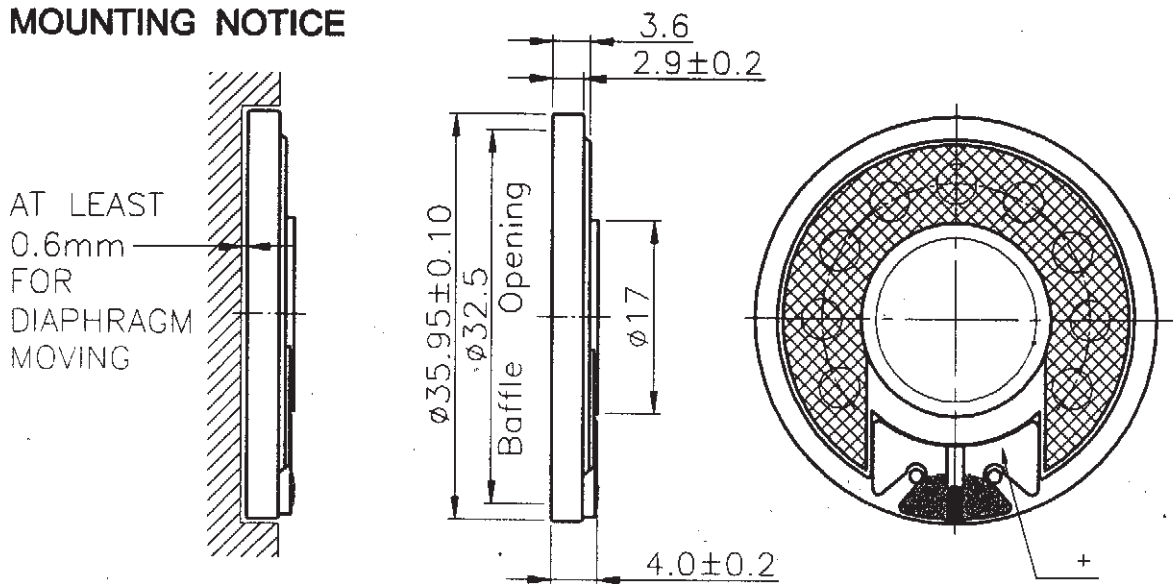

Unit : mm

Housing Material : PBT

36CS08G-3-E75NT Vol:1.265V(0.2W) Dis:0.5M VANSONIC
X:1.0000kHz *Y:80.53dB ZA:1.0000 SSR Fund.

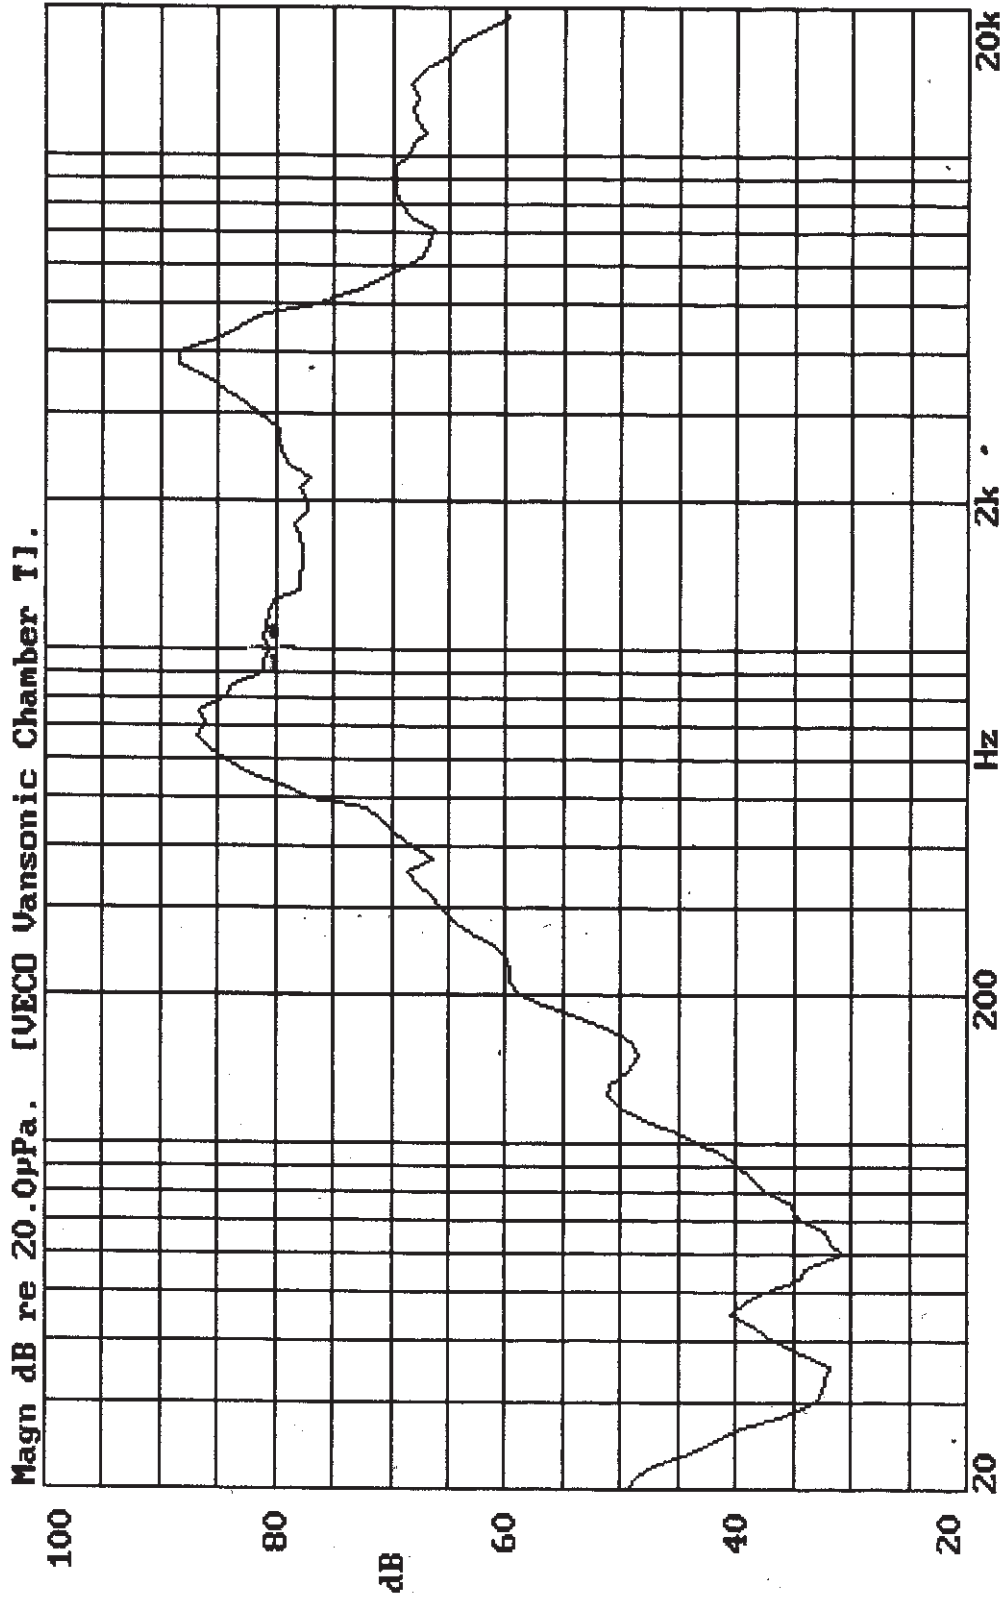

20-NOV-1998 15:20:33

Mode: SSR

