


1.	MODEL:	40KM08			
2.	Dimension	Outer Diameter 14 X 40 mm.		Baffle Opening 12.5X 37 mm.	
		Height	Refer to Drawing.	Weight	3.4 Grams.
3.	Magnet	Materials	Rare Earth	Size	ϕ 12.7X7.7 X 1.5 mm.
4.	Nominal Impedance	8	\pm 15 %	At	1500 Hz.
5.	Power Rating	Normal	1000 mW.	Maximum	1500 mW.
6.	Lowest Resonant Frequency	550	\pm 20 %		Hz.
7.	Output Sound Pressure Lever (S.P.L.)	85 \pm 3 db / 1 Watt . 0.5 Meter.			
		Average at	800, 1000, 1200, 1500		Hz.
8.	Frequency Range	300	~ 20000 Hz.	Average S P L -	10 db.
9.	Distortion	5 %	Maximum At	1000 Hz.	1000 mW.
10.	Abnormal Sound Test	Must Be Normal Test By		2.9 Volts.	Sine Wave.
11.	Load Test	White Noise With Weighted Filter		2.9 Volts.(RMS)	24 Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			


MOUNTING NOTICE

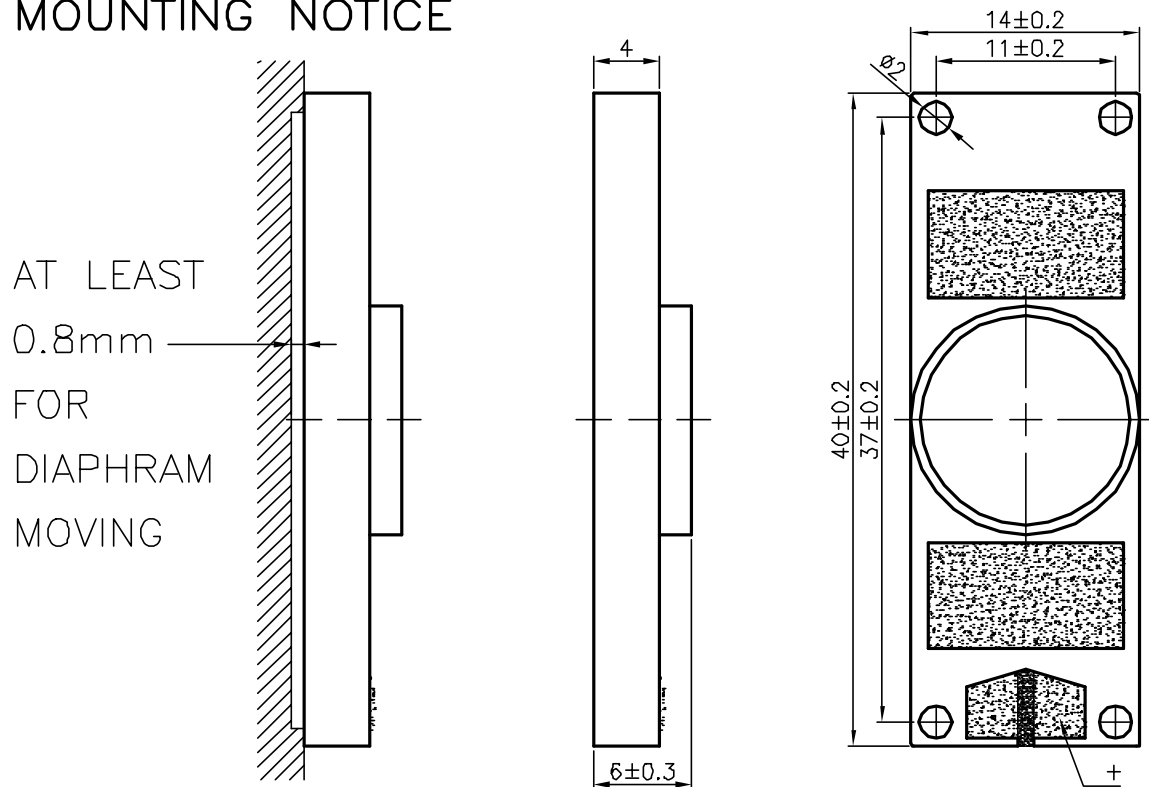

Unit : mm

Housing Material : ABS

40KM08 VOL:2.828V(1W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:86.59dB ZA:Live Curve SSR Fund.

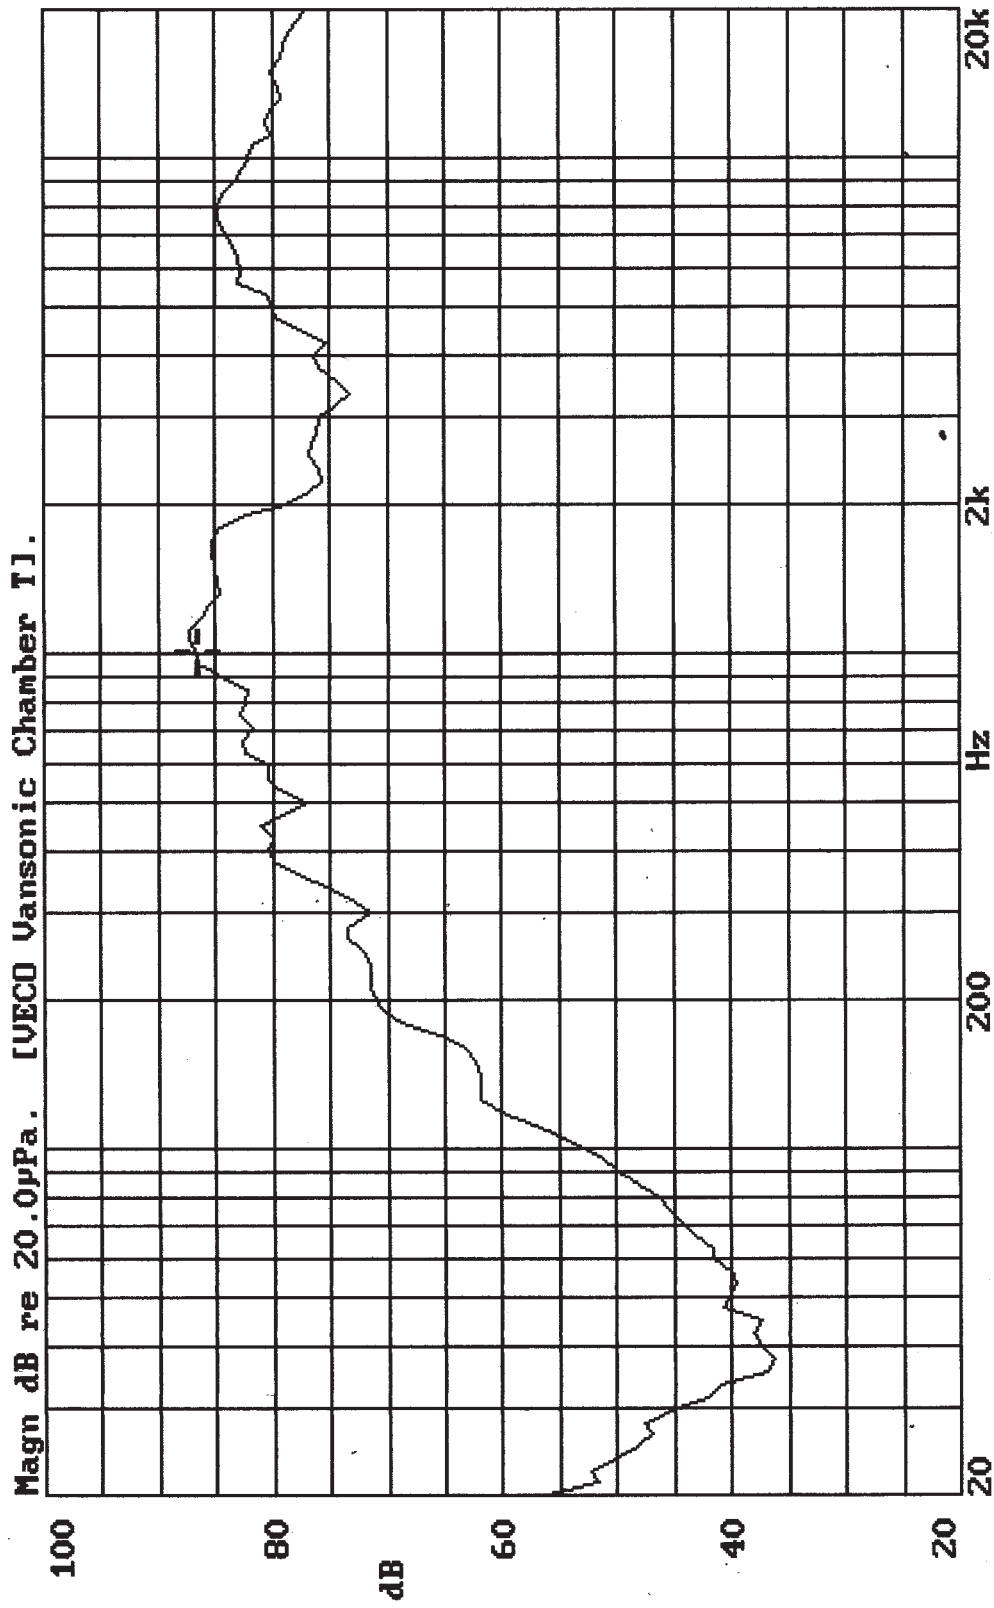

08-OCT-2001 16:15:41

Mode: SSR

