

VECO VANSONIC ENTERPRISE CO.,LTD.

8F.,No.7,Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.


TEL: +886-2-29626335

FAX: +886-2-29625220

E-MAIL: vansonic@ms4.hinet.net

1.	MODEL:	40RE08-1					
2.	Dimension	Outer Diameter	40	mm.	Baffle Opening	36.5	mm.
		Height	Refer to Drawing .		Weight	27.2	Grams.
3.	Magnet	Materials	Rare Earth		Size	∅ 19 X 3.4	mm.
4.	Nominal Impedance	8	±	15	%	At	850 Hz.
5.	Power Rating	Normal	3	W.	Maximum	4	W.
6.	Lowest Resonant Frequency	190	±	20	%	Hz.	
7.	Output Sound Pressure Lever (S.P.L.)	85	±	3	db / 1Watt .	0.5 Meter.	
		Average at	600, 800, 1000, 1200			Hz.	
8.	Frequency Range	100	~	20000	Hz.	Average S P L - 10 db.	
9.	Distortion	5	%	Maximum At	1000	Hz.	1 W.
10.	Abnormal Sound Test	Must Be Normal Test By 4.9 Volts. Sine Wave.					
11.	Load Test	White Noise With Weighted Filter 4.9 Volts.(RMS) 96 Hrs.					
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.					
		Current to the "+" or "Marked" Terminal.					


MOUNTING NOTICE

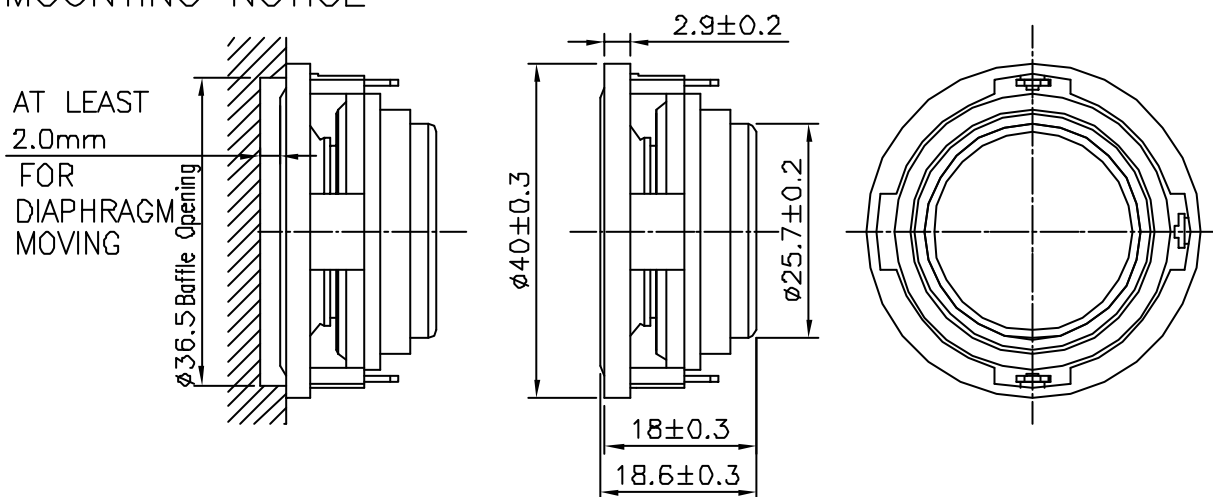

Unit : mm

Housing Material : ABS

P40RE08-1 VOL:2.83V(1W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:84.80dB ZA:1.0000 SSR Fund.

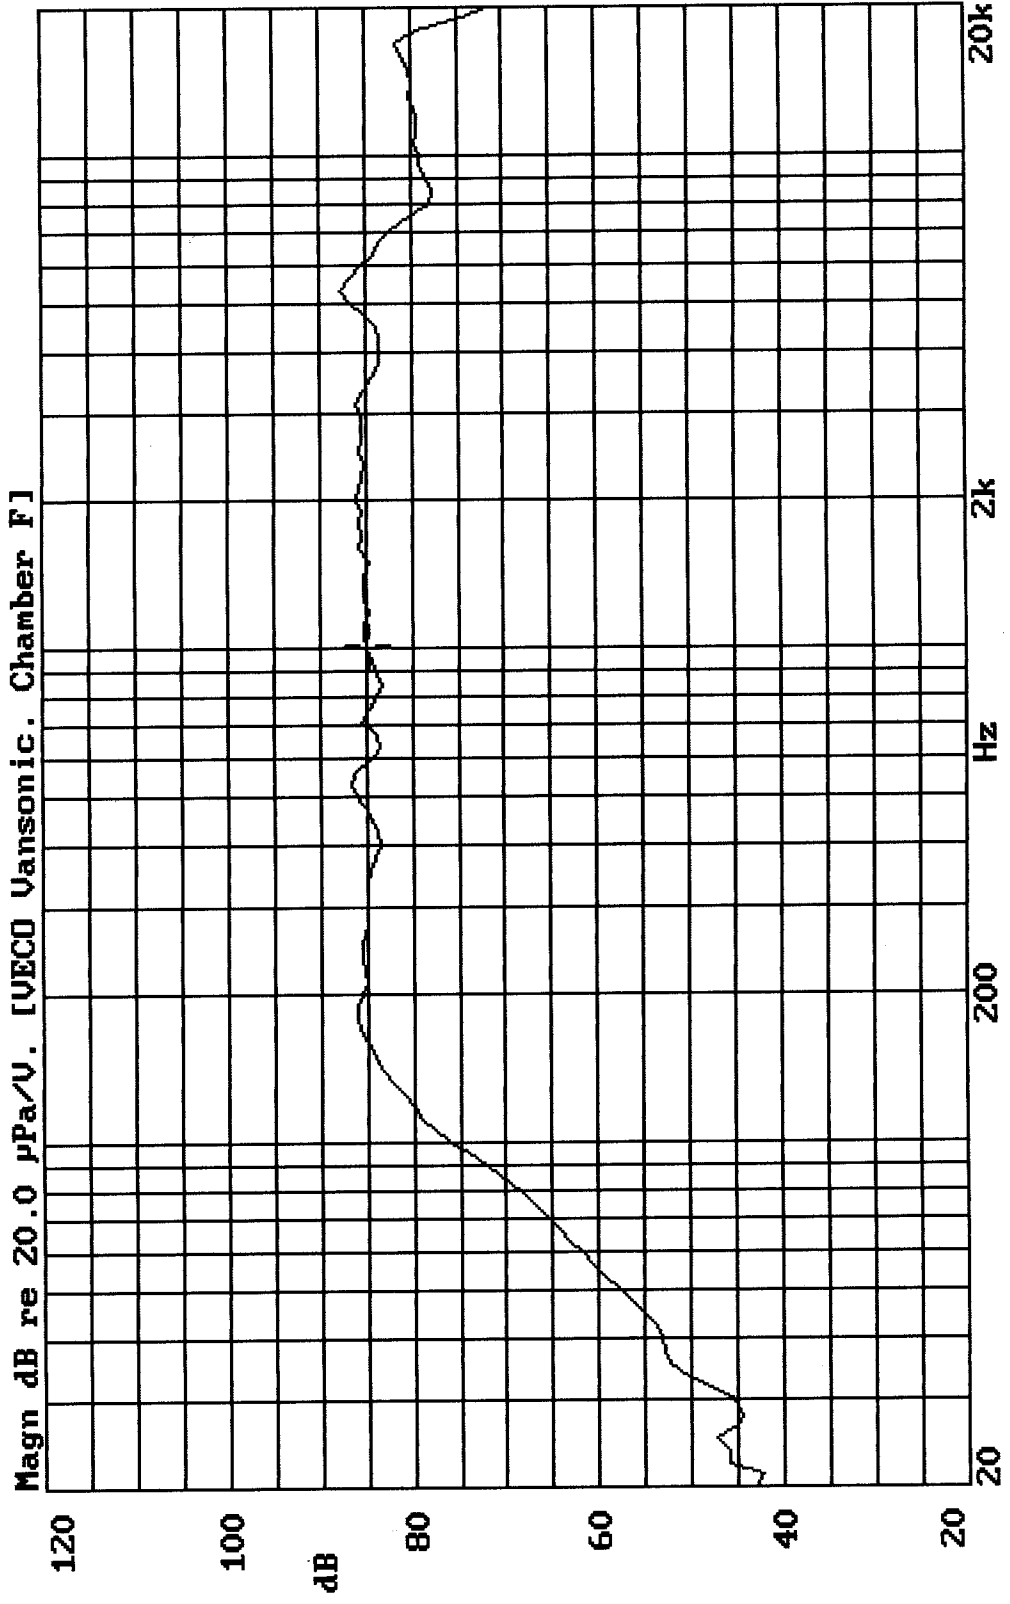

20-SEP-2004 11:04:36

Mode: SSR