

DETAILS

Product Number	CN13164_LENA-WAS
Family	Lena
Type	RefPack
Color	metal
Diameter	111 mm
Height	mm
Style	round
Optic Material	PC
Holder Material	
Fastening	socket
Status	production ready
ROHS Compliant	Yes
Date Updated	5/11/2014



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
CLL04x/CLU04x	Asymmetric deg	Asymmetric	82 %	0.950	-
CXM-22	asymmetric deg	Asymmetric	84 %	0.900	LEDiL: LEDiL
LUXEON CoB 1216	asymmetric deg	Asymmetric	88 %	0.890	LEDiL: LEDiL

D


C

B


A

4

4

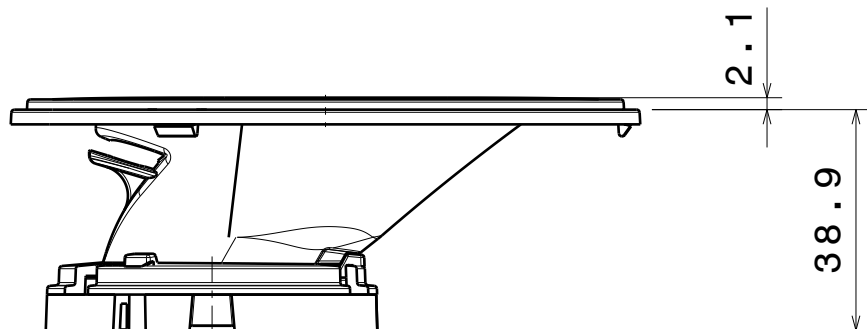


Front view

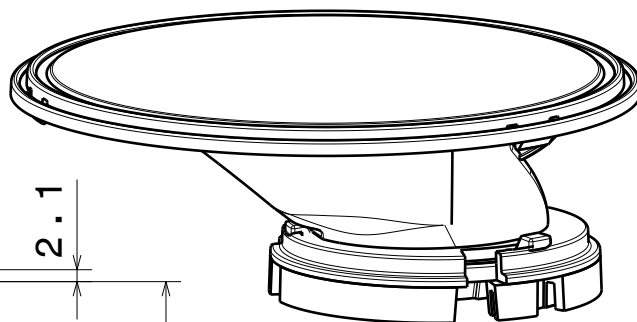


Isometric view

3

3

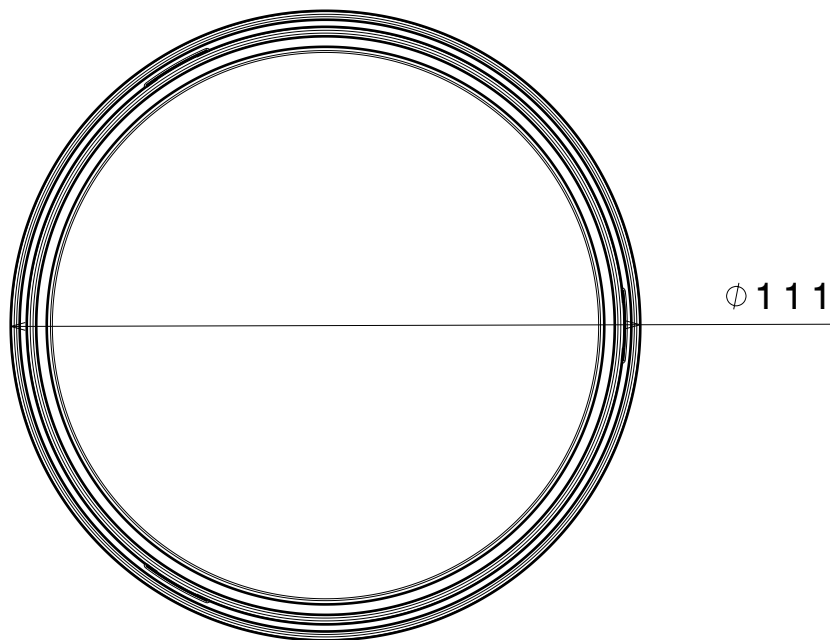

Top view

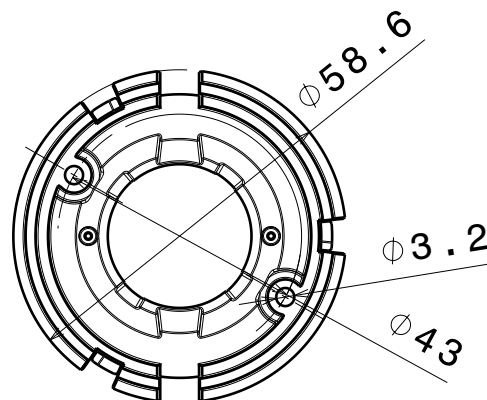

Materials

Reflector: PC
Base part: PC
Sublens: PC

2

2

Note: Using additional sublens add
2,1mm to total height.

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE

Mechanical drawing

DRAWN BY

DATE

as

26.9.2012

LENA-WAS

CHECKED BY

DATE

VS

-

SIZE

PART NUMBER

REV

A4

001

DESIGNED BY

DATE

-

-

SCALE

1:4

WEIGHT

- mg

SHEET

1/1


D

A


1

1

Luminaire: LEDiL Oy CN13164_LENA-WAS_(CLL040) Eff.81.7%
Lamps: 1 x CLL040 (696.603lm@250mA)

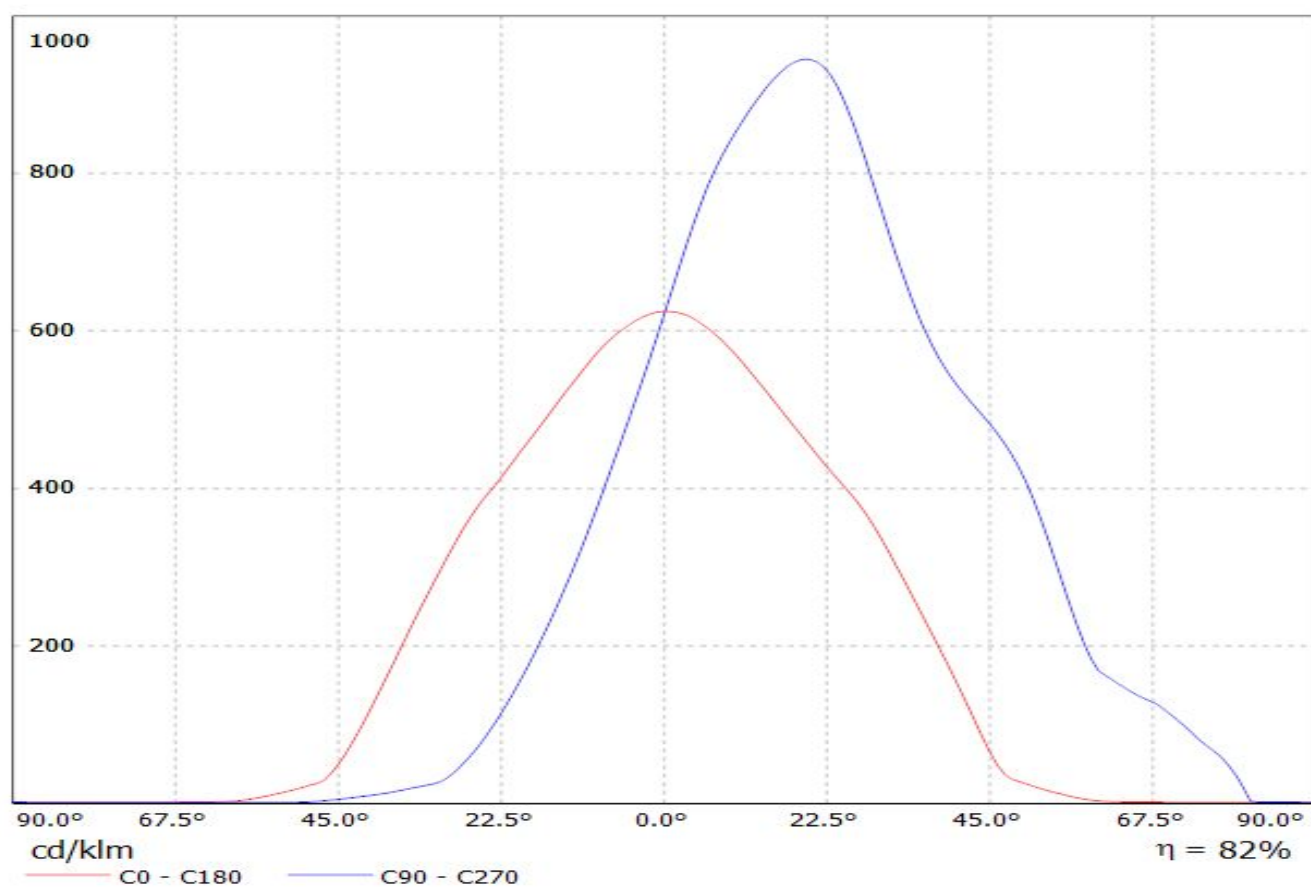


Luminaire: LEDiL Oy CN13164_LENA-WAS_(CXM-22) Eff.84.3%
Lamps: 1 x LUMINUS_CXM-22_1215.27lm@250mA_P=7.9903W_CCT=3000K_I=249.9mA

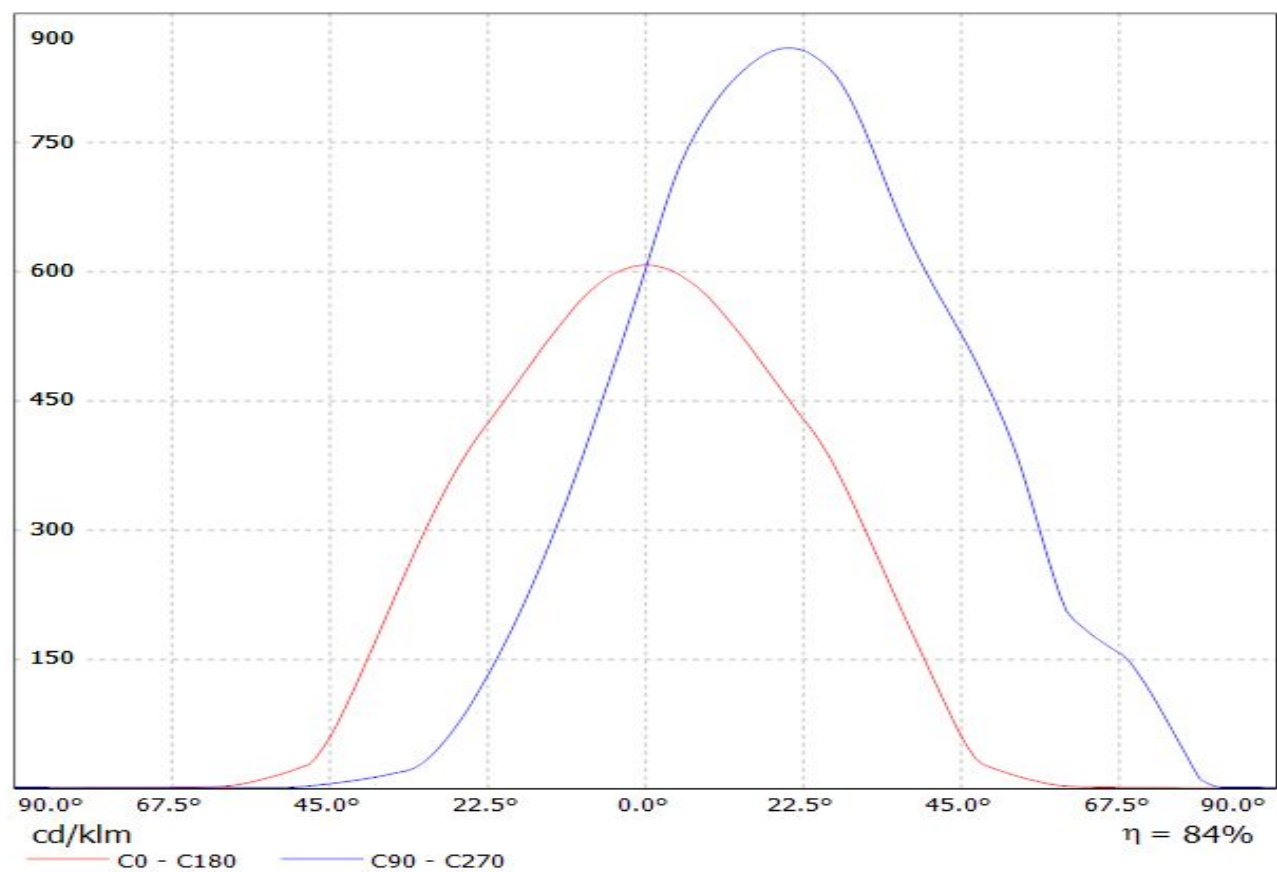


Luminaire: Ledil CN13164_LENA-WAS_(CoB_1216)


Lamps: 1 x Luxeon_CoB_1216_(L2C2-40801216E2300)_1399.13lm@250mA_P=8.0015W_I=0.25A

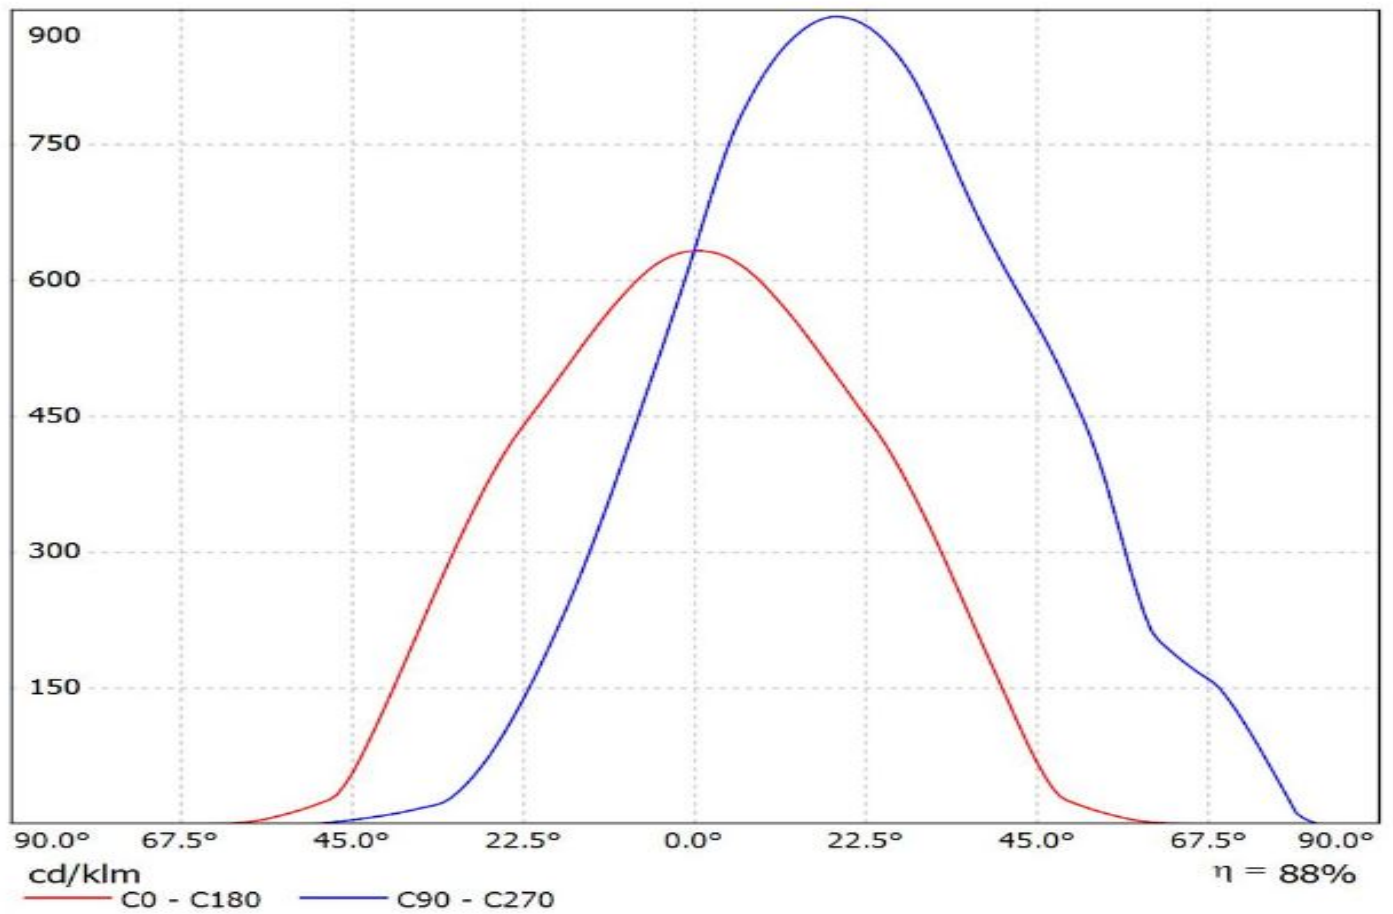


Luminaire: LEDiL Oy CN13164_LENA-WAS_(CLL040) Eff.81.7%
Lamps: 1 x CLL040 (696.603lm@250mA)

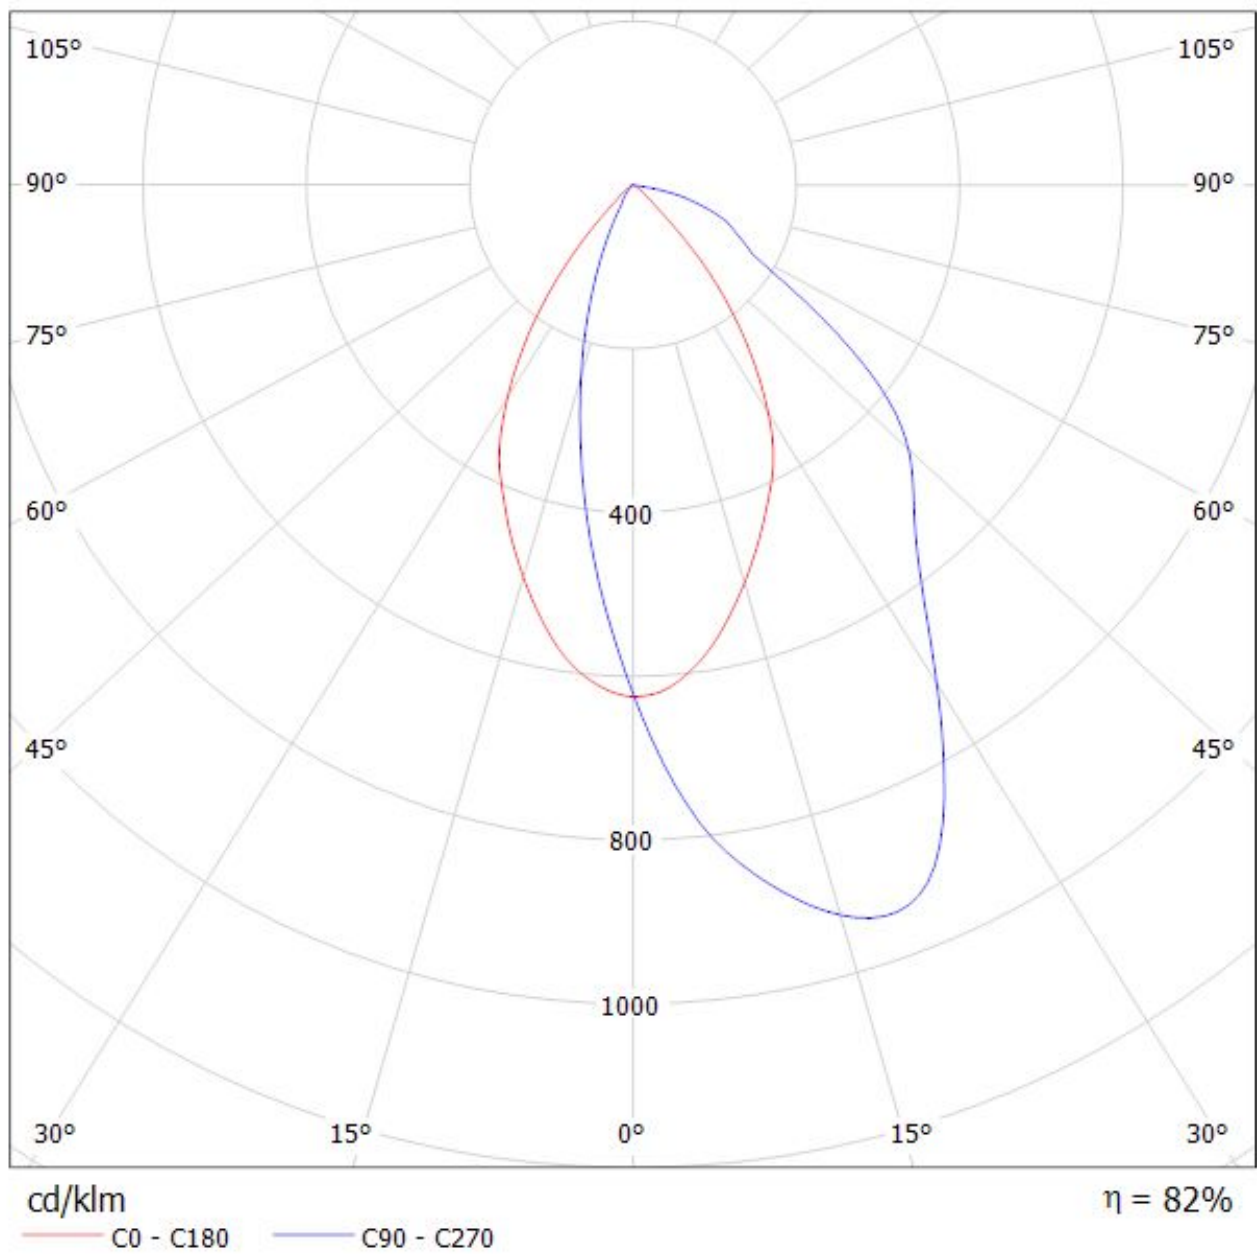

Luminaire: LEDiL Oy CN13164_LENA-WAS_(CXM-22) Eff.84.3%
Lamps: 1 x LUMINUS_CXM-22_1215.27lm@250mA_P=7.9903W_CCT=3000K_I=249.9mA

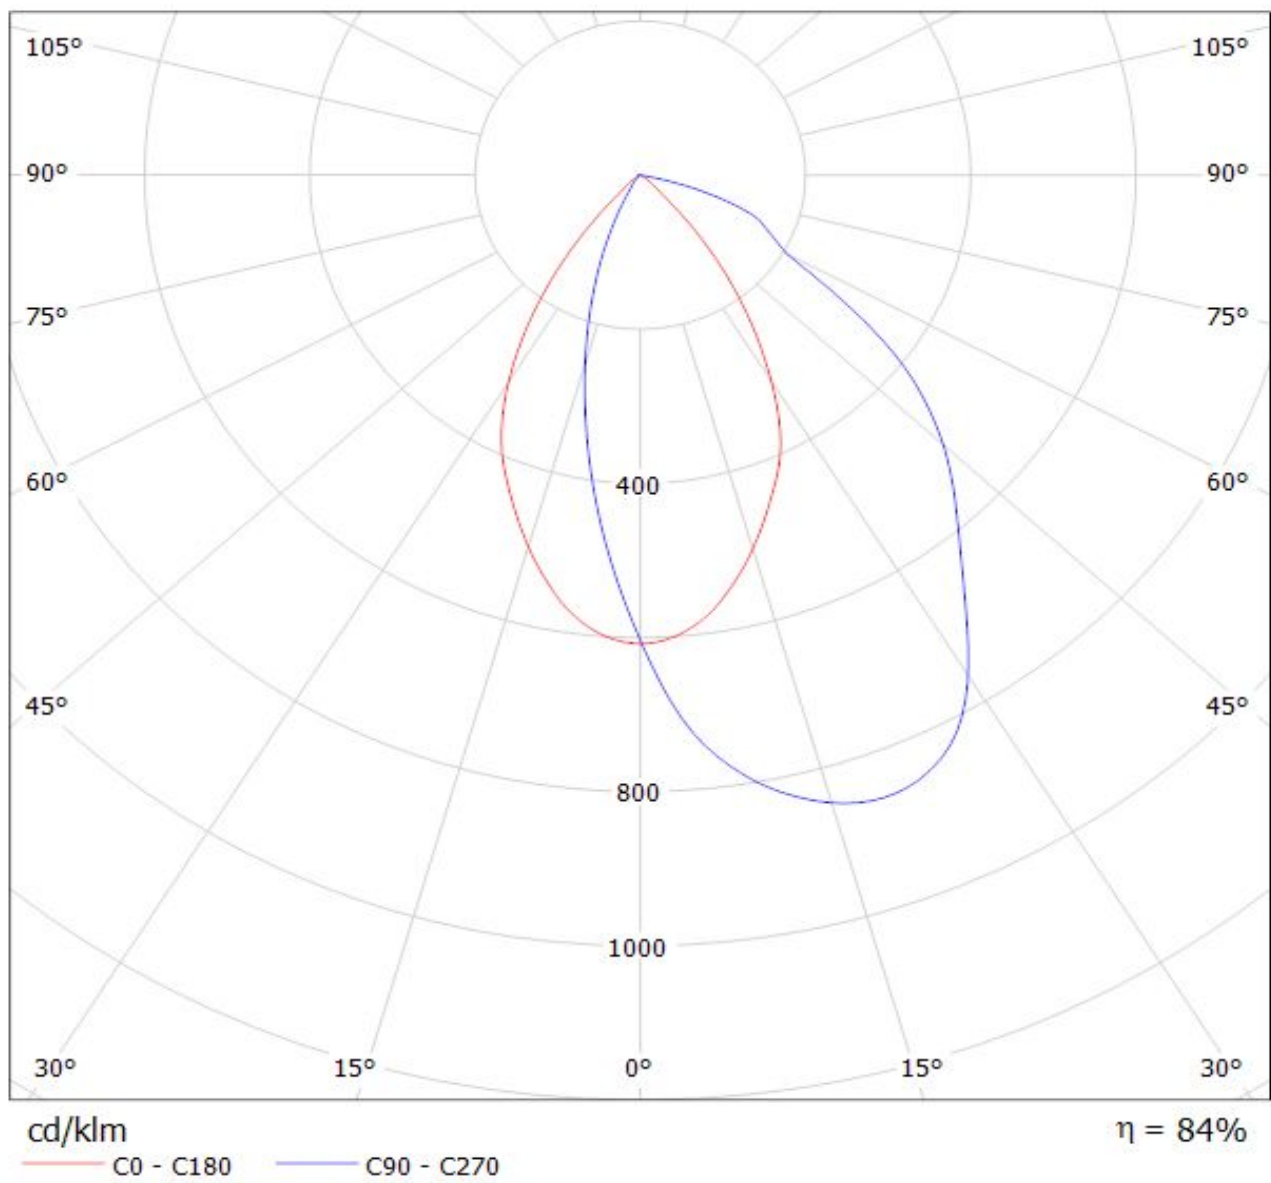

Luminaire: Ledil CN13164_LENA-WAS_(CoB_1216)
Lamps: 1 x Luxeon_CoB_1216_(L2C2-40801216E2300)_1399.13lm@250mA_P=8.0015W_I=0.25A

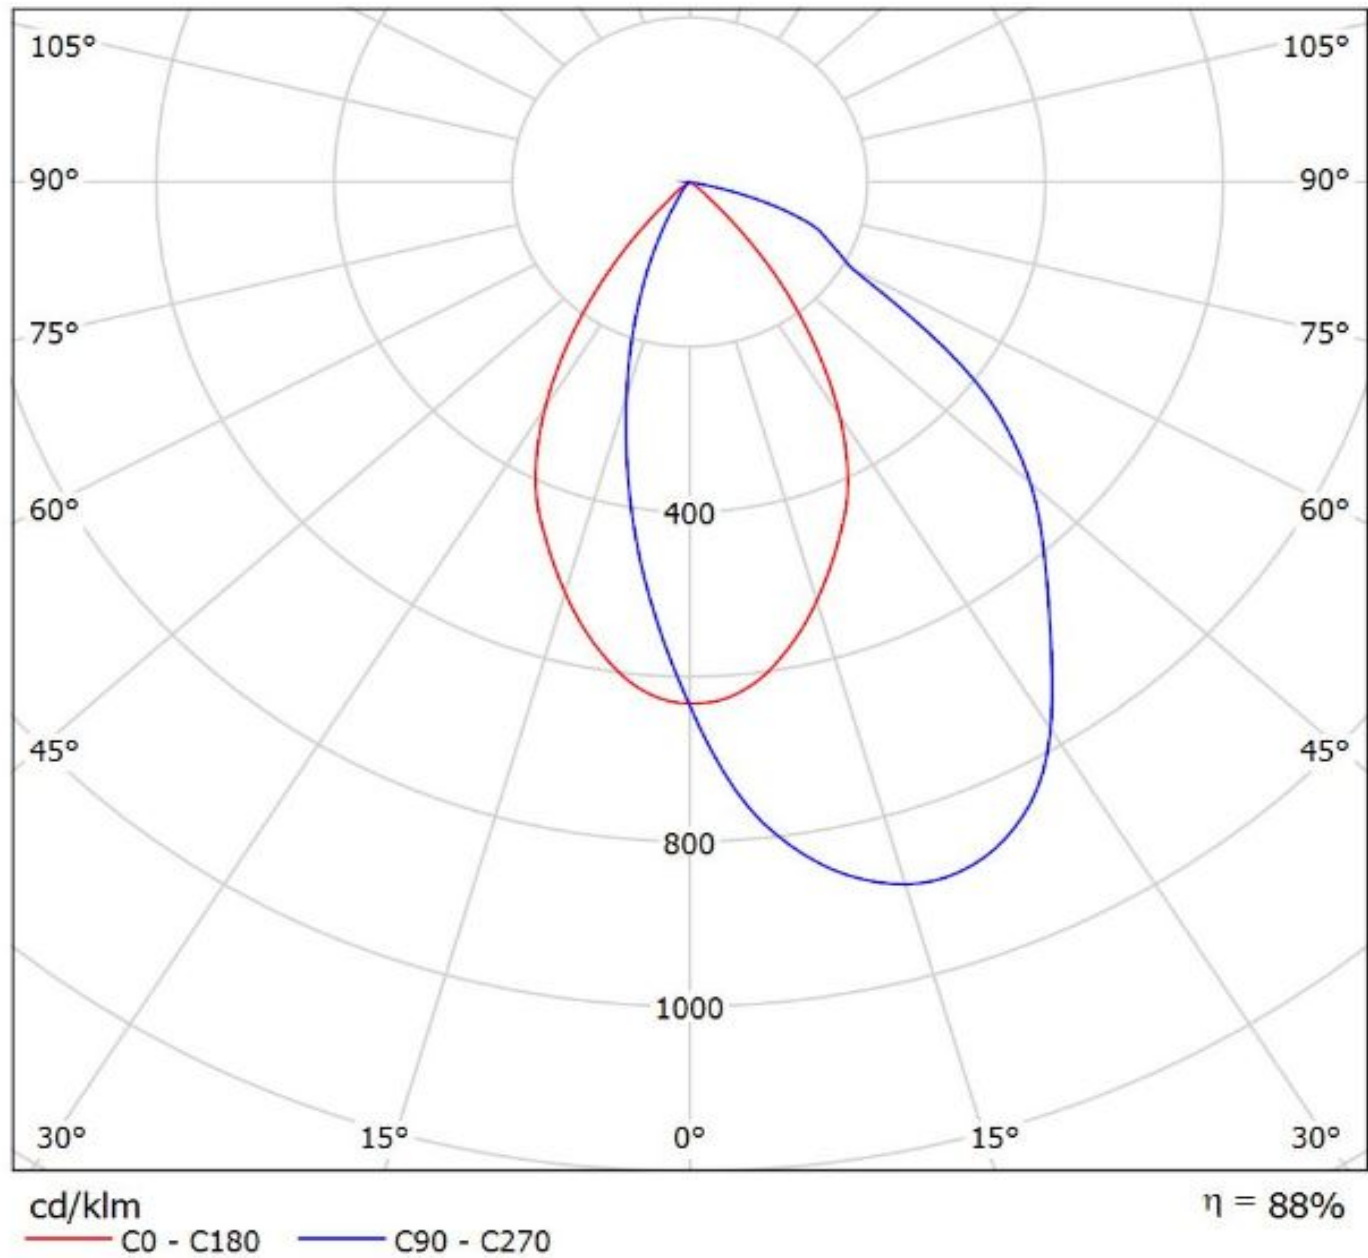

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.