



**SMA**

### Features

- Wide operating voltage
- Low start-up voltage
- Negative temperature coefficient

### Mechanical Data

- Case: SMA, Molded Plastic
- Packing: Tape and Reel
- Flammability rating UL 94V-0
- Halogen Free
- Mounting Position: Any

### Ordering Information

Part No.	Package	Packing
ECRDxxxA	SMA	5000 / Tape & Reel


### Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Part No.	Pinch-off current		Limiting current	Maximum load voltage	Power dissipation
	$I_P @ V=20V$		$V_K$	$V_B$	$P_D$
	Min	Max	$V_K @ 0.8I_{Pmin}$	$V_B @ 1.1I_{Pmax}$	Max
	[mA]	[mA]	Max [V]	[V]	[w]
ECRD020A	16	24	3.5	190	1.2
ECRD040A	36	44	6	190	1.2
ECRD060A	54	66	7	190	1.2
ECRD080A	72	88	8	190	1.2




### Rating and Characteristics Curves

I-V Curve @TA=25°C

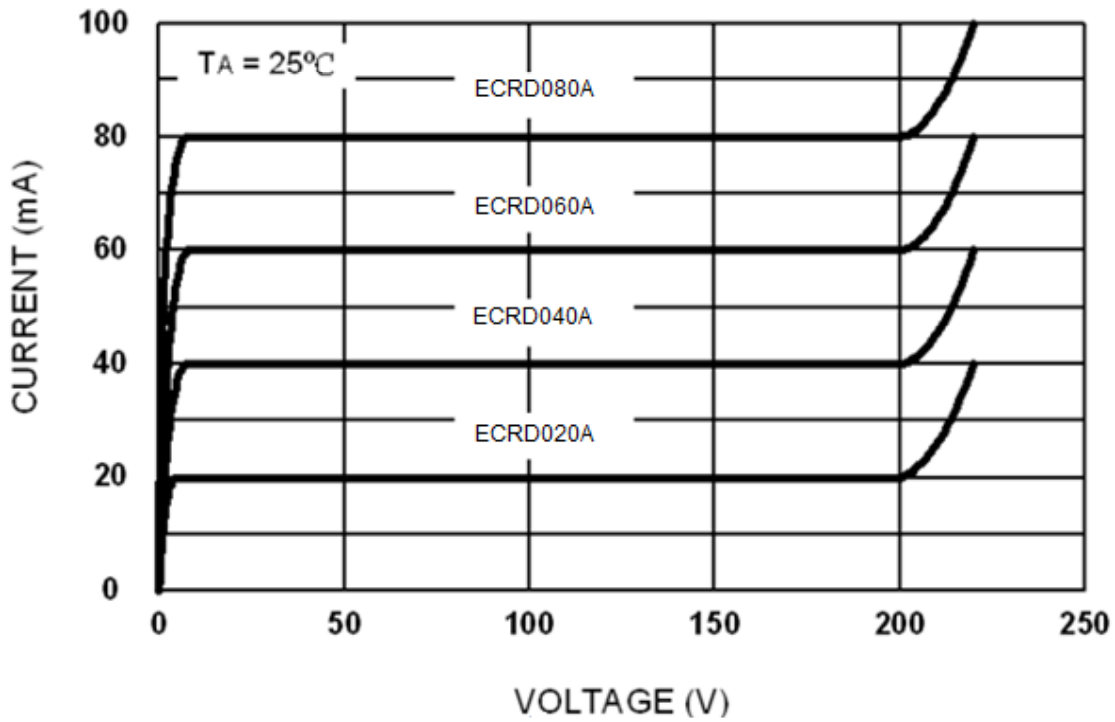


Temperature coefficient curve V=10V

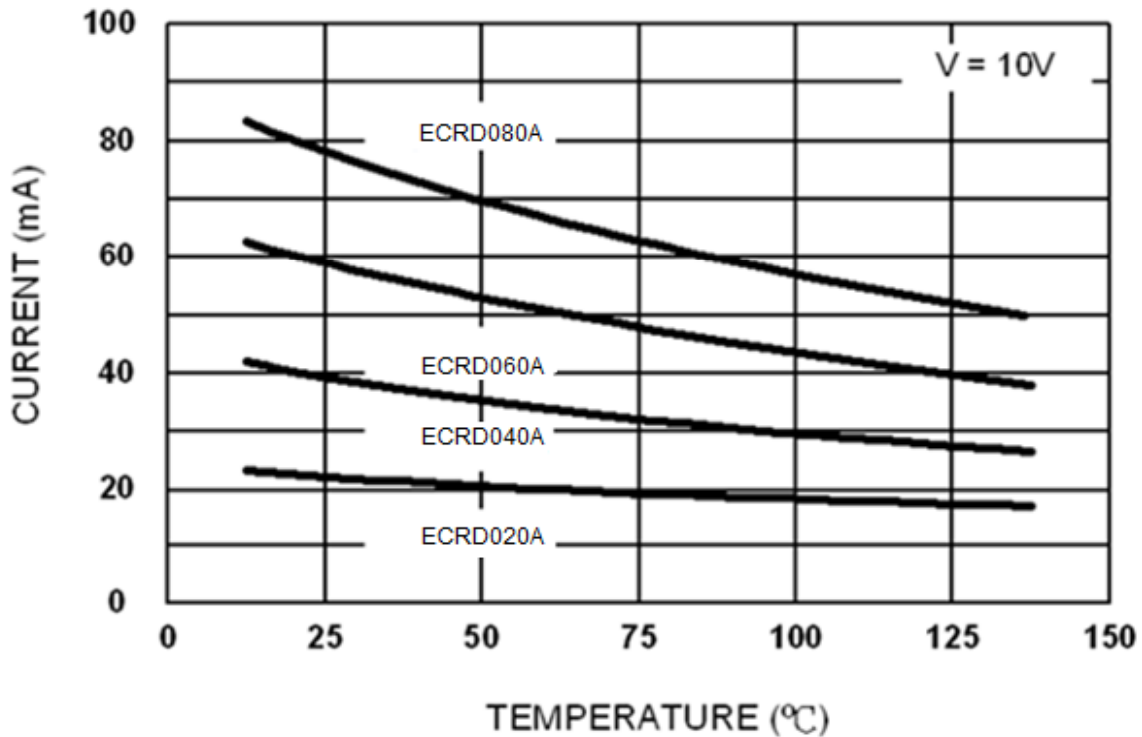



**Package Outline Dimensions**

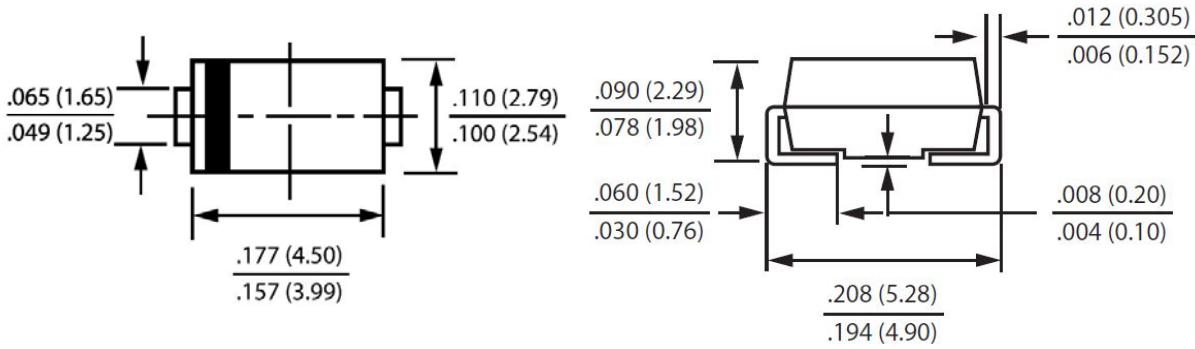


**SMA**

Dimensions in inches and (millimeters)

**Suggested Pad Layout**

Outline Symbol	SMA Unit (mm)
A	6.50
B	1.50
C	1.70
D	2.50
E	4.00

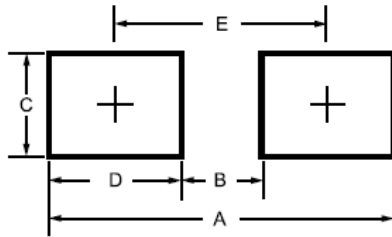

**Tape & Reel Specification**

Item	Symbol	SMA Unit (mm)
Carrier width	A	2.9(max)
Carrier length	B	5.9(max)
Carrier depth	C	2.66(max)
Sprocket hole	d	1.50±0.1
Reel outside diameter	D	330±2
Reel inner diameter	D1	50(min)
Feed hole width	D2	13.5±1
Sprocket hole position	E	1.75±0.10
Punch hole position	F	5.5±0.05
Punch hole pitch	P	4.0±0.10
Sprocket hole pitch	P0	4.0±0.10
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.6(max)
Tape width	W	12.0±0.3
Reel width	W1	18.4(max)

