

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 1 / 25 |

Thin-Film-Transistor LCD Module

Model: GVTV57TPAD2R0

| Acceptance |
|------------|
|            |

**Solomon Goldentek Display Corp.**  
 NO. 18 Ta-Yeh St., Ta-Fa Industrial Park,Ta-Liao  
 Hsiang, Kaohsiung Hsien 831, TAIWAN , R.O.C.  
 FAX: 886-7-7886800

| Approved and Checked by |
|-------------------------|
|                         |

| Approved by                                         | Checked by |                                                     | Made by                                             |
|-----------------------------------------------------|------------|-----------------------------------------------------|-----------------------------------------------------|
| <div>SGD</div> <div>2015.06.23</div> <div>黃思淵</div> |            | <div>SGD</div> <div>2015.06.23</div> <div>胡安義</div> | <div>SGD</div> <div>2015.06.23</div> <div>李枝訓</div> |

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 2 / 25 |

Revise Records

| Rev. | Date       | Contents                               | Written     | Approved     |
|------|------------|----------------------------------------|-------------|--------------|
| A    | 2013/12/17 | Preliminary Specification              | Kavin Chang | Stanley Wang |
| B    | 2015/06/23 | Update LED Life Time 30000Hr → 50000Hr | Oliver Lee  | Steve Huang  |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |
|      |            |                                        |             |              |

Special Notes

|        |  |
|--------|--|
| Note1. |  |
| Note2. |  |
| Note3. |  |
| Note4. |  |
| Note5. |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |
|        |  |

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 3 / 25 |

## Contents

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>1.General Description and Features .....</b>   | <b>4</b>  |
| 1.1 Features .....                                | 4         |
| 1.2 LCD Module .....                              | 4         |
| <b>2.Mechanical Information.....</b>              | <b>4</b>  |
| <b>3.Electrical Specifications .....</b>          | <b>5</b>  |
| 3.1 Absolute Max. Ratings .....                   | 5         |
| 3.2 Electrical Characteristics.....               | 7         |
| 3.3 AC Timing Characteristic of The LCD .....     | 8         |
| 3.4 Back-Light Unit.....                          | 11        |
| <b>4.Optical Characteristics .....</b>            | <b>12</b> |
| 4.1 Optical characteristic of the LCD.....        | 12        |
| <b>5.I / O Terminal.....</b>                      | <b>15</b> |
| 5.1 Pin Assignment .....                          | 15        |
| 5.2 Back-light Unit (BLU) .....                   | 16        |
| 5.3 Block Diagram .....                           | 17        |
| 5.4 Basic Display Color and Gray Scale .....      | 18        |
| <b>6.Touch screen panel .....</b>                 | <b>19</b> |
| 6.1 Electrical Characteristics.....               | 19        |
| 6.2 Mechanical & Reliability Characteristics..... | 19        |
| 6.3 Touch Panel Unit .....                        | 19        |
| <b>7.Reliability Condition.....</b>               | <b>20</b> |
| <b>8.Dimensional Outlines .....</b>               | <b>21</b> |
| <b>9.Incoming Inspection Standards .....</b>      | <b>22</b> |
| 9.1 Inspection and Environment Conditions.....    | 22        |

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 4 / 25 |

## 1. General Description and Features

GVTV57TPAD2R0 is a transmissive type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT-LCD module, a driver circuit and a back-light unit. Graphics and texts can be displayed on a VGA 640 (W) x 3 x 480 (H) dots with 262,144 colors by supplying 18 bits data signal (6bits/each color). The following table described the features of GVTV57TPAD2R0.

### 1.1 Features

- Transmissive and back-light with 30th LEDs are available.
- TN (Twisted Nematic) mode.
- LVDS (6bits/color) data transfer.
- Clock signal: latching data at the falling edge.
- RoHS Compliance

### 1.2 LCD Module

| Item               | Specification                                | Unit     |
|--------------------|----------------------------------------------|----------|
| Screen Size        | 5.7 inches                                   | Diagonal |
| Display Resolution | 640 (H) x 480 (V)                            | Pixel    |
| Active Area        | 115.20 (H) x 86.40 (V)                       | mm       |
| Display Mode       | Normally white mode/ Transmissive/ Wide view | --       |
| Pixel Arrangement  | R,G,B Vertical Tripe                         | --       |
| Pixel size         | 181.5 x 181.5                                | um       |
| Display Color      | 262K Colors                                  | --       |
| Viewing Direction  | 6 o'clock(Gray inversion)                    | --       |
| Input Interface    | LVDS (6bits/color) Data Transfer             | --       |

## 2. Mechanical Information

| Item        |                | Min. | Typ.   | Max. | Unit | Note    |
|-------------|----------------|------|--------|------|------|---------|
| Module Size | Horizontal (H) | --   | 144.00 | --   | mm   | (1,2,3) |
|             | Vertical (V)   | --   | 104.60 | --   | mm   | (2)     |
|             | Thickness (T)  | --   | 14.5   | --   | mm   | (1,3)   |
| Weight      |                | --   | TBD    | --   | g    | --      |

Note (1) Not include FPC. Refer to the Outline Dimension Drawing as attached.

(2) Back-light unit is included.

(3) Excluding backlight cables.

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 5 / 25 |

### 3. Electrical Specifications

#### 3.1 Absolute Max. Ratings

##### 3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.


(Ta=25±2°C, V<sub>SS</sub>=GND=0)

| Item                  | Symbol           | Min. | Max. | Unit | Note    |
|-----------------------|------------------|------|------|------|---------|
| Storage temperature   | T <sub>STG</sub> | -30  | 80   | °C   | (1)     |
| Operating temperature | T <sub>OPR</sub> | -30  | 80   | °C   | (1,2,3) |

Note (1) 90 % RH Max. ( 40 °C ≥ Ta ). Maximum wet-bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

Note (2) In case of below 0°, the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character

Note (3) Only operation is guarantied at operating temperature. Contrast, response time, another display quality are evaluated at +25°C.

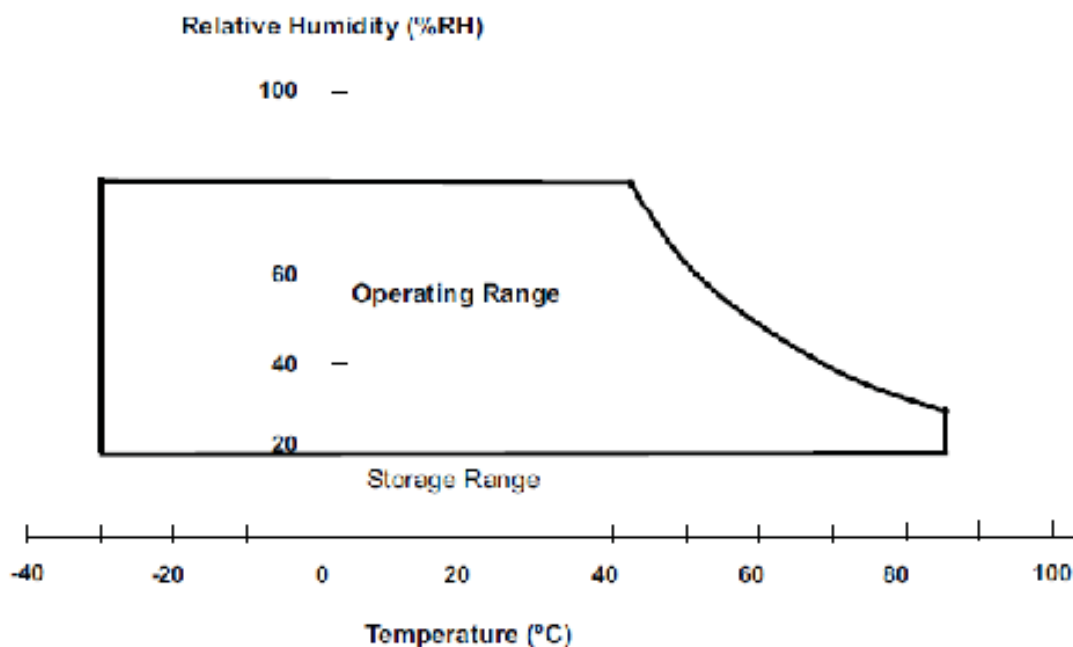

## Product Specification


|                                                                                   |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 6 / 25 |

### 3.1.2 Electrical Absolute Maximum Ratings

( $V_{SS}=GND=0$ )

| Parameter                       | Symbol                        | Min. | Max.         | Unit  | Remark           |
|---------------------------------|-------------------------------|------|--------------|-------|------------------|
| Power supply voltage            | $V_{CC}$                      | -0.3 | 5.0          | V     |                  |
| Signal input voltage            | R0-R5,G0-G5,<br>B0-B5,DCLK,DE | -0.3 | $V_{CC}+0.3$ | V     | --               |
| Permissive input ripple voltage | $V_{RF}$                      | --   | 100          | mVp-p | $V_{CC} = +3.3V$ |

Display On/Off Sequence :

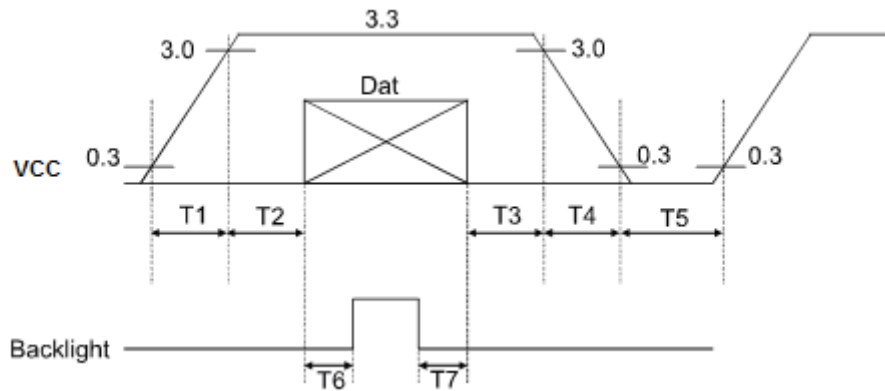

Data: DCLK, R0 ~ R5, G0 ~ G5, B0 ~ B5, DE

$T1 \leq 10ms$ ,  $50ms \leq T2$ ,  $0 < T3 \leq 50ms$ ,  $0 < T4 \leq 10ms$ ,  $1s \leq T5$ ,  $200ms \leq T6$ ,  $200ms \leq T7$

| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 7 / 25 |


3.2 Electrical Characteristics

3.2.1 DC Electrical Characteristics of the TFT LCD


(Ta=25±2°C, VSS=GND=0)

| Item                    |         | Symbol | Min.   | Typ.  | Max.   | Unit | Remark |
|-------------------------|---------|--------|--------|-------|--------|------|--------|
| Power supply            |         | VCC    | 3.0    | 3.3   | 3.6    | V    | Note 1 |
| Input Voltage for logic | H Level | VIH    | 0.7VCC | -     | VCC    | V    |        |
|                         | L Level | VIL    | 0      | -     | 0.3VCC | V    |        |
| Power Supply current    |         | ICC    |        | (120) | (160)  | mA   | Note 2 |

Note1: Vcc-dip conditions  
Vcc-dip conditions should also follow the Vcc-turn-on conditions  
Td ≤ 10ms

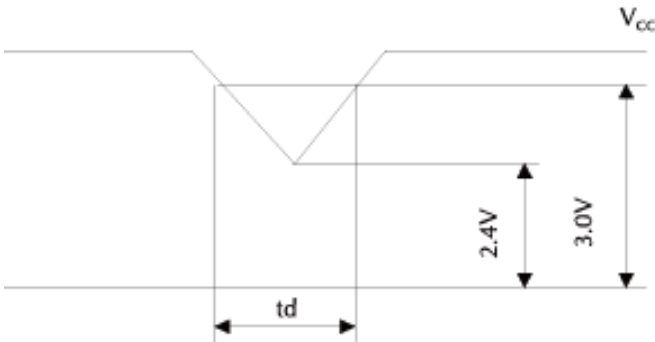

Note2: fv =60Hz , Ta=25°C , Display pattern : Black pattern



| Product Specification                                                             |                      |          |              |        |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|--------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.  |
|                                                                                   |                      | B        | 2015,JUN,23  | 8 / 25 |

### 3.3 AC Timing Characteristic of The LCD

#### 3.3.1 Timing Condition

| Parameter                     | Symbol    | Min.  | Typ.   | Max.  | Unit.     | Remark |
|-------------------------------|-----------|-------|--------|-------|-----------|--------|
| CLK frequency                 | $F_{CPH}$ | 22.66 | 25.175 | 27.69 | MHZ       |        |
| CLK period                    | $T_{CPH}$ | 36.11 | 39.7   | 44.13 | ns        |        |
| CLK pulse duty                | $T_{CWH}$ | 40    | 50     | 60    | %         |        |
| HS period                     | $T_H$     | 750   | 800    | 850   | $T_{CPH}$ |        |
| HS pulse width                | $T_{WH}$  | 5     | 30     | --    | $T_{CPH}$ |        |
| HS-first horizontal data time | $T_{HS}$  | 112   | 144    | 175   | $T_{CPH}$ |        |
| Display period                | $T_{HA}$  | --    | 640    | --    | $T_{CPH}$ |        |
| HS setup time                 | $T_{HST}$ | 10    | --     | --    | ns        |        |
| HS hold time                  | $T_{HHD}$ | 10    | --     | --    | ns        |        |
| VS pulse width                | $T_{WV}$  | 1     | 3      | 5     | $T_H$     |        |
| First line data input time    | $T_{STV}$ | --    | 35     | --    | $T_H$     |        |
| VS period                     | $T_V$     | 515   | 525    | 535   | $T_H$     |        |
| VS setup time                 | $T_{VST}$ | 10    | --     | --    | ns        |        |
| VS hold time                  | $T_{VHD}$ | 10    | --     | --    | ns        |        |

Note : When SYNC mode is used, 1st data start from 144th CLK after HS falling (when  $STHD[5:0]=00000$ )

| Parameter               | Symbol    | Min. | Typ. | Max. | Unit.     | Remark |
|-------------------------|-----------|------|------|------|-----------|--------|
| DEN Period              | $T_{DEN}$ | --   | 800  | --   | $T_{CPH}$ |        |
| DEN pulse width         | $T_{EP}$  | --   | 640  | --   | $T_{CPH}$ |        |
| DEN frame active time   | $T_{DEA}$ | --   | 480  | --   | $T_{DEN}$ |        |
| DEN frame blanking time | $T_{DEB}$ | --   | 45   | --   | $T_{DEN}$ |        |
| DEN setup time          | $T_{ESU}$ | 10   | --   | --   | ns        |        |



## Product Specification



Model: GVTV57TPAD2R0

Rev. No.

Issued Date.


Page.

B


2015,JUN,23

9 / 25


### 3.3.2 Clock and Data Waveform

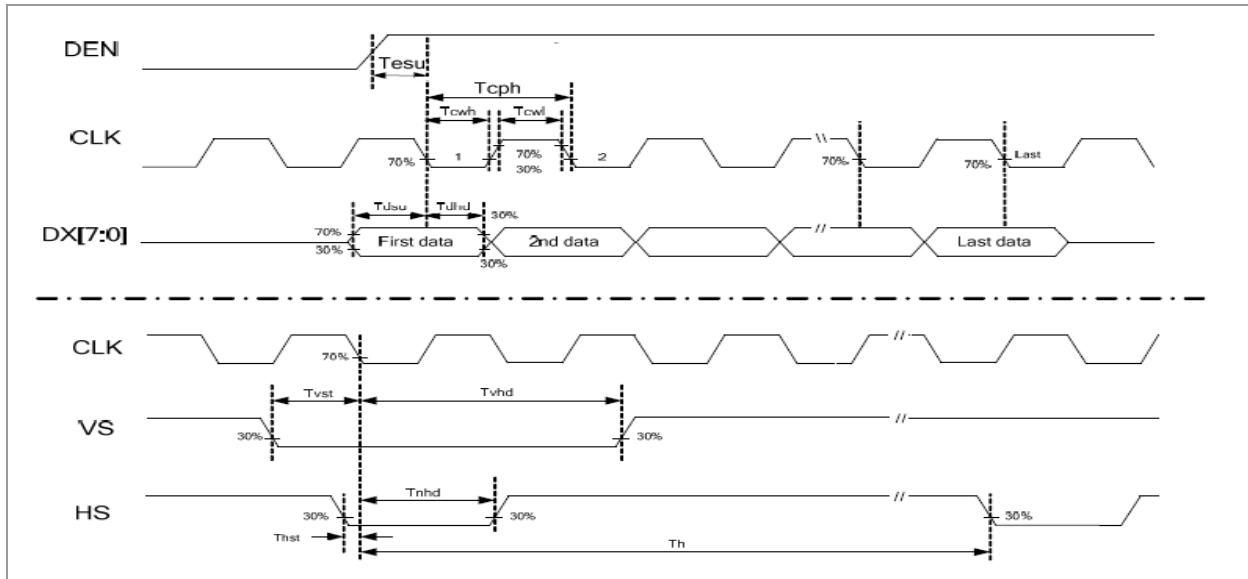

### 3.3.3 Parallel RGB SYNC Mode Horizontal Data Format

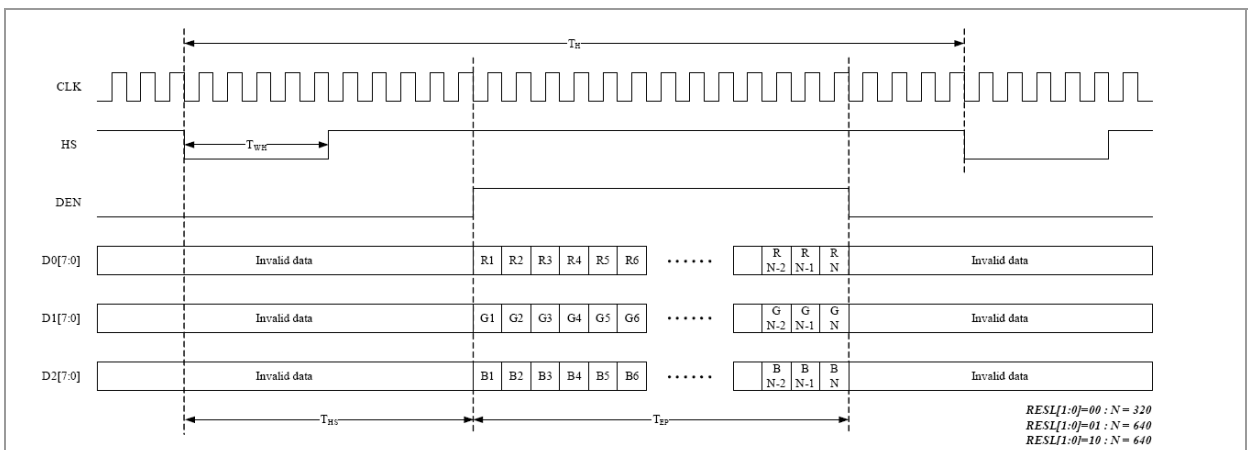

### 3.3.4 Parallel RGB DEN Mode Horizontal Data Format.

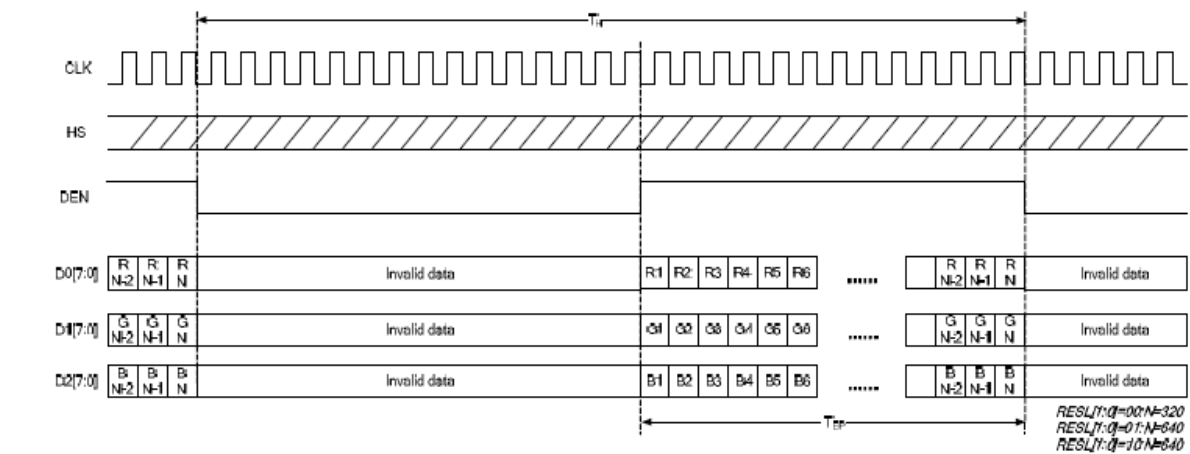


## Product Specification

|                                                                                   |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 10 / 25 |

### 3.3.5 LVDS Timing Condition

|            |                                   |            |        |            |    |
|------------|-----------------------------------|------------|--------|------------|----|
| $t_{RCP}$  | CLK OUT Period                    | 11.76      | T      | 50.0       | ns |
| $t_{RCH}$  | CLK OUT High Time                 |            | $4T/7$ |            | ns |
| $t_{RCL}$  | CLK OUT Low Time                  |            | $3T/7$ |            | ns |
| $t_{RCD}$  | RCLK+/- to CLK OUT Delay          |            | $5T/7$ |            | ns |
| $t_{RS}$   | TTL Data Setup to CLK OUT         | $3T/7-2.5$ |        |            | ns |
| $t_{RH}$   | TTL Data Hold from CLK OUT        | $4T/7-3.5$ |        |            | ns |
| $t_{TLH}$  | TTL Low to High Transition Time   |            | 3.0    | 5.0        | ns |
| $t_{THL}$  | TTL High to Low Transition Time   |            | 3.0    | 5.0        | ns |
| $t_{RIP1}$ | Input Data Position 0 (T=11.76ns) | -0.4       | 0.0    | 0.4        | ns |
| $t_{RIP0}$ | Input Data Position 1 (T=11.76ns) | $T/7-0.4$  | $T/7$  | $T/7+0.4$  | ns |
| $t_{RIP6}$ | Input Data Position 2 (T=11.76ns) | $2T/7-0.4$ | $2T/7$ | $2T/7+0.4$ | ns |
| $t_{RIP5}$ | Input Data Position 3 (T=11.76ns) | $3T/7-0.4$ | $3T/7$ | $3T/7+0.4$ | ns |
| $t_{RIP4}$ | Input Data Position 4 (T=11.76ns) | $4T/7-0.4$ | $4T/7$ | $4T/7+0.4$ | ns |
| $t_{RIP3}$ | Input Data Position 5 (T=11.76ns) | $5T/7-0.4$ | $5T/7$ | $5T/7+0.4$ | ns |
| $t_{RIP2}$ | Input Data Position 6 (T=11.76ns) | $6T/7-0.4$ | $6T/7$ | $6T/7+0.4$ | ns |
| $t_{RPLL}$ | Phase Lock Loop Set               |            |        | 10.0       | ms |

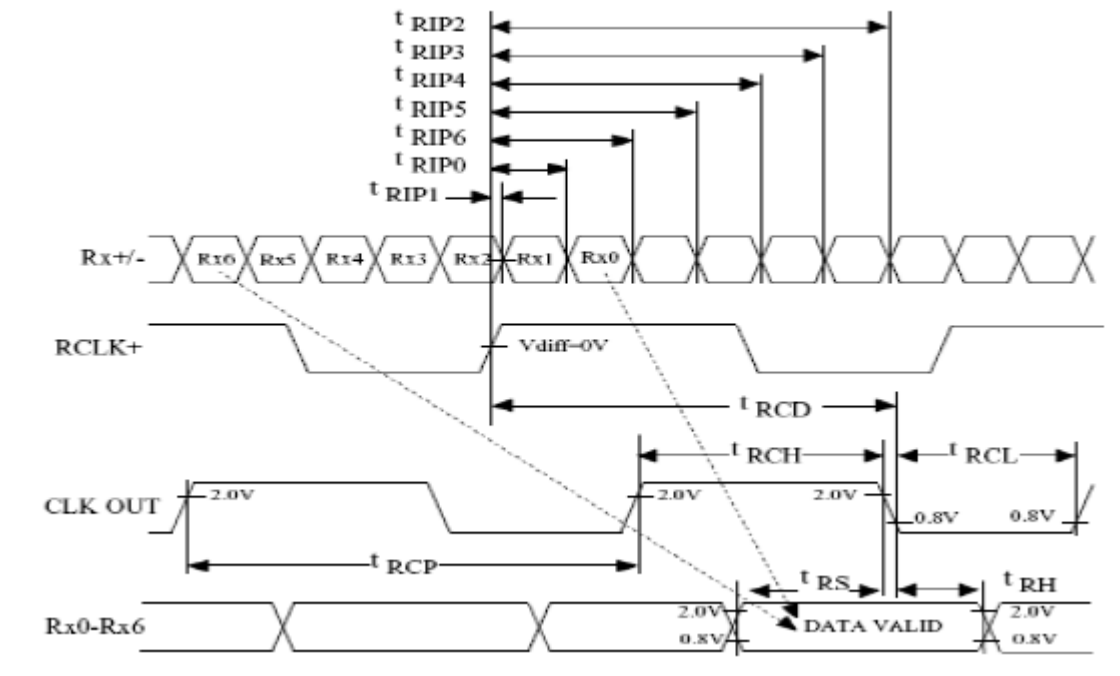

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 11 / 25 |

### 3.3.6 LVDS Data Mapping

|      | TA0 | TA1 | TA2 | TA3 | TA4 | TA5 | TA6 | TB0 | TB1 | TB2 | TB3 | TB4 | TB5 | TB6 | TC0 | TC1 | TC2 | TC3 | TC4 | TC5 | TC6 |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 6BIT | R0  | R1  | R2  | R3  | R4  | R5  | G0  | G1  | G2  | G3  | G4  | G5  | B0  | B1  | B2  | B3  | B4  | B5  | HS  | VS  | DE  |

### 3.4 Back-Light Unit

The Back-light system is an edge-lighting type with 30 white LED(Light Emitting Diode)s. The characteristics of 30 white LEDs are shown in the following tables.

(Ta= Room Temp)

| Characteristics            |      | Symbol   | Min.    | Typ.   | Max.   | Unit | Note |
|----------------------------|------|----------|---------|--------|--------|------|------|
| Current of Back-light Unit |      | $I_B$    | -       | 200    | 250    | mA   | (1)  |
| Voltage of Back-light Unit |      | $V_B$    | -       | (9.6)  | (10.5) | V    |      |
| Power Consumption          |      | $P_{BL}$ | -       | (1920) | (2625) | mW   | (2)  |
| LED Life Time              | 25°C | -        | (50000) | -      | -      | hr   | (3)  |

Note (1) LEDS in 3 series x 10 parallel type.

(2) Where  $I_B = 200\text{mA}$ ,  $V_B = 9.6$ ,  $P_{BL} = V_B \times I_B$

(3) The environmental conducted under ambient air flow ,at  $T_a=25\pm 2^\circ\text{C}$ ,60%RH $\pm 5\%$

## Product Specification

|                                                                                   |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 12 / 25 |

### 4. Optical Characteristics

#### 4.1 Optical characteristic of the LCD


The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state.

Measuring equipment: BM-5A, BM-7

| Item                          |       | Symbol         | Condition                  | Min   | Typ   | Max   | Unit              | Note |
|-------------------------------|-------|----------------|----------------------------|-------|-------|-------|-------------------|------|
| Brightness                    |       |                |                            | 560   | (720) | --    | cd/m <sup>2</sup> |      |
| Response time                 |       | T <sub>r</sub> | θ=0°                       | -     | 15    | 20    | ms                | .    |
|                               |       | T <sub>f</sub> |                            | --    | 25    | 35    | ms                |      |
| Contrast ratio                |       | CR             | At optimized viewing angle | 400   | (500) | --    | --                |      |
| Color Gamut                   |       | NTSC %         | --                         | --    | 50    | --    | %                 |      |
| Color Chromaticity (CIE 1931) | Red   | R <sub>x</sub> | θ=0° Normal Viewing Angle  | 0.565 | 0.615 | 0.665 | --                |      |
|                               |       | R <sub>y</sub> |                            | 0.294 | 0.344 | 0.394 |                   |      |
|                               | Green | G <sub>x</sub> |                            | 0.257 | 0.307 | 0.357 | --                |      |
|                               |       | G <sub>y</sub> |                            | 0.512 | 0.562 | 0.612 |                   |      |
|                               | Blue  | B <sub>x</sub> |                            | 0.090 | 0.140 | 0.190 | --                |      |
|                               |       | B <sub>y</sub> |                            | 0.080 | 0.130 | 0.180 |                   |      |
|                               | White | W <sub>x</sub> |                            | 0.259 | 0.309 | 0.359 | --                |      |
|                               |       | W <sub>y</sub> |                            | 0.300 | 0.350 | 0.400 |                   |      |
| Viewing Angle (6H)            | Hor.  | θ <sub>R</sub> | CR≥10                      | 55    | 65    | --    | Degree            |      |
|                               |       | θ <sub>L</sub> |                            | 55    | 65    | --    |                   |      |
|                               | Ver.  | φ <sub>H</sub> |                            | 40    | 50    | --    |                   |      |
|                               |       | φ <sub>L</sub> |                            | 55    | 65    | --    |                   |      |

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 13 / 25 |


- a. Test equipment setup
- After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.
- b. Definition of response time: Tr and Tf
- The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

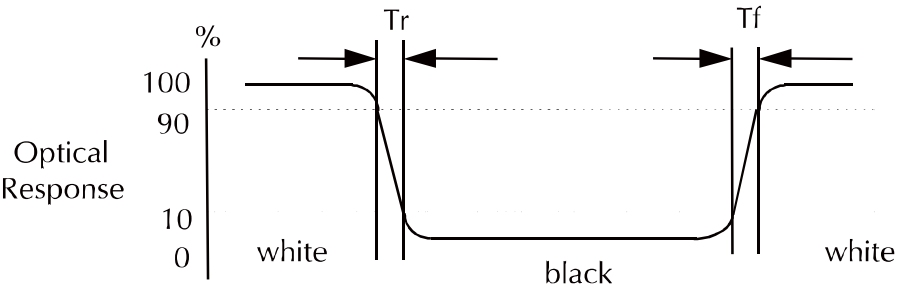

- c. Definition of contrast ratio:
- $$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$
- d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 14 / 25 |

e. View Angle

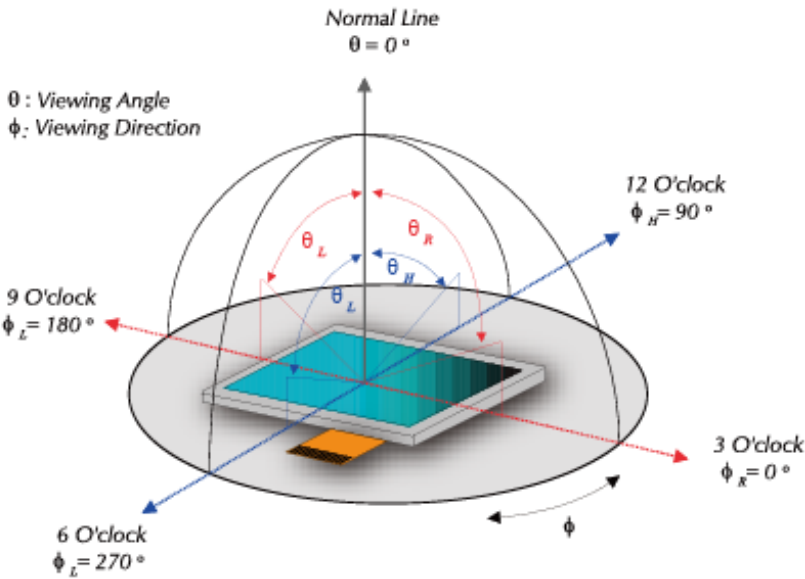

f. Definition of Luminance of White: Luminance of white at the center points

|                                 |          |
|---------------------------------|----------|
| Light Source of Back-Light Unit | LED Type |
|---------------------------------|----------|


g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}}$$

h. The definition of Color Gamut -Color Chromaticity CIE 1931

Color coordinate of white & red, green, blue at center point.

Color Gamut : NTSC(%) = ( RGB Triangle Area / NTSC Triangle Area ) x 100

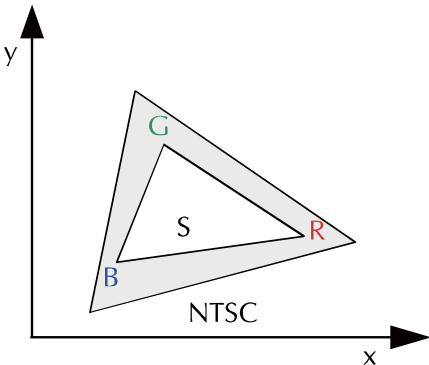


| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 15 / 25 |

5. I/O Terminal

5.1 Pin Assignment

| Pin No. | Symbol | I/O | Function                                           | Remark |
|---------|--------|-----|----------------------------------------------------|--------|
| 1       | VCC    | P   | Power Supply 3.3V                                  |        |
| 2       | VCC    | P   | Power Supply 3.3V                                  |        |
| 3       | VSS    | P   | Ground                                             |        |
| 4       | VSS    | P   | Ground                                             |        |
| 5       | RXIN0- | I   | LVDS Data Differential Pair 0 input                |        |
| 6       | RXIN0+ | I   | LVDS Data Differential Pair 0 input                |        |
| 7       | VSS    | P   | Ground                                             |        |
| 8       | RXIN1- | I   | LVDS Data Differential Pair 1 input                |        |
| 9       | RXIN1+ | I   | LVDS Data Differential Pair 1 input                |        |
| 10      | VSS    | P   | Ground                                             |        |
| 11      | RXIN2- | I   | LVDS Data Differential Pair 2 input                |        |
| 12      | RXIN2+ | I   | LVDS Data Differential Pair 2 input                |        |
| 13      | VSS    | P   | Ground                                             |        |
| 14      | RXCLK- | I   | LVDS Clock Differential input                      |        |
| 15      | RXCLK+ | I   | LVDS Clock Differential input                      |        |
| 16      | VSS    | P   | Ground                                             |        |
| 17      | NC     | -   | NC                                                 |        |
| 18      | NC     | -   | NC                                                 |        |
| 19      | REV    | I   | Select horizontal and vertical scanning direction. | Note 1 |
| 20      | VSS    | P   | Ground                                             |        |

Note1

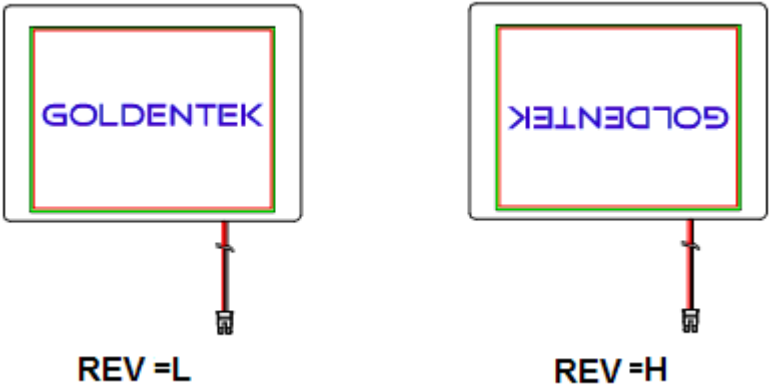

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 16 / 25 |

## 5.2 Back-light Unit (BLU)


| Pin No. | Symbol | Function                       | Remark |
|---------|--------|--------------------------------|--------|
| 1       | LEDA   | Power Supply for LED backlight | Red    |
| 2       | LEDK   | GND for LED backlight          | Black  |

Connector: JST BHSR-02VS-1



| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 17 / 25 |

5.3 Block Diagram

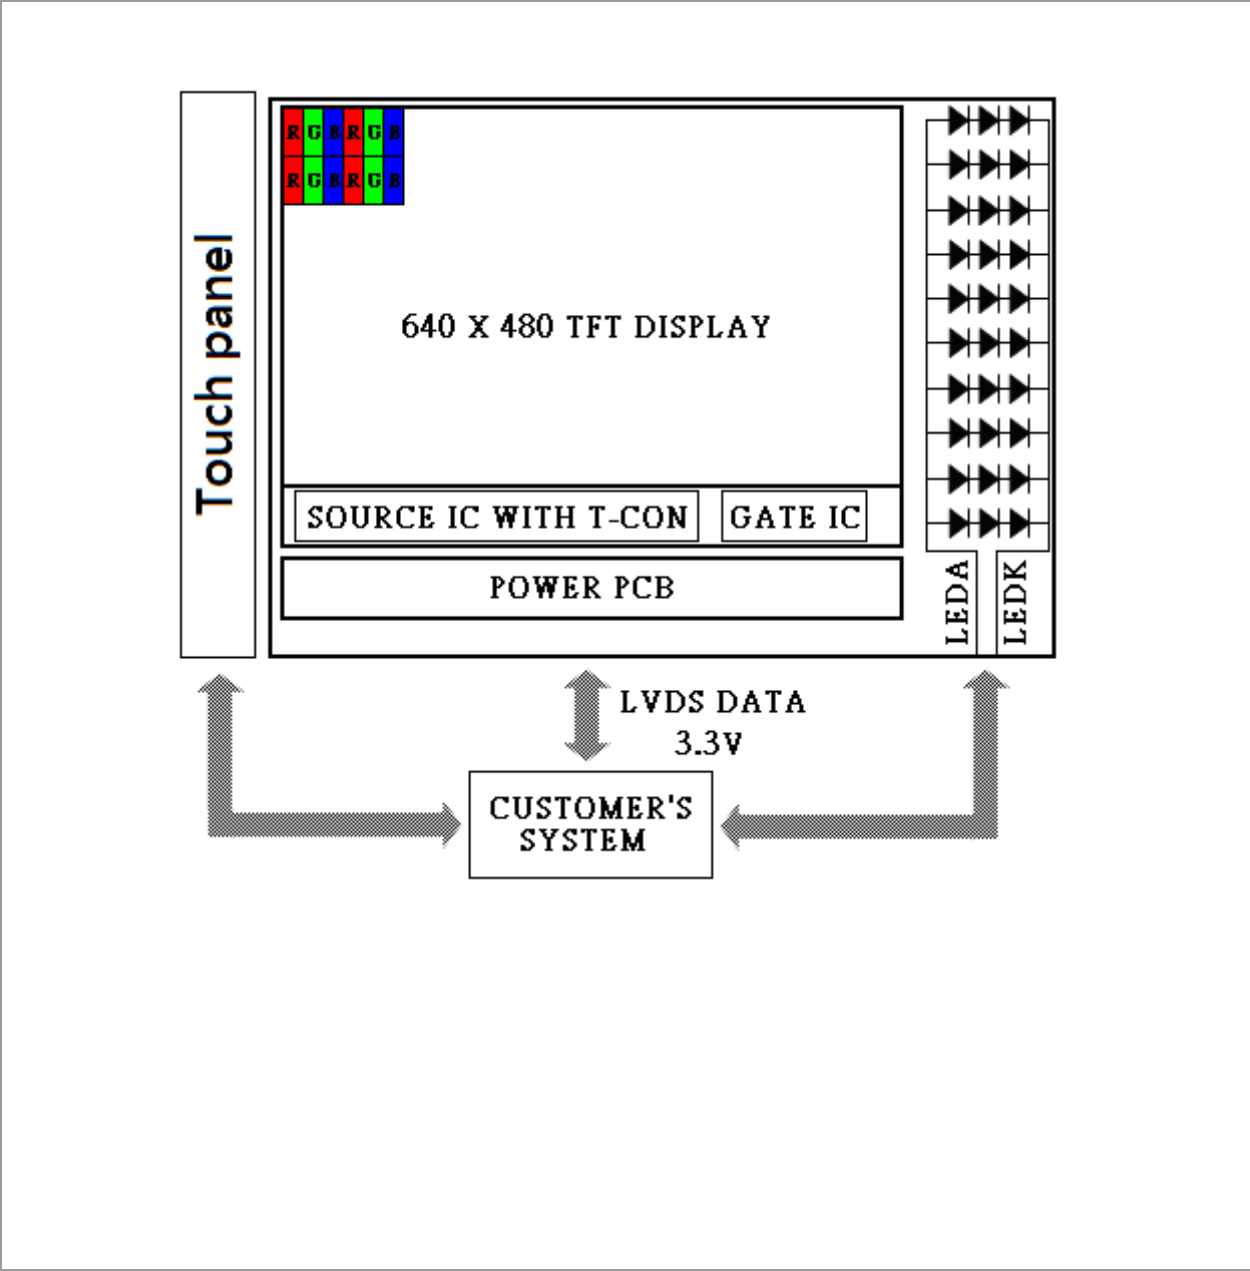

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 18 / 25 |

#### 5.4 Basic Display Color and Gray Scale

|             | Color & Gray Scale                                                                            | Data Signal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|-----------------------------------------------------------------------------------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|             |                                                                                               | R5          | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Color |  Black       | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Red(0)      | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Green(0)    | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Blue(0)     | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|             |  Cyan        | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
|             |  Magenta     | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|             |  Yellow      | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  White       | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| Red         |  Black       | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Red(1)      | 0           | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Red(2)      | 0           | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  :           | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Red(31)     | 0           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  :           | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Red(62)     | 1           | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Red(63)    | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Green       |  Black      | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Green(1)  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Green(2)  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  :         | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Green(31) | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  :         | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Green(62) | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Green(63) | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Blue        |  Black     | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|             |  Blue(1)   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  |
|             |  Blue(2)   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  |
|             |  :         | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Blue(31)  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |
|             |  :         | :           | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  | :  |
|             |  Blue(62)  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  |
|             |  Blue(63)  | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |

0 : Low level voltage, 1 :High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. With the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 19 / 25 |

## 6. Touch screen panel

### 6.1 Electrical Characteristics

| Item                  | Min. | Typ. | Max. | Unit       | Note                      |
|-----------------------|------|------|------|------------|---------------------------|
| Linearity             | -    | -    | 1.5  | %          | Analog X and Y directions |
| Terminal resistance   | 200  | -    | 900  | $\Omega$   | X                         |
|                       | 200  | -    | 900  | $\Omega$   | Y                         |
| Insulation resistance | 20   | -    | -    | M $\Omega$ | DC 25V                    |
| Voltage               | -    | 5.0  | 10   | V          | DC                        |
| Chattering            | -    | -    | 10   | ms         | 100k $\Omega$ pull-up     |
| Transparency          | -    | 80   | -    | %          | Glare & hard coating      |

### 6.2 Mechanical & Reliability Characteristics

| Item                   | Min.      | Typ. | Max. | Unit  | Note                     |
|------------------------|-----------|------|------|-------|--------------------------|
| Operation force        | -         | 60   | 100  | g     |                          |
| Tapping durability     | 1,000,000 | -    | -    | times |                          |
| Pen sliding durability | 100,000   |      |      |       |                          |
| Surface hardness       | 3         | -    | -    | H     | According to (JIS-K5400) |

### 6.3 Touch Panel Unit

| Pin No. | Symbol | Function           | Remark |
|---------|--------|--------------------|--------|
| 1       | YU     | Touch panel Top    |        |
| 2       | XR     | Touch panel Right  |        |
| 3       | YD     | Touch panel Bottom |        |
| 4       | XL     | Touch panel Left   |        |

## Product Specification

|                                                                                   |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 20 / 25 |


### 7. Reliability Condition

No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature:  $20 \pm 5^{\circ}\text{C}$ . Humidity:  $65 \pm 5\% \text{RH}$ .

Tests will be not conducted under functioning state.
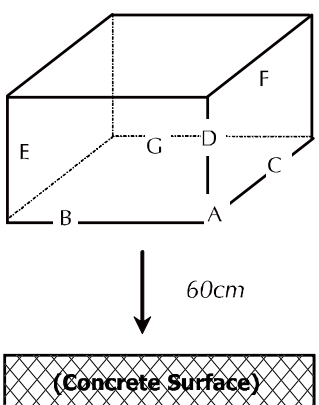
| No. | Parameter                                         | Condition                                                                                                                                                                                                                                                                                                                                                      | Notes |
|-----|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| 1   | High Temperature Operating                        | $80^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 240hrs (Operation state).                                                                                                                                                                                                                                                                                         | -     |
| 2   | Low Temperature Operating                         | $-30^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 240hrs (Operation state).                                                                                                                                                                                                                                                                                        | -     |
| 3   | High Temperature Storage                          | $80^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 240hrs.                                                                                                                                                                                                                                                                                                           | -     |
| 4   | Low Temperature Storage                           | $-30^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 240hrs.                                                                                                                                                                                                                                                                                                          | -     |
| 5   | High Temperature and High Humidity Operation Test | $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , 90%, 240hrs.                                                                                                                                                                                                                                                                                                      | -     |
| 6   | Vibration Test                                    | Total fixed amplitude: 1.5mm.<br>Vibration Frequency: 10~55Hz.<br>One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes.                                                                                                                                                                                                                              | -     |
| 7.  | Drop Test                                         | <p>To be measured after dropping from 60cm high on the concrete surface in packing state.</p>  <p><i>Dropping method corner dropping:</i></p> <p><i>A corner: Once edge dropping.</i></p> <p><i>B, C, D edge: Once face dropping.</i></p> <p><i>E, F, G face: Once.</i></p> | -     |

- Notes:
1. No dew condensation to be observed.
  2. The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.
  3. Vibration test will be conducted to the product itself without putting I in a container.

**SGD®**  
DISPLAY THE WORLD

21 / 25

[illegible]


| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 22 / 25 |

## 9. Incoming Inspection Standards

### 9.1 Inspection and Environment Conditions

#### 9.1.1 Inspection Conditions:

- (1) Inspection Distance: 35 cm $\pm$ 5cm  
(2) View Angle : Light-on Inspection Angle :  $\pm 5^\circ$   
Cosmetic Inspection Angle :  $\pm 45^\circ$

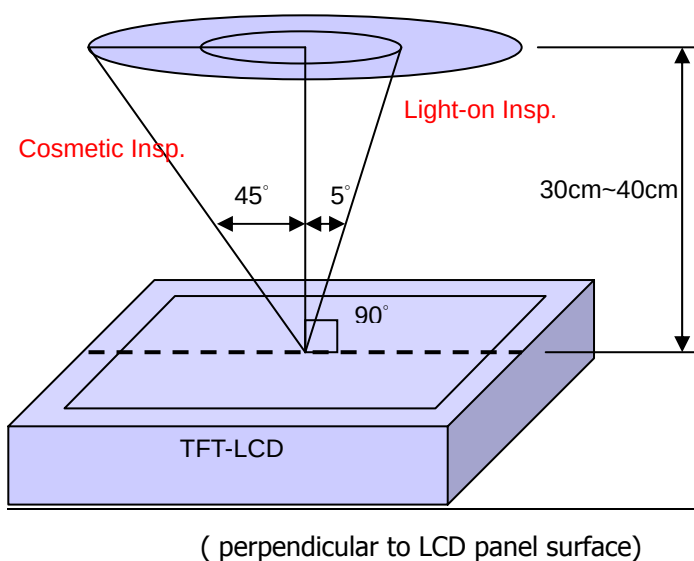

#### 9.1.2 Environment Conditions:

|                      |                       |                   |
|----------------------|-----------------------|-------------------|
| Ambient Temperature  |                       | 23°C $\pm$ 5°C    |
| Ambient Humidity     |                       | 55 $\pm$ 10%RH    |
| Ambient Illumination | Cosmetic Inspection   | more than 600 Lux |
|                      | Functional Inspection | 300~500 Lux       |

#### 9.1.3 Sampling Conditions:

- (1) Lot Size: Quantity of shipment lot per model  
(2) Sampling Method:



|               |              |                                    |
|---------------|--------------|------------------------------------|
| Sampling Plan |              | MIL-STD-105E                       |
|               |              | Normal Inspection, Single Sampling |
|               |              | Level II                           |
| AQL           | Major Defect | 1.0%                               |
|               | Minor Defect | 1.5%                               |

(3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 23 / 25 |

#### 9.1.4 Inspection Criteria

##### 9.1.4.1 Cosmetic Inspection(Panel):
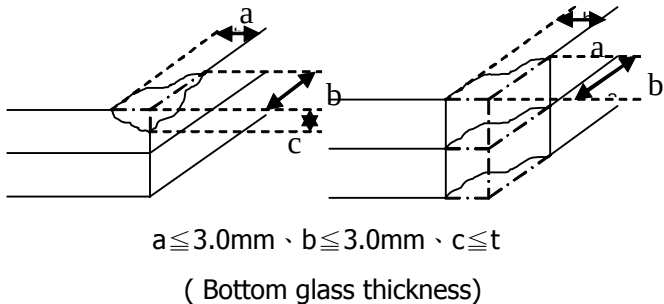
| Item                                  | Judgment Criteria                                                                                                                                                                                                                    | Classification |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Chipping on Panel                     |  <p> <math>a \leq 3.0\text{mm}</math>、<math>b \leq 3.0\text{mm}</math>、<math>c \leq t</math><br/>           ( Bottom glass thickness)         </p> | MA             |
| Scratch on Panel<br>*Note-2           | $W \leq 0.05\text{mm}$ or $L < 5\text{mm}$ : Ignored<br>$0.05\text{mm} < W \leq 0.1\text{mm}$ and $L \leq 5\text{mm}$ : $N \leq 5$<br>$W > 0.1\text{mm}$ or $L > 5\text{mm}$ : Not allowed                                           | MI             |
| Bubble or Dent on Panel<br>*Note-3    | $D \leq 0.2\text{mm}$ : Ignored<br>$0.2\text{mm} < D \leq 0.3\text{mm}$ : $N \leq 5$<br>$D > 0.3\text{mm}$ : Not allowed                                                                                                             | MI             |
| Panel Crack                           |  <p>Not Allowed crack</p>                                                                                                                         | MA             |
| Bezel Deformation                     | Obvious deformation is not allowed.                                                                                                                                                                                                  | MI             |
| Bezel Oxidation                       | Not allowed if it rusts continuously over 1 cm (It is out of warranty with rusted tin plate)                                                                                                                                         | MI             |
| Bezel Scratch                         | $L \leq 20\text{mm}$ , $W \leq 0.2$ , $N \leq 3$                                                                                                                                                                                     | MI             |
| Metal Squash Dent /Flange(Front Side) | $D(W) \leq 1, L \leq 3, N \leq 3$ ;                                                                                                                                                                                                  | MI             |
| B/L High Voltage Wire Denudation      | Not allowed                                                                                                                                                                                                                          | MA             |
| Polarizer flaw or leak out resin      | Defect is defined as the active area.                                                                                                                                                                                                | MI             |
| Outline Dimension                     | Must in Spec, refer to related product spec.                                                                                                                                                                                         | MI             |

| Product Specification                                                             |                      |          |              |         |
|-----------------------------------------------------------------------------------|----------------------|----------|--------------|---------|
|  | Model: GVTV57TPAD2R0 | Rev. No. | Issued Date. | Page.   |
|                                                                                   |                      | B        | 2015,JUN,23  | 24 / 25 |

#### 9.1.4.2 Functional Inspection:

| Item                                                | Judgment Criteria                                                                                                                                                                                                                                            |                                        |                     | Classification |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|---------------------|----------------|
|                                                     | Area(Note1)                                                                                                                                                                                                                                                  |                                        | I                   | O              |
| Point Defect                                        | Bright dot                                                                                                                                                                                                                                                   | Random                                 | 2                   |                |
|                                                     |                                                                                                                                                                                                                                                              | 2 dots adjacent                        | 0                   | 0              |
|                                                     |                                                                                                                                                                                                                                                              | 3 dots adjacent or more                | 0                   | 0              |
|                                                     | Dark dot                                                                                                                                                                                                                                                     | Random                                 | 3                   |                |
|                                                     |                                                                                                                                                                                                                                                              | 2 dots adjacent                        | 0                   |                |
|                                                     |                                                                                                                                                                                                                                                              | 3 dots adjacent or more                | 0                   | 0              |
|                                                     | Total Dot Defect                                                                                                                                                                                                                                             |                                        | 5                   |                |
|                                                     | Distance                                                                                                                                                                                                                                                     | Distance between Bright and Bright dot | $L \geq 5\text{mm}$ |                |
|                                                     |                                                                                                                                                                                                                                                              | Distance between Bright and Dark dot   | $L \geq 5\text{mm}$ |                |
|                                                     |                                                                                                                                                                                                                                                              | Distance between Dark dot              | $L \geq 5\text{mm}$ |                |
|                                                     | (1) It is defined as Point Defect if defect area $> 0.5\text{dot}$<br>(2) It is ignored if defect area $\leq 0.5\text{dot}$<br>(3) Weak point defect will be defined as Bright Dot if it can be observed through ND filter 5%( Full Screen Black Inspection) |                                        |                     | MI             |
| Line Defect                                         | Obvious vertical or horizontal line defect is not allowed.                                                                                                                                                                                                   |                                        |                     | MA             |
| Mura                                                | Not allowed if it can be observed through ND Filter 5 %                                                                                                                                                                                                      |                                        |                     | MI             |
| Foreign Material in spot shape<br>*Note-3           | $D \leq 0.2\text{mm}$ : Ignored<br>$0.2\text{mm} < D \leq 0.5\text{mm}$ : $N \leq 8$<br>$D > 0.5\text{mm}$ : Not allowed                                                                                                                                     |                                        |                     | MI             |
| Foreign Material in line or spiral shape<br>*Note-4 | $W \leq 0.05\text{mm}$ or $L \leq 5\text{mm}$ : Ignored<br>$0.05\text{mm} < W \leq 0.2\text{mm}$ and $L 1.0\text{mm} \leq 5\text{mm}$ : $N \leq 8$<br>$W > 0.2\text{mm}$ or $L > 5\text{mm}$ : Not allowed                                                   |                                        |                     | MI             |
| Display Function Abnormal                           | No Malfunction can be allowed                                                                                                                                                                                                                                |                                        |                     | MA             |



Product Specification




Model: GVTV57TPAD2R0

Rev. No.  
B


Issued Date.  
2015,JUN,23

Page.  
25 / 25


Note-1 : I/O Area Definition

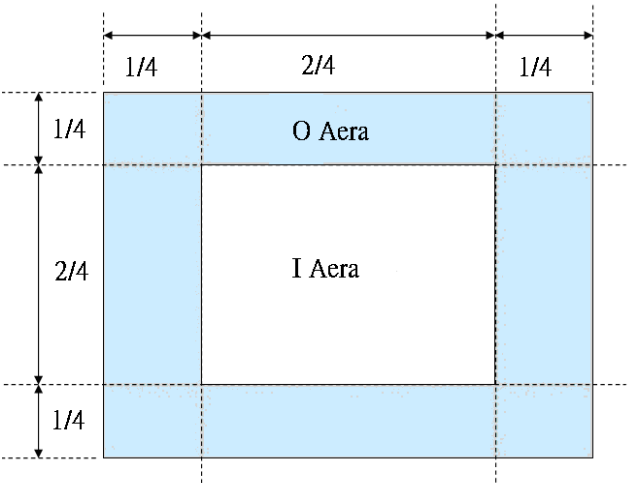

Note-2 : Polarizer Scratch

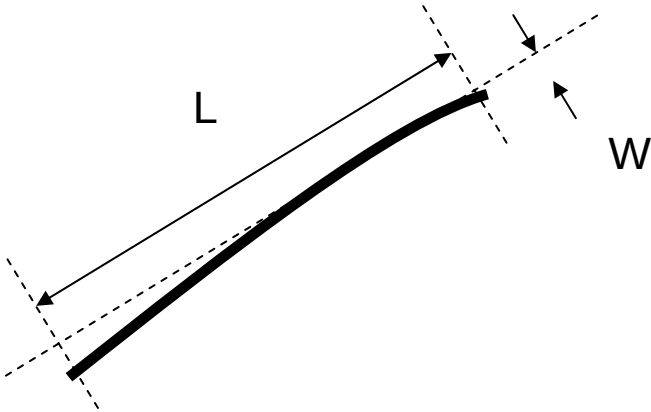

Note-3 : Spot Foreign Material  
( $W \geq L / 4$ )

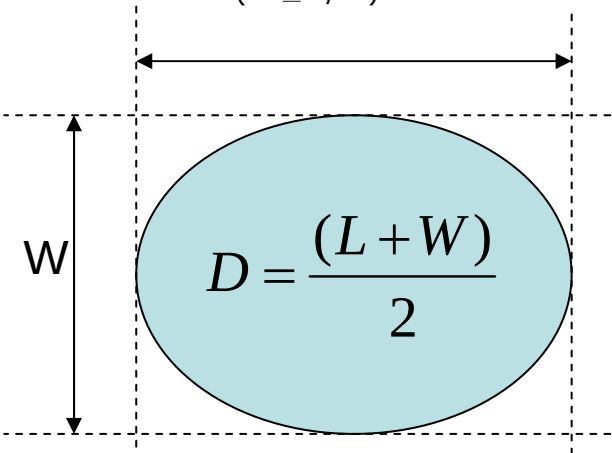

Note-4 : Line or Spiral Foreign Material  
( $W < L / 4$ )

