

PRODUCT SPECIFICATION

DATE:02/23/2001

COSMO ELECTRONICS CO., LTD.	Photocoupler : KP1110	NO. 60P00003	VER.
		SHEET 1 OF 5	4

High Reliability Photocoupler

● Features

1. Current transfer ratio
(CTR : MIN. 50% at $I_F=5\text{mA}$ $V_{ce}=5\text{V}$)
2. High isolation voltage between input and output (Viso : 5000Vrms).
3. Compact dual-in-line package.

● Applications

1. Registers, copiers, automatic vending machines.
2. System appliances, measuring instruments.
3. Computer terminals, programmable controllers.
4. Communications, telephone, etc.
5. Electric home appliances, such as oil fan heaters, Microwave oven, Washer, Refrigerator, Air conditioner, etc.
6. Medical instruments, physical and chemical equipment.
7. Signal transmission between circuits of different potentials and impedances.
8. Facsimile equipment, Audio, Video.
9. Switching power supply, Laser beam printer.



ISSUE <i>Jack Wu</i> 02-23-01	CHECK <i>Vincent Huang</i> 02-23-01	APPROVED <i>Stan Hsu</i> 02-23-01
----------------------------------	--	--------------------------------------

PRODUCT SPECIFICATION

DATE: 02/23/2001

COSMO ELECTRONICS CO., LTD.	Photocoupler : KP1110	NO. 60P00003	VER. 4
		SHEET 2 OF 5	

1. OUTSIDE DIMENSION : UNIT (mm)

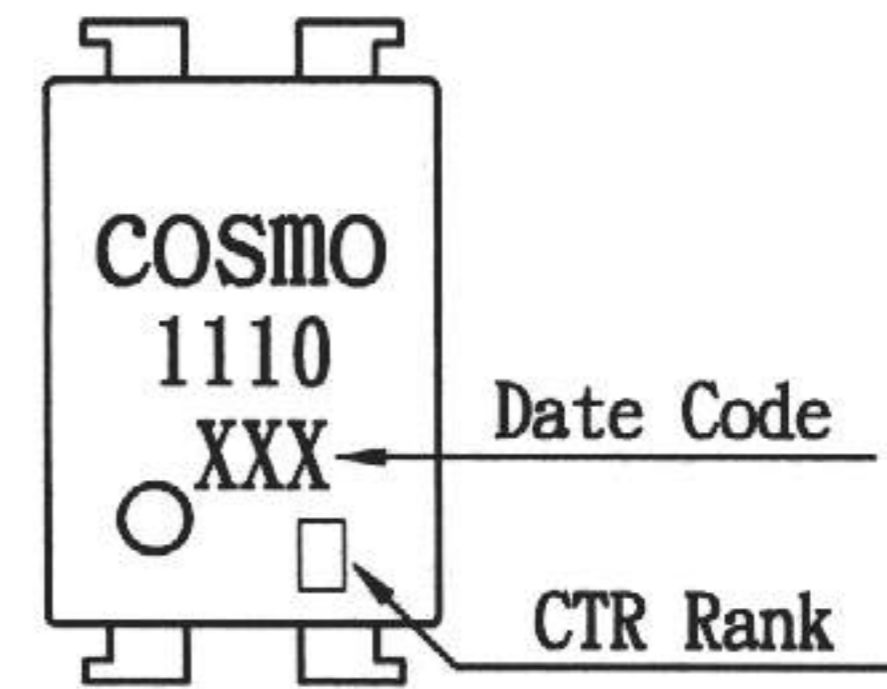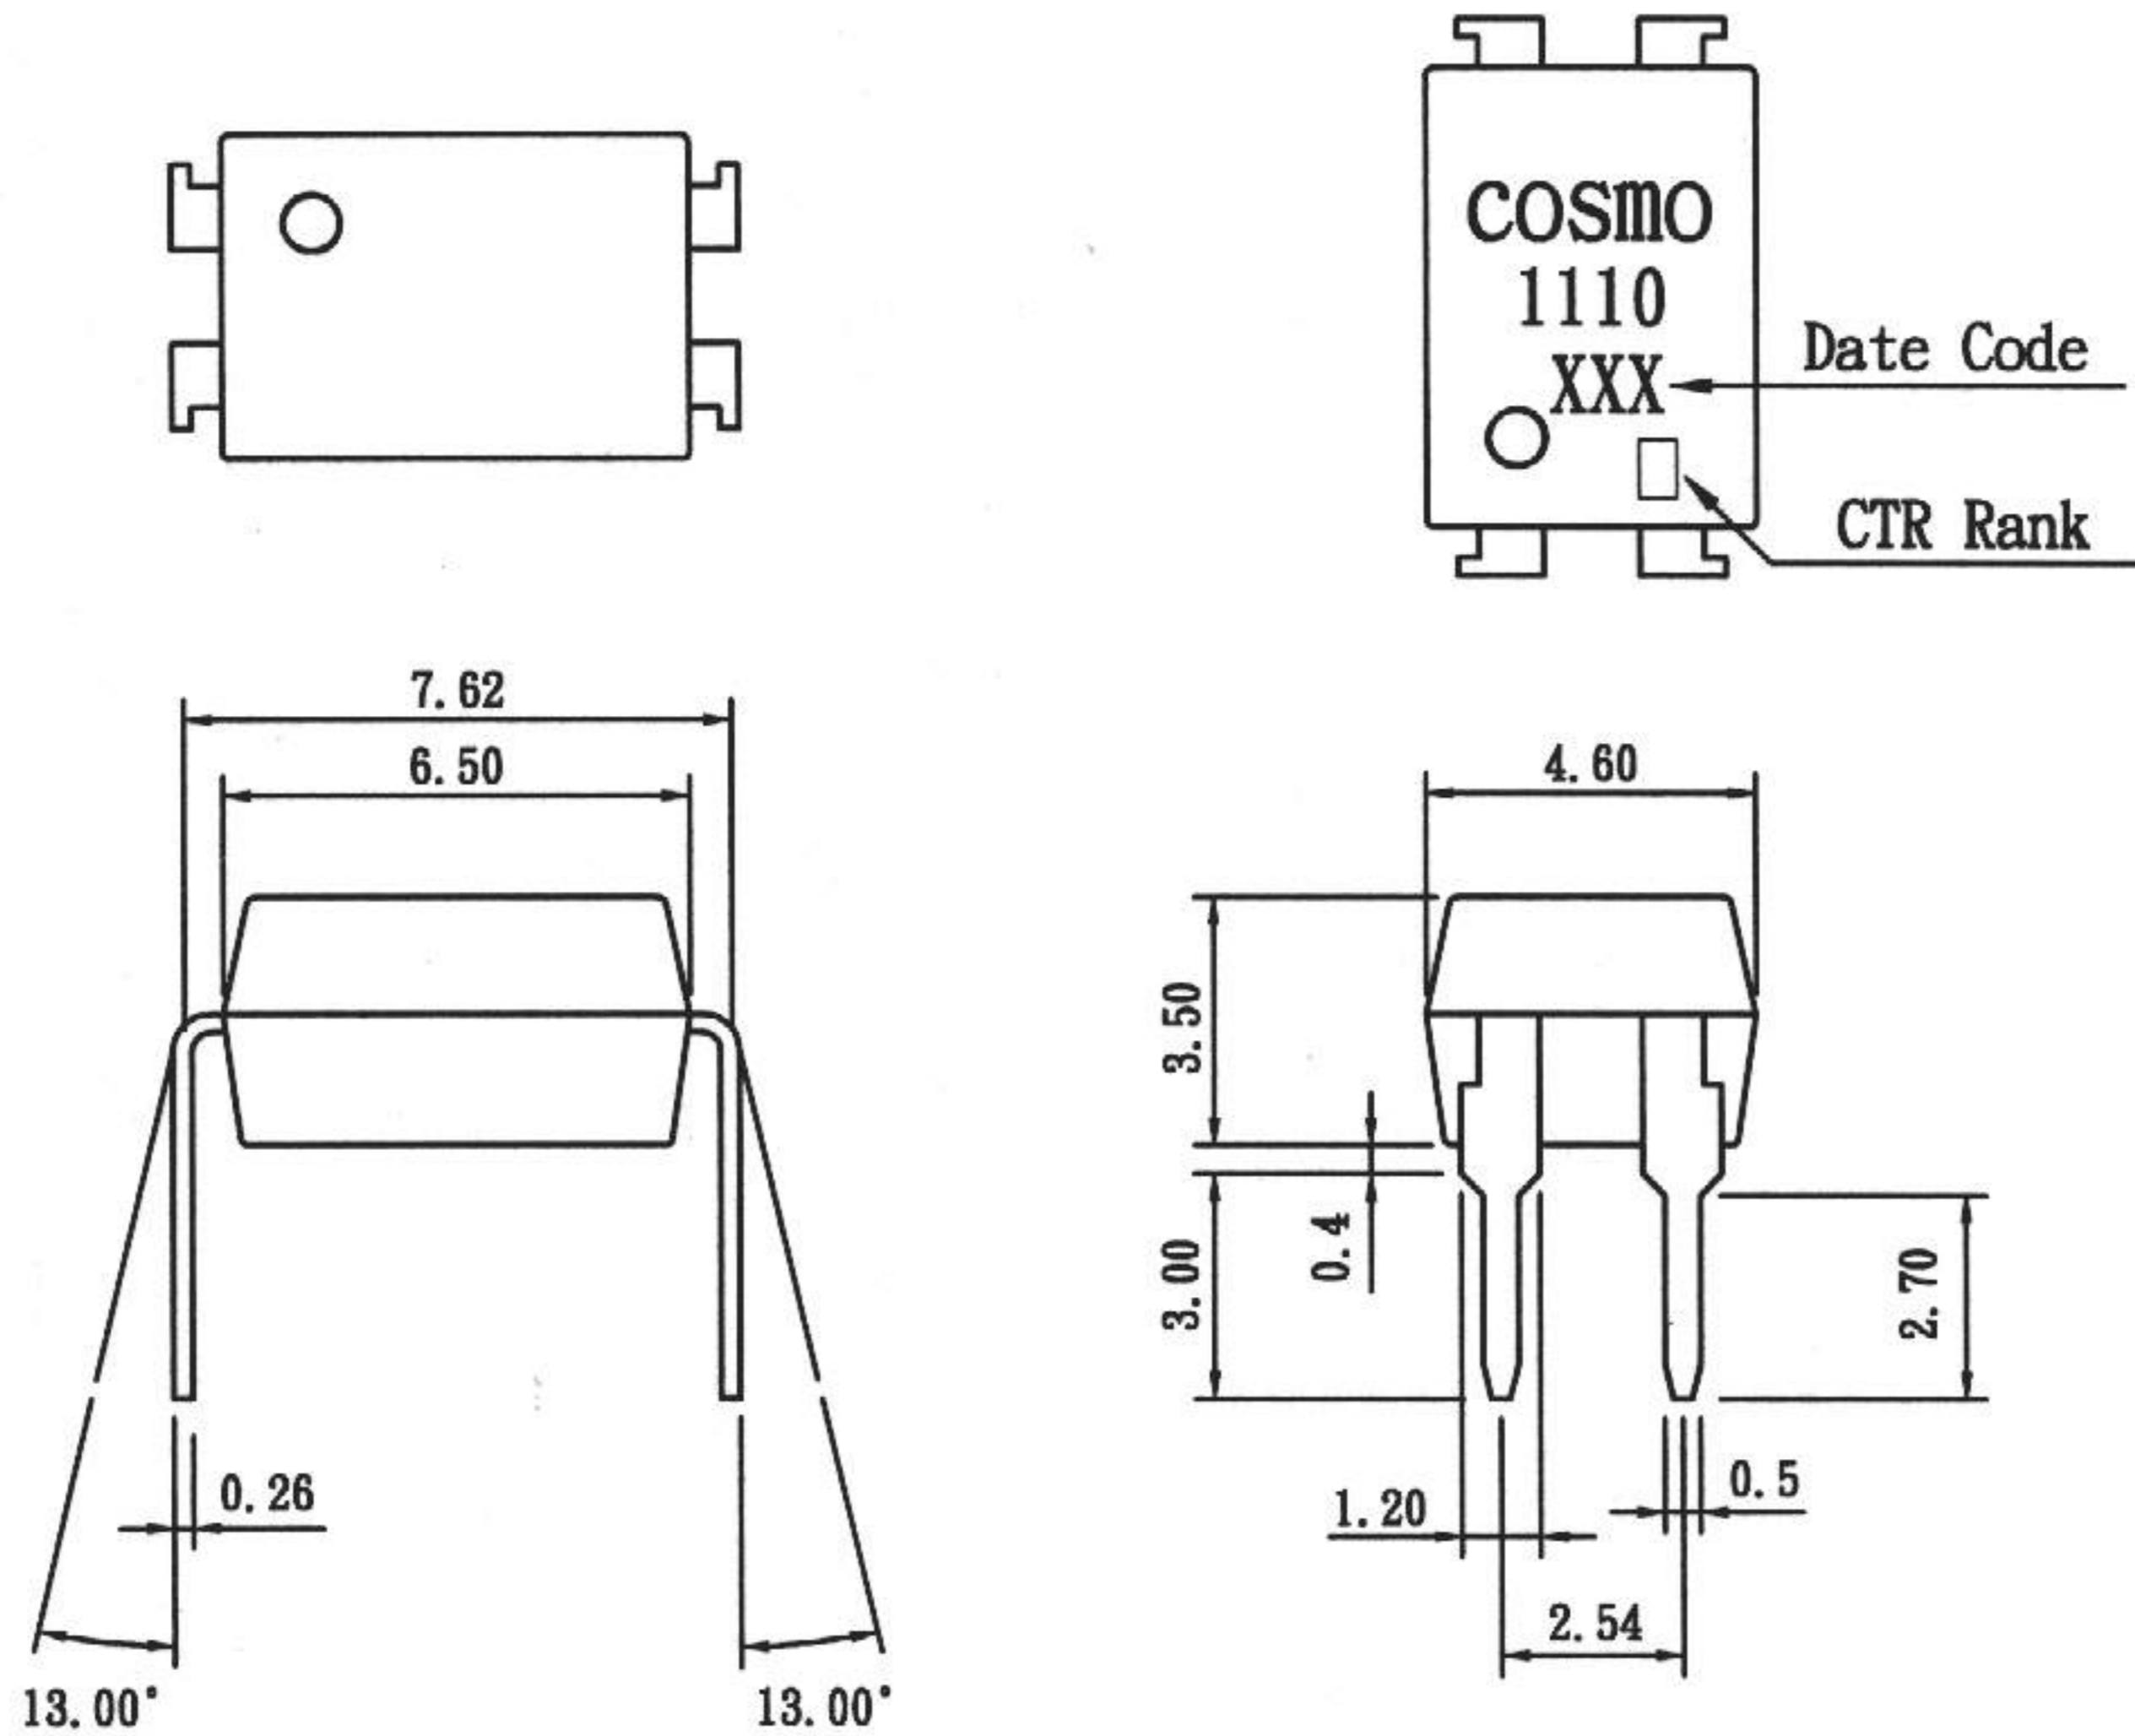

TOLERANCE : ± 0.2mm

2. SCHEMATIC : TOP VIEW



1. Anode
2. Cathode
3. Collector
4. Emitter

PRODUCT SPECIFICATION

DATE: 02/23/2001

COSMO ELECTRONICS CO., LTD.	Photocoupler : KP1110	NO. 60P00003	VER. 4
		SHEET 3 OF 5	

● Absolute Maximum Ratings

(Ta=25°C)


Parameter	Symbol	Rating	Unit
Input	Forward current	IF	50
	Peak forward current	IFM	1
	Reverse voltage	VR	6
	Power dissipation	PD	70
Output	Collector-emitter voltage	VCE0	60
	Emitter-collector voltage	VECO	6
	Collector current	Ic	50
	Collector power dissipation	Pc	150
Total power dissipation	Ptot	200	mW
Isolation voltage 1 minute	Viso	5000	Vrms
Operating temperature	Topr	-30 to +100	°C
Storage temperature	Tstg	-55 to +125	°C
Soldering temperature 10 second	Tsol	260	°C

● Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	VF	IF=20mA	-	1.2	1.4	V
	Peak forward voltage	VFM	IFM=0.5A	-	-	3.0	V
	Reverse current	IR	VR=4V	-	-	10	uA
	Terminal capacitance	Ct	V=0, f=1kHz	-	30	-	pF
Output	Collector dark current	ICBO	VCE=20V	-	-	0.1	uA
	Current transfer ratio	CTR	IF=5mA, VCE=5V	50	-	600	%
Transfer characteristics	Collector-emitter saturation voltage	VCE(sat)	IF=20mA, Ic=1mA	-	0.1	0.2	V
	Isolation resistance	Riso	DC500V	5x10 ¹⁰	10 ¹¹	-	ohm
	Floating capacitance	Cf	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency	fc	Vcc=5V, Ic=2mA, RL=100ohm	-	80	-	kHz
	Response time (Rise)	tr	Vce=2V, Ic=2mA, RL=100ohm	-	4	18	us
	Response time (Fall)	tf		-	3	18	us

Fig. 1 Current Transfer Ratio vs. Forward Current

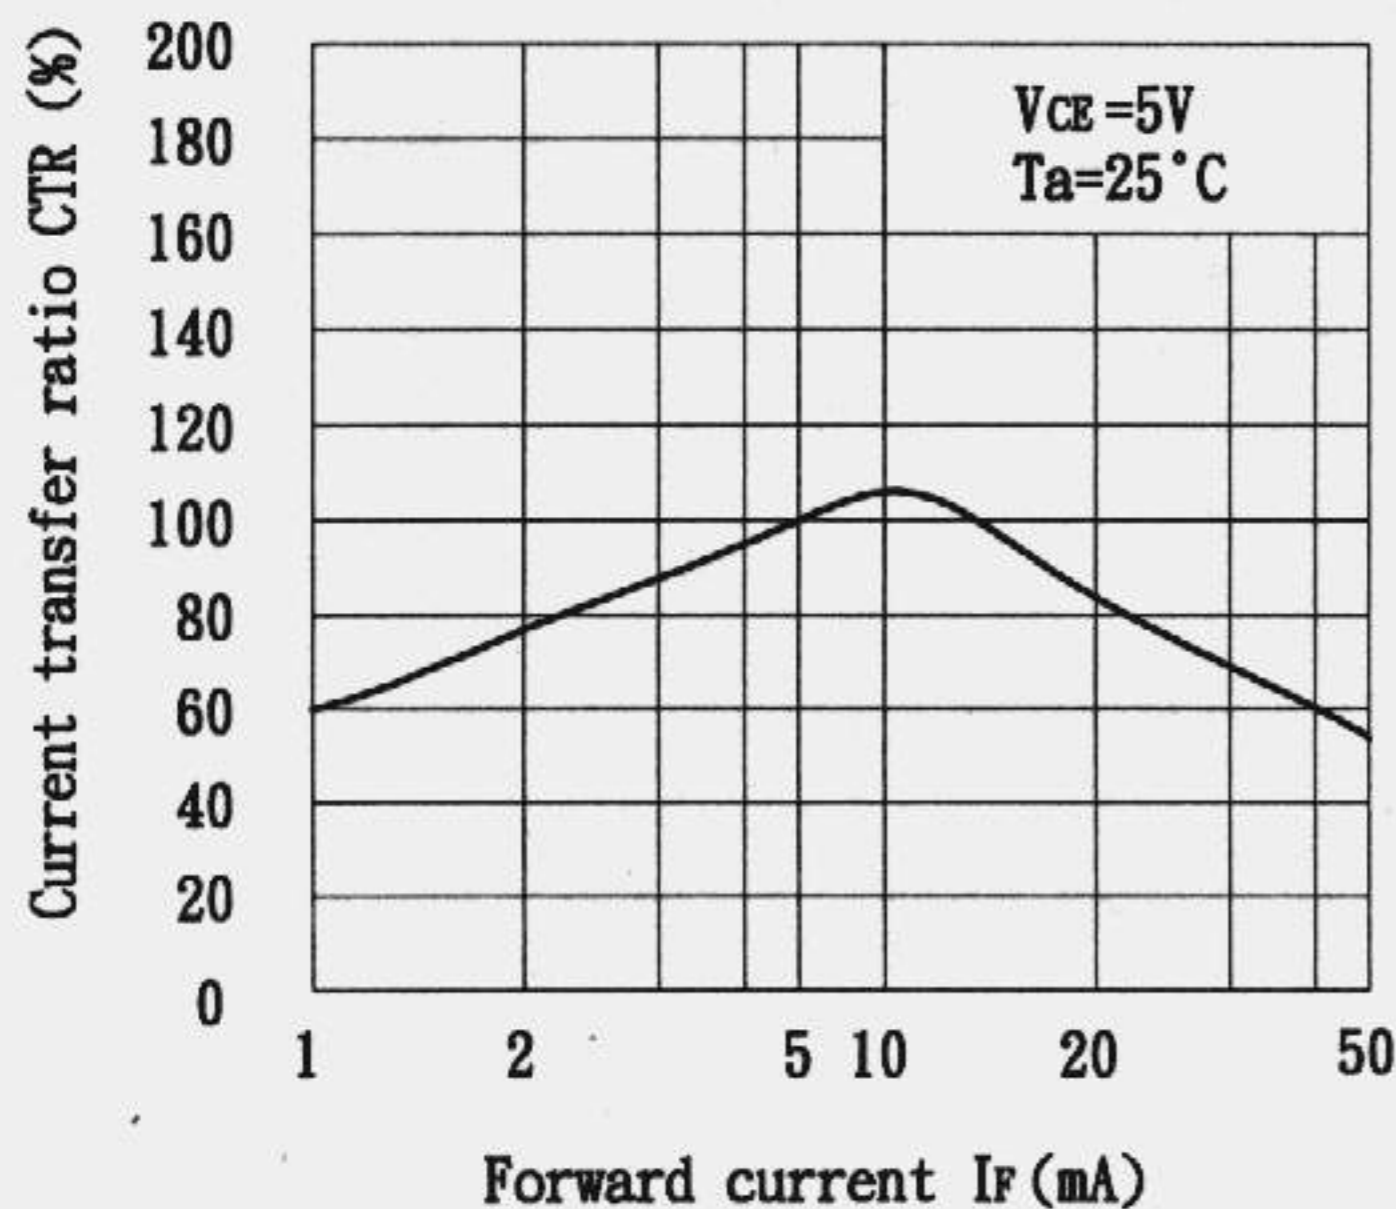

Classification table of current transfer ratio is shown below.

Model NO.	CTR (%)
KP1110 A	80 TO 160
KP1110 B	130 TO 260
KP1110 C	200 TO 400
KP1110 D	300 TO 600
KP1110 E	50 TO 600

PRODUCT SPECIFICATION

DATE:02/23/2001

COSMO ELECTRONICS CO., LTD.	Photocoupler : KP1110	NO. 60P00003	VER. 4
		SHEET 4 OF 5	

Fig. 2 Collector Power Dissipation vs. Ambient Temperature

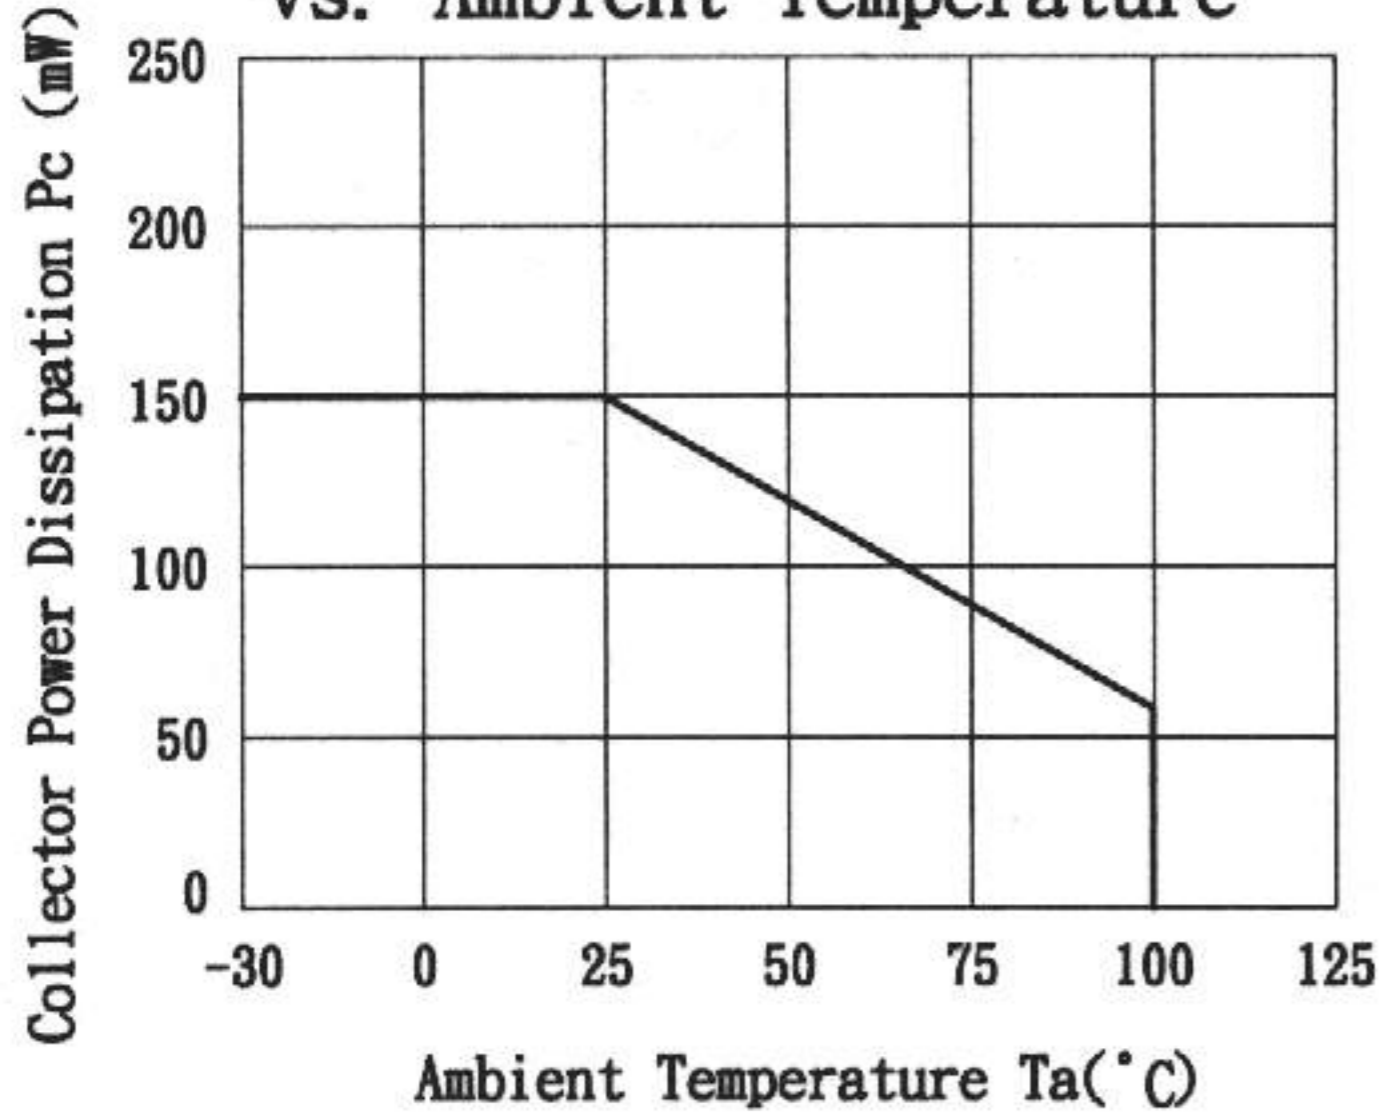


Fig. 3 Collector Dark Current vs. Ambient Temperature

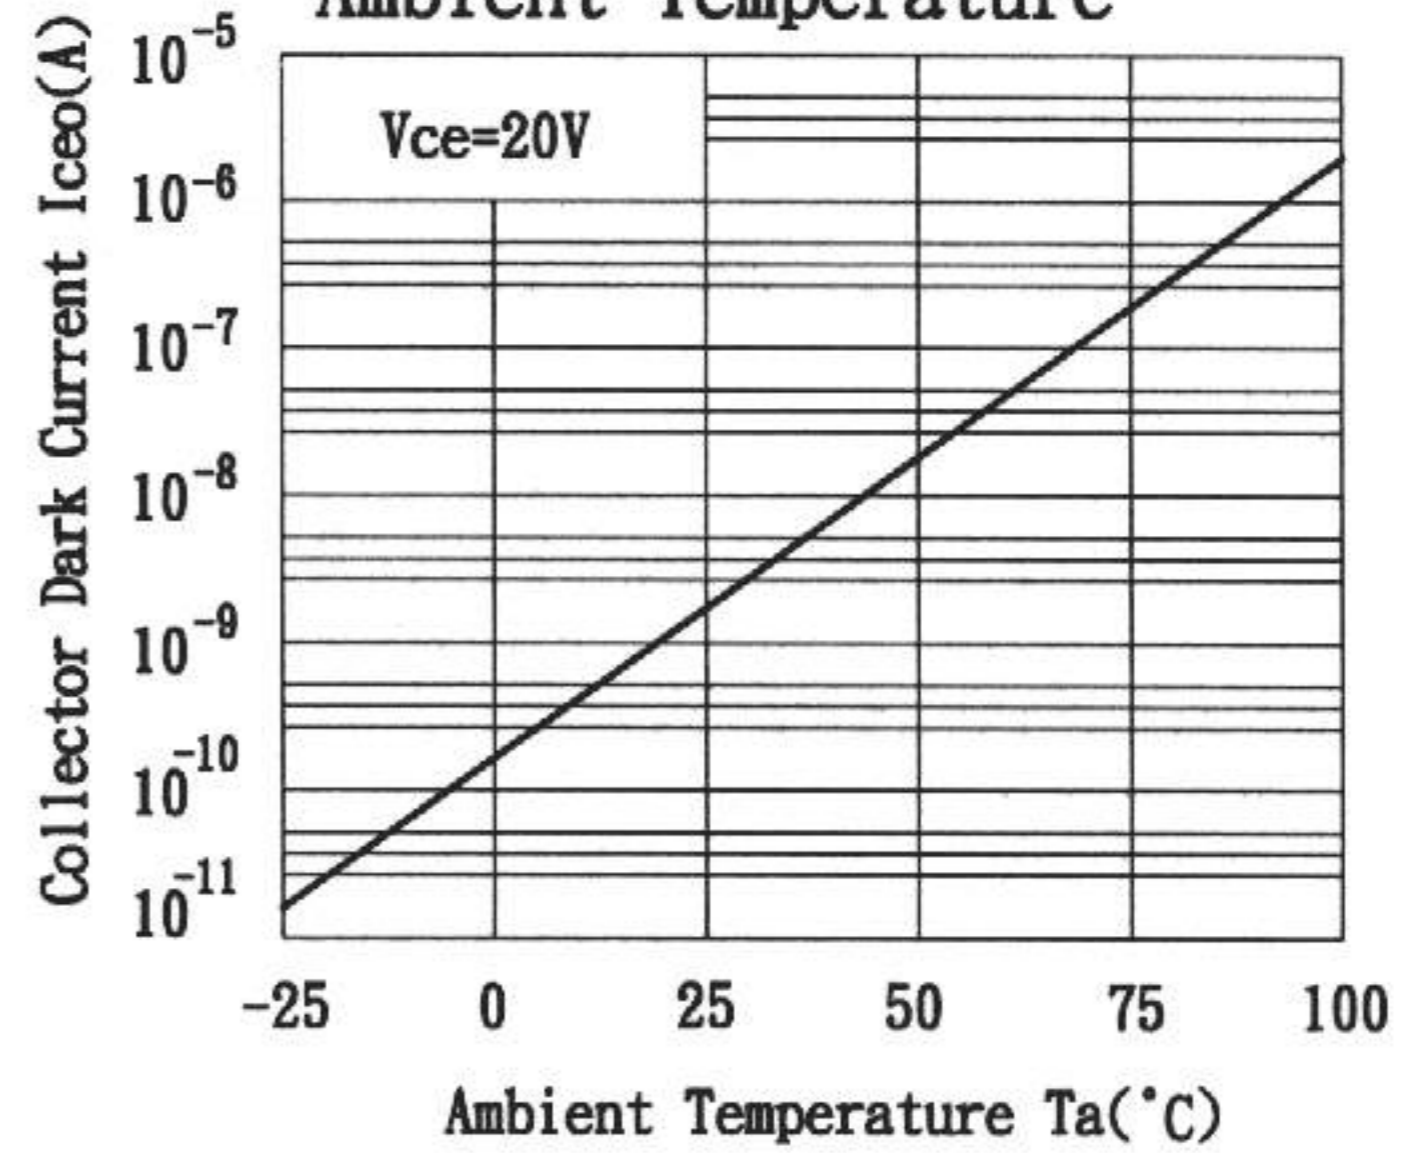


Fig. 4 Forward Current vs. Ambient Temperature

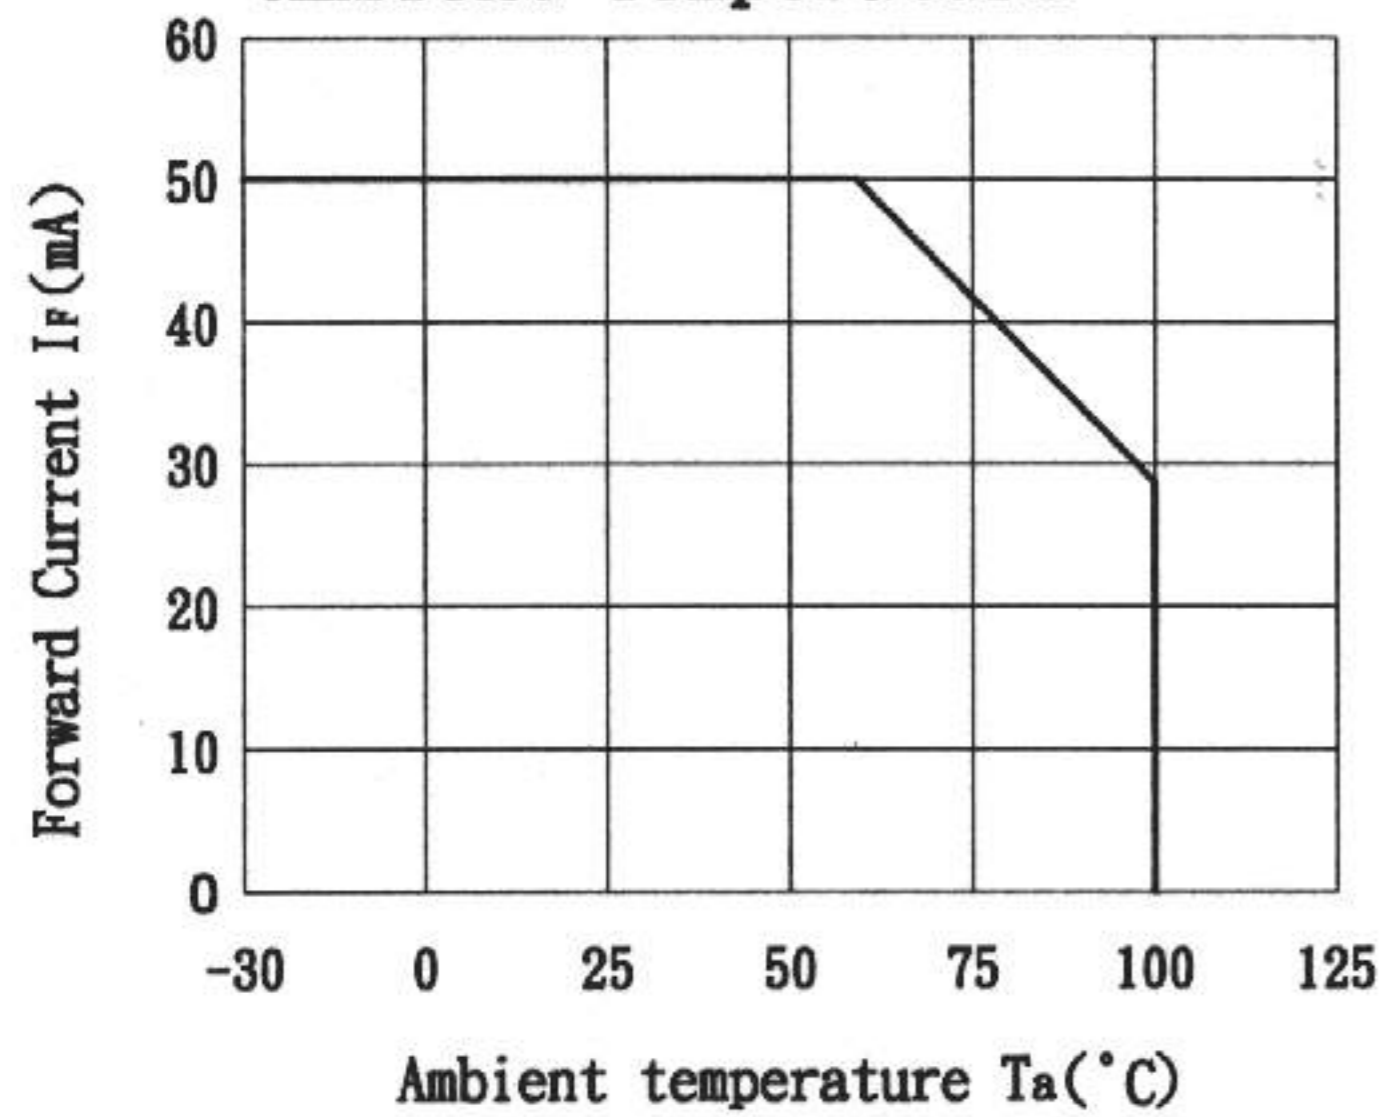


Fig. 5 Forward Current vs. Forward Voltage

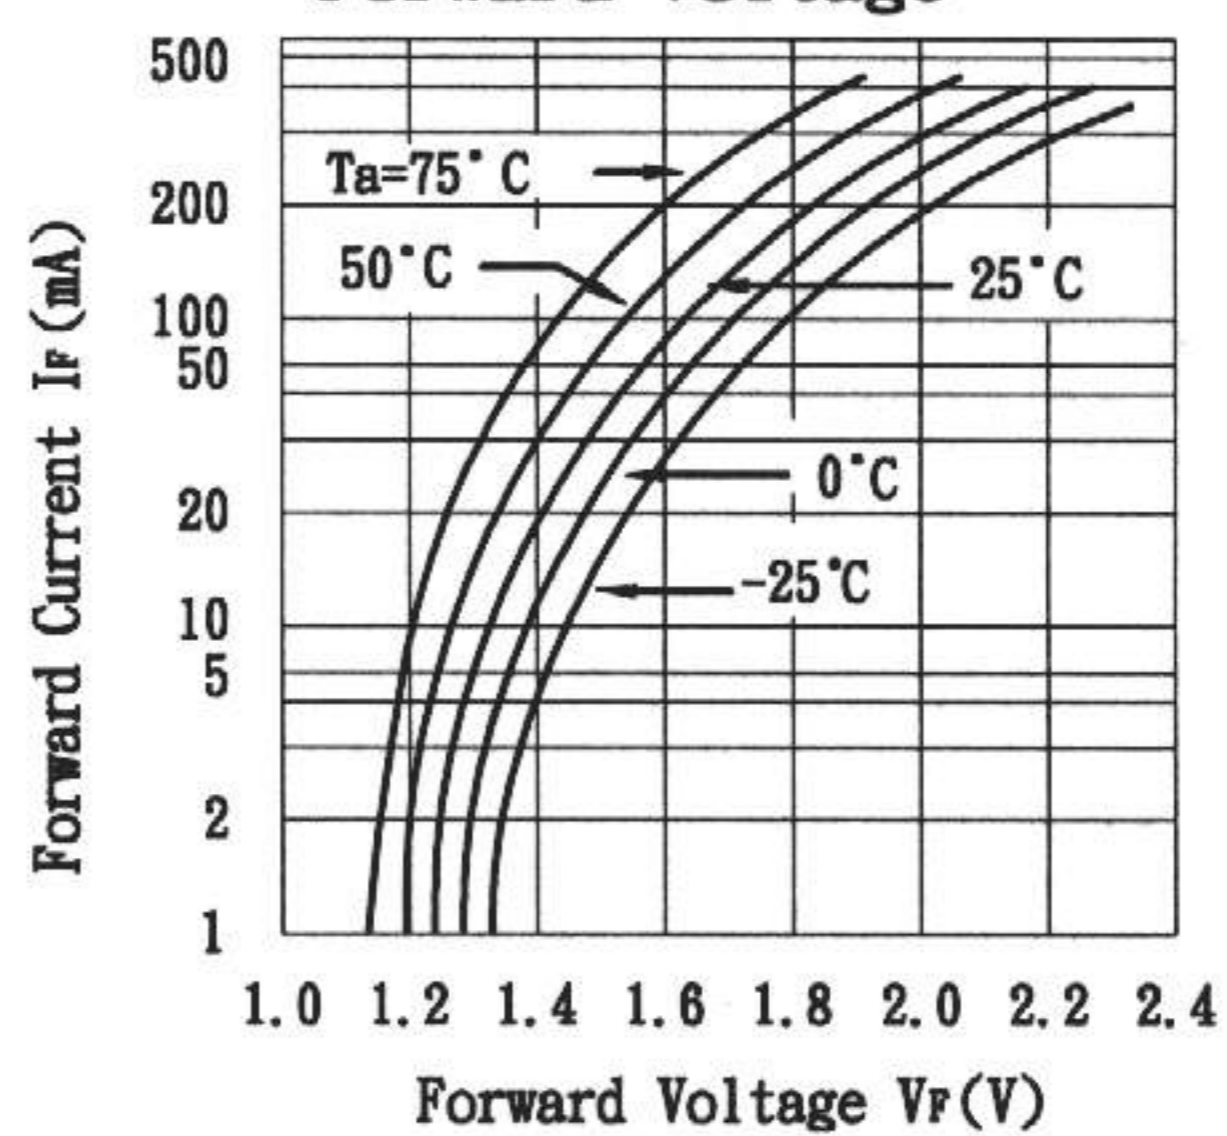


Fig. 6 Collector Current vs. Collector-emitter Voltage


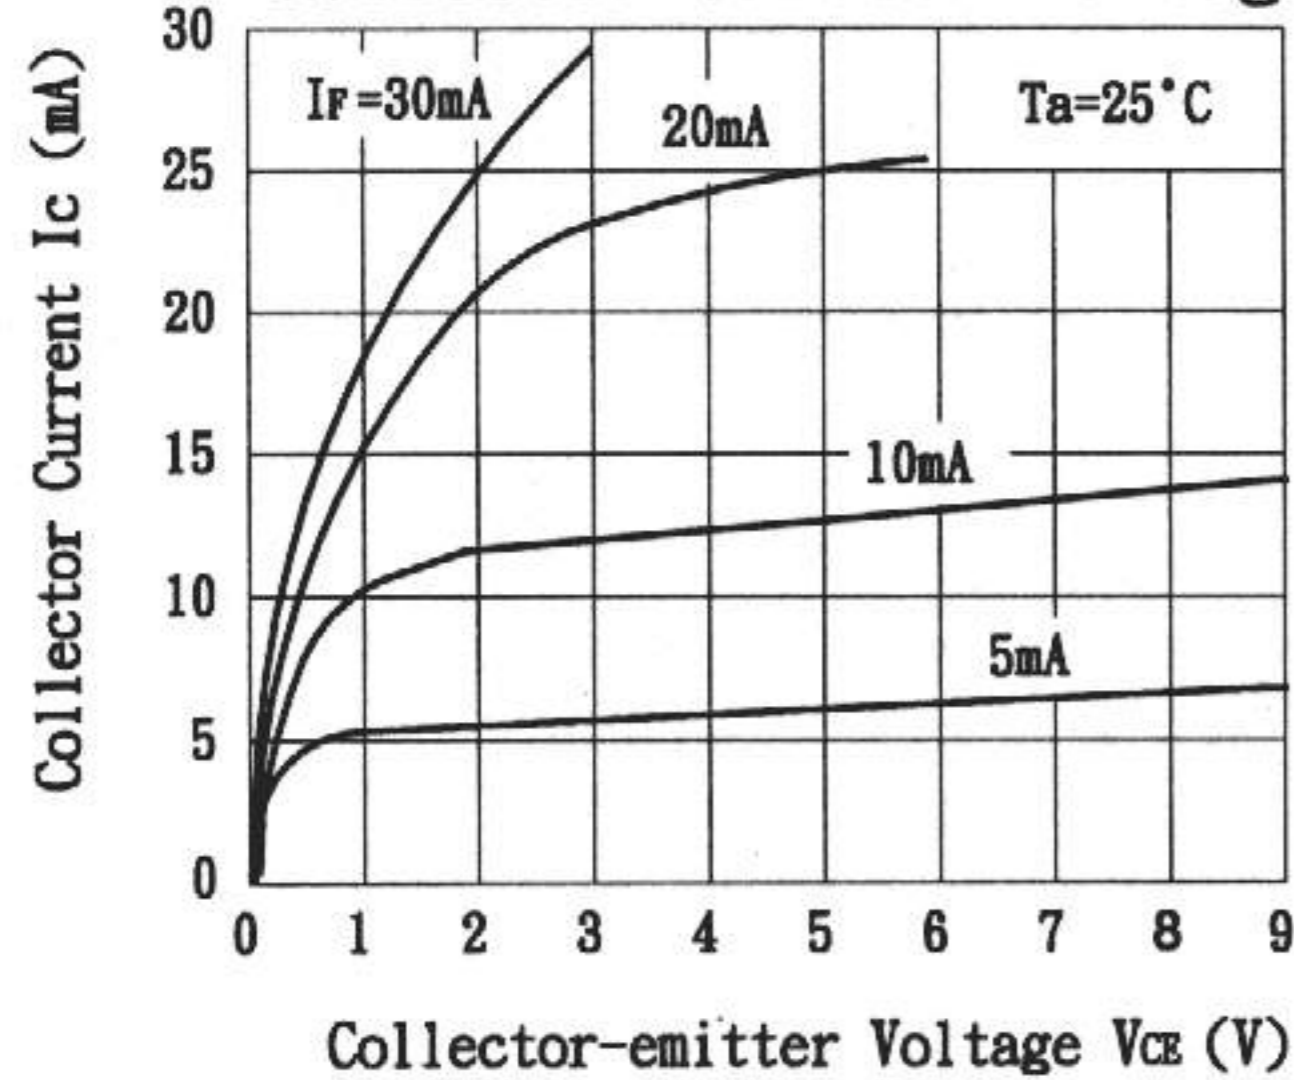


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

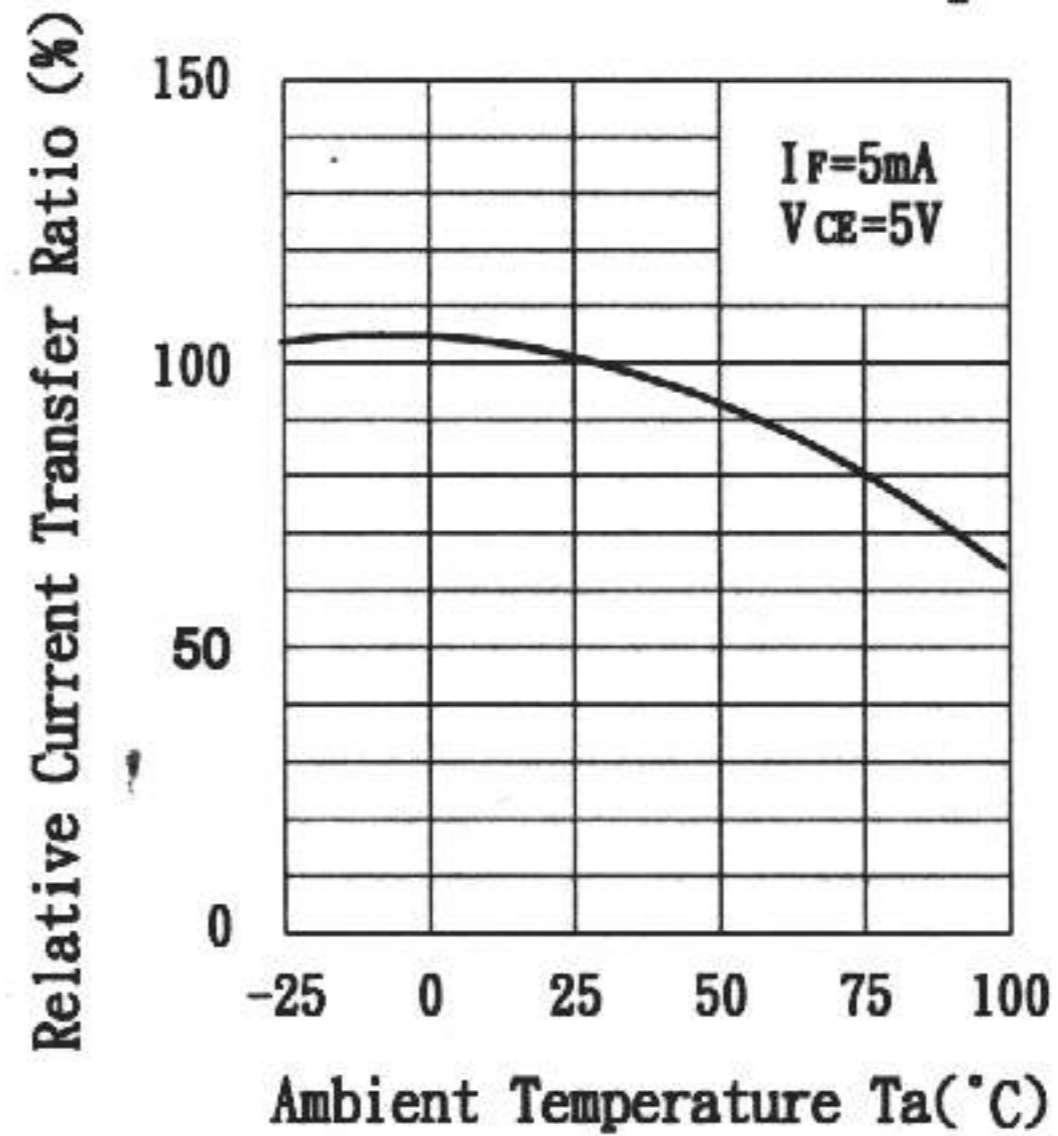

PRODUCT SPECIFICATION

DATE:02/23/2001

COSMO ELECTRONICS CO., LTD.	Photocoupler : KP1110	NO. 60P00003	VER. 4
		SHEET 5 OF 5	

Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

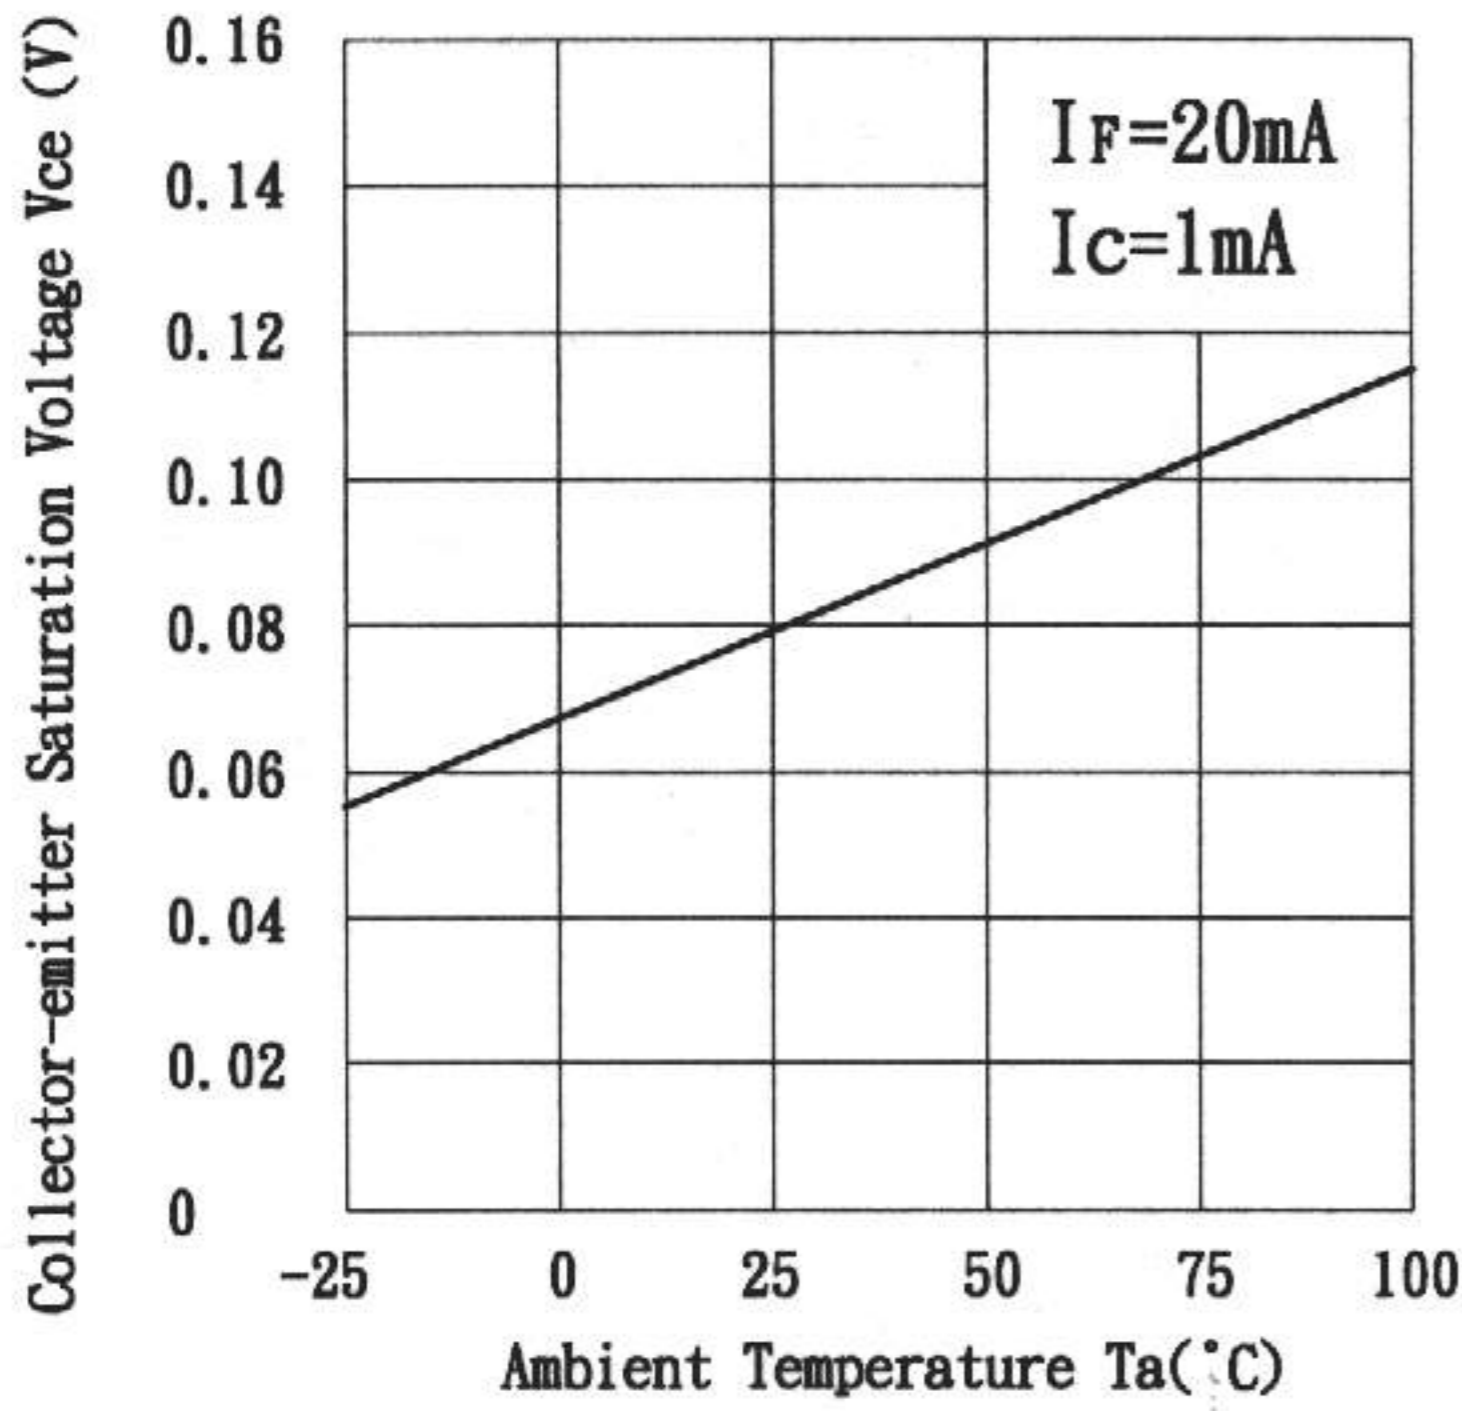


Fig. 9 Collector-emitter Saturation Voltage vs. Forward Current

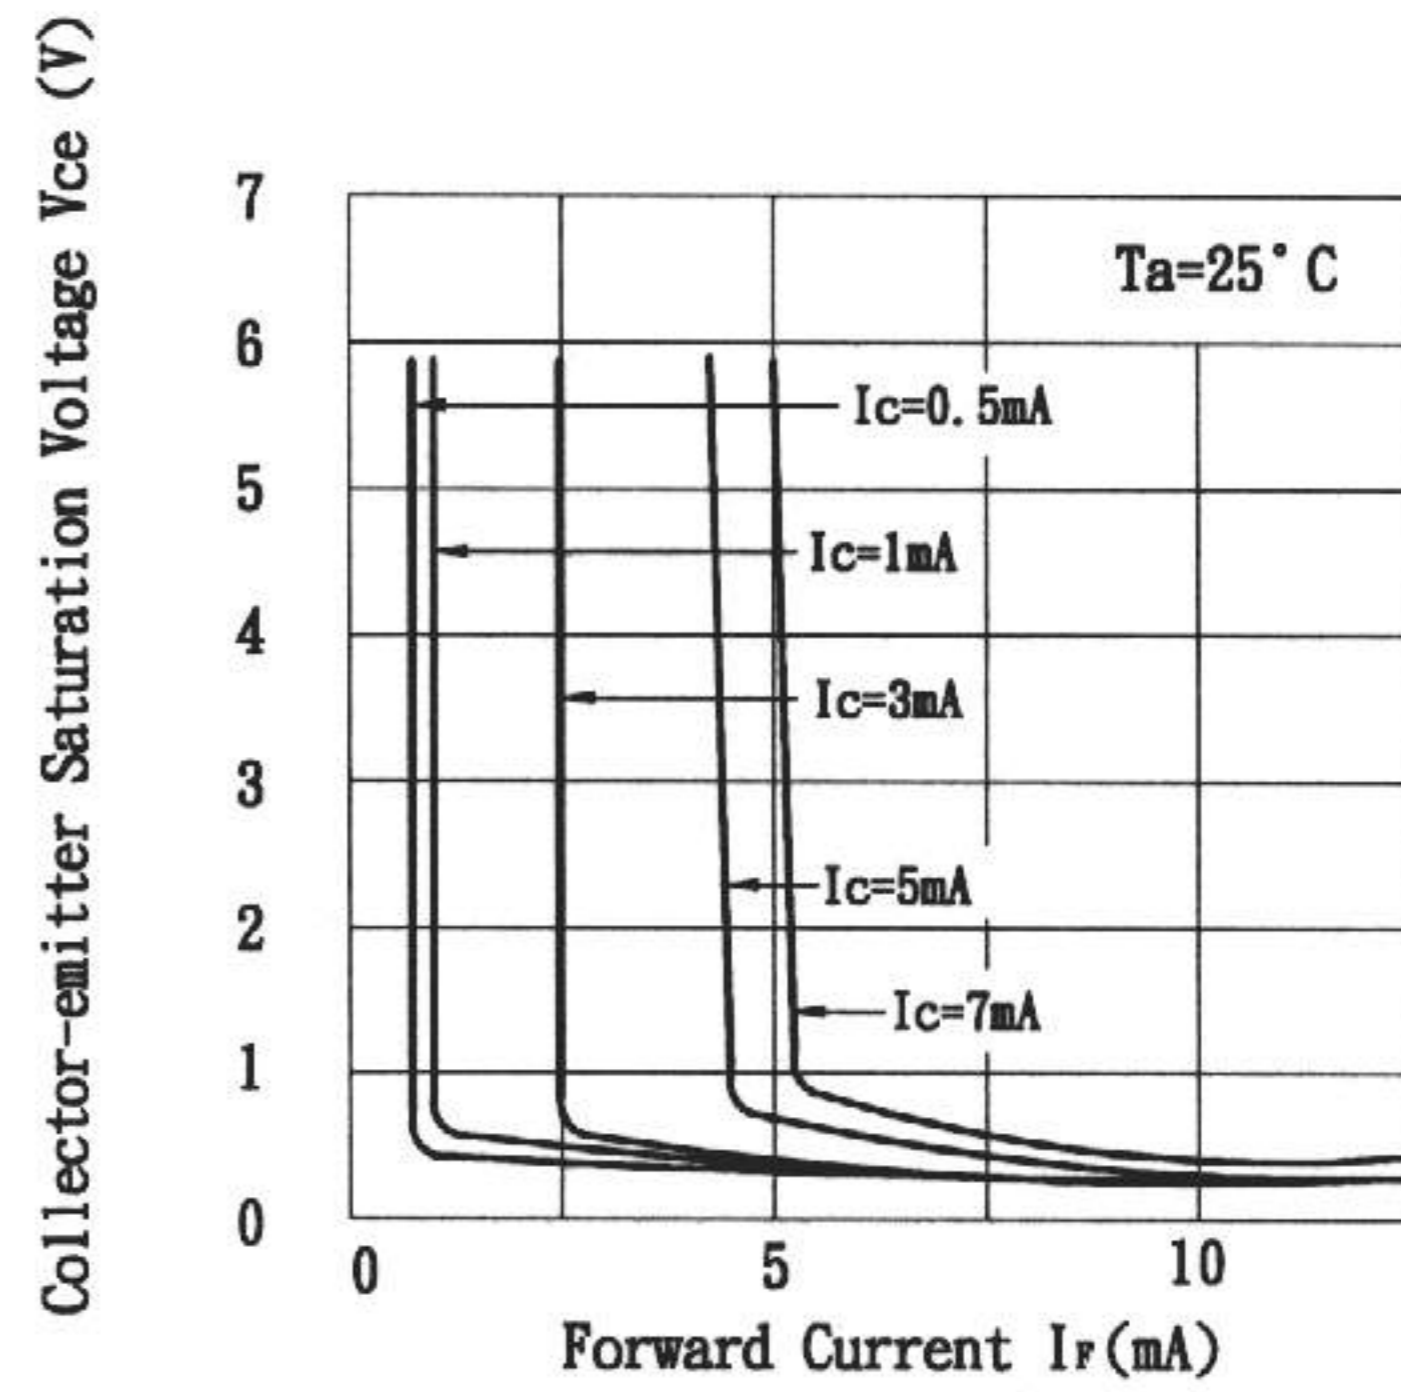


Fig. 10 Response Time vs. Load Resistance

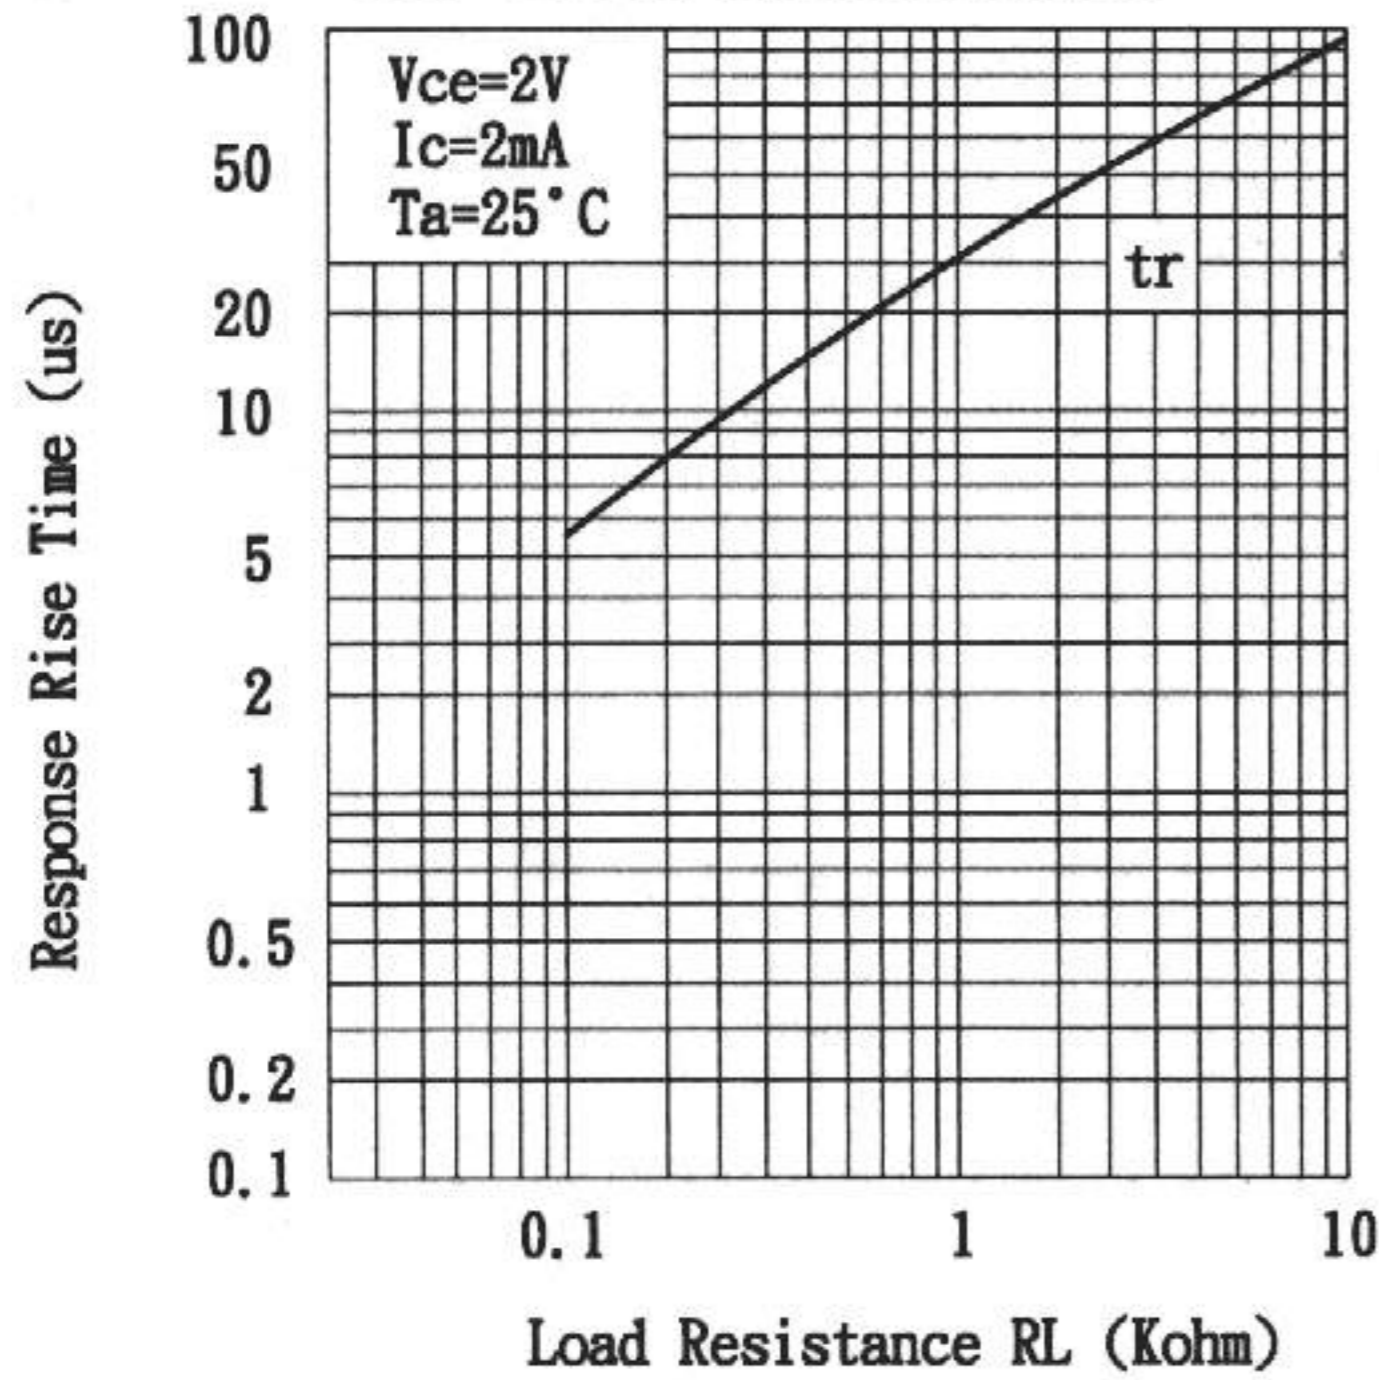


Fig. 11 Response Time vs. Load Resistance

