



## TA4 SERIES





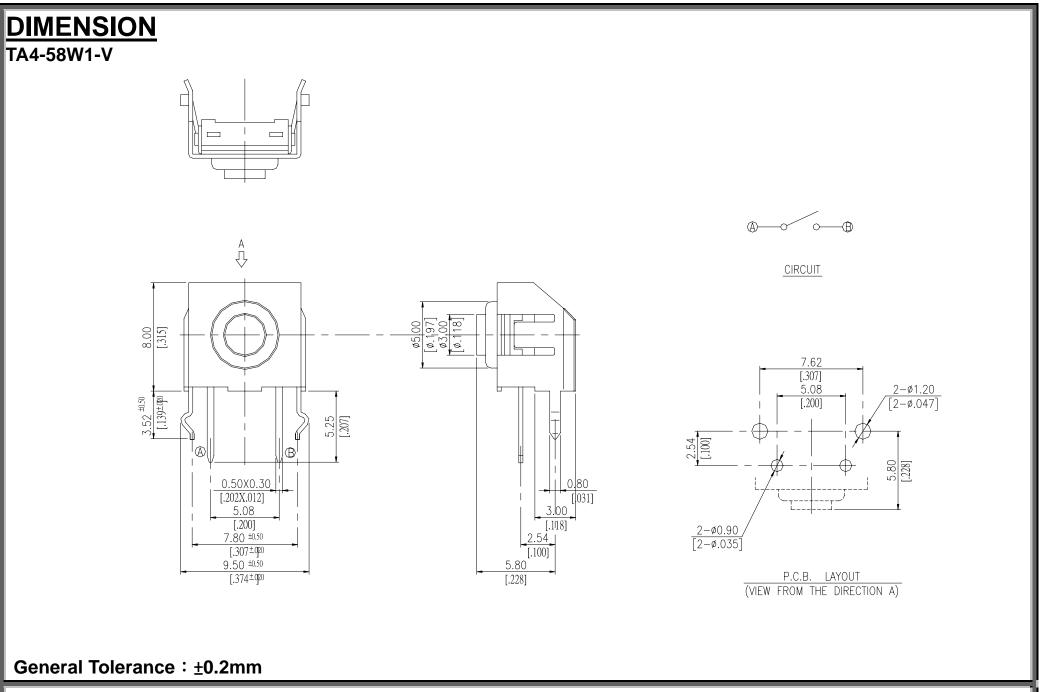

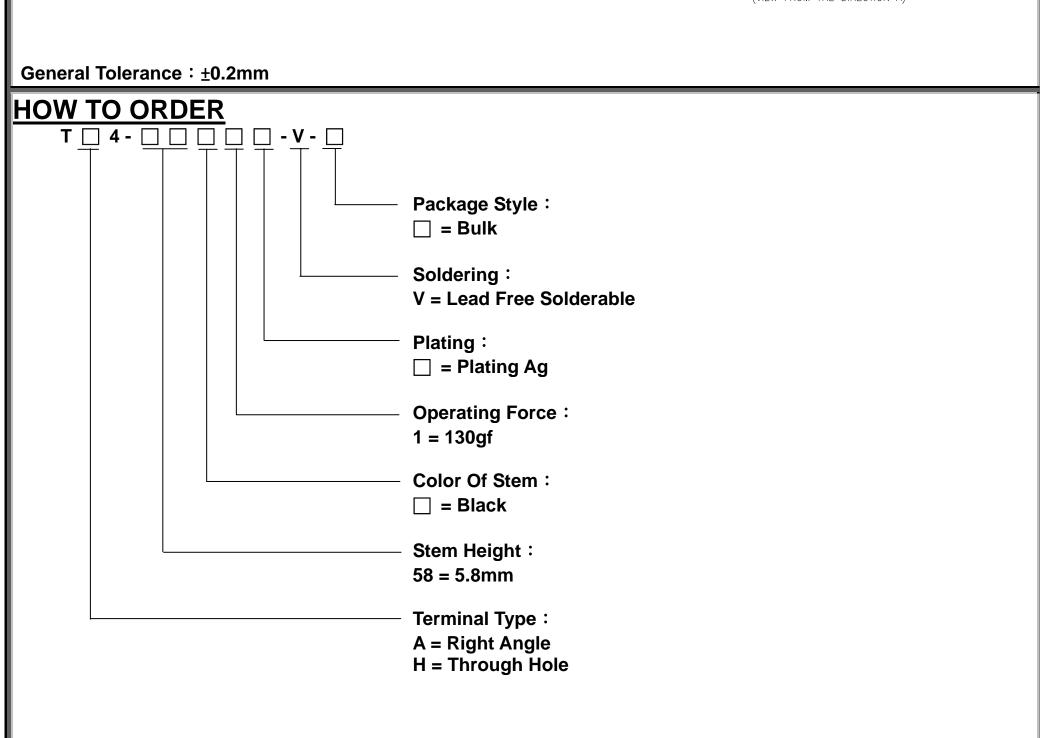

## **△ENVIRONMENTAL Color**: with silver plating Operation Temperature Range : -40°C to +90°C **△TERMINAL**: Brass with silver plating Storage Temperature Range : -40°C to +90°C **△SILICONE RUBBER**: Silicone Color: White **∧ELECTRICAL △DOME**: Stainless Steel Electrical Life: 1,000,000 cycles Switching Rating: 50 mA, 50 VDC **SOLDERING PROCESS** △HAND SOLDERING: Us a soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder. **△WAVE SOLDERING**: Recommended solder temperature At 500°F(260°C)max. 5 seconds. **Number Per Number Per PACKING Part Number** Reel Bulk TA4-58W1 **500**

**MATERIAL** 

**△COVER**: Brass

Color: Black

**△BRACKET**: Phosphor Bronze with silver plating

**△BASE**: UL 940V-0 NYLON High-temp thermoplastic

**△STEM**: UL 940V-0 NYLON High-temp thermoplastic

**SPECIFICATION** 

**Stroke** : 0.5±0.2mm

Mechanical Life: 1,000,000 cycles

**Operation Force:** 130±50gf

**∧MECHANICAL**