

DETAILS


Product Number	CN12707_LENINA-M
Family	Lenina
Type	RefPack
Color	metal
Diameter	74 mm
Height	46,3 mm
Style	round
Optic Material	PC
Holder Material	PC
Fastening	screw
Status	production ready
ROHS Compliant	Yes
Date Updated	19/02/2015

OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
CLU730	24 deg	Medium	94 %	2.800	-
CXM-22	39 deg	Medium	92 %	1.800	LEDiL: LEDiL
LUXEON CoB 1216	39 deg	Medium	92 %	1.700	-
CLL04x/CLU04x	40 deg	Medium	86 %	1.500	-
ZC25/40	42 deg	Medium	85 %	1.400	-



Relative intensity of CN12707_LENINA-M_(CXM-22)

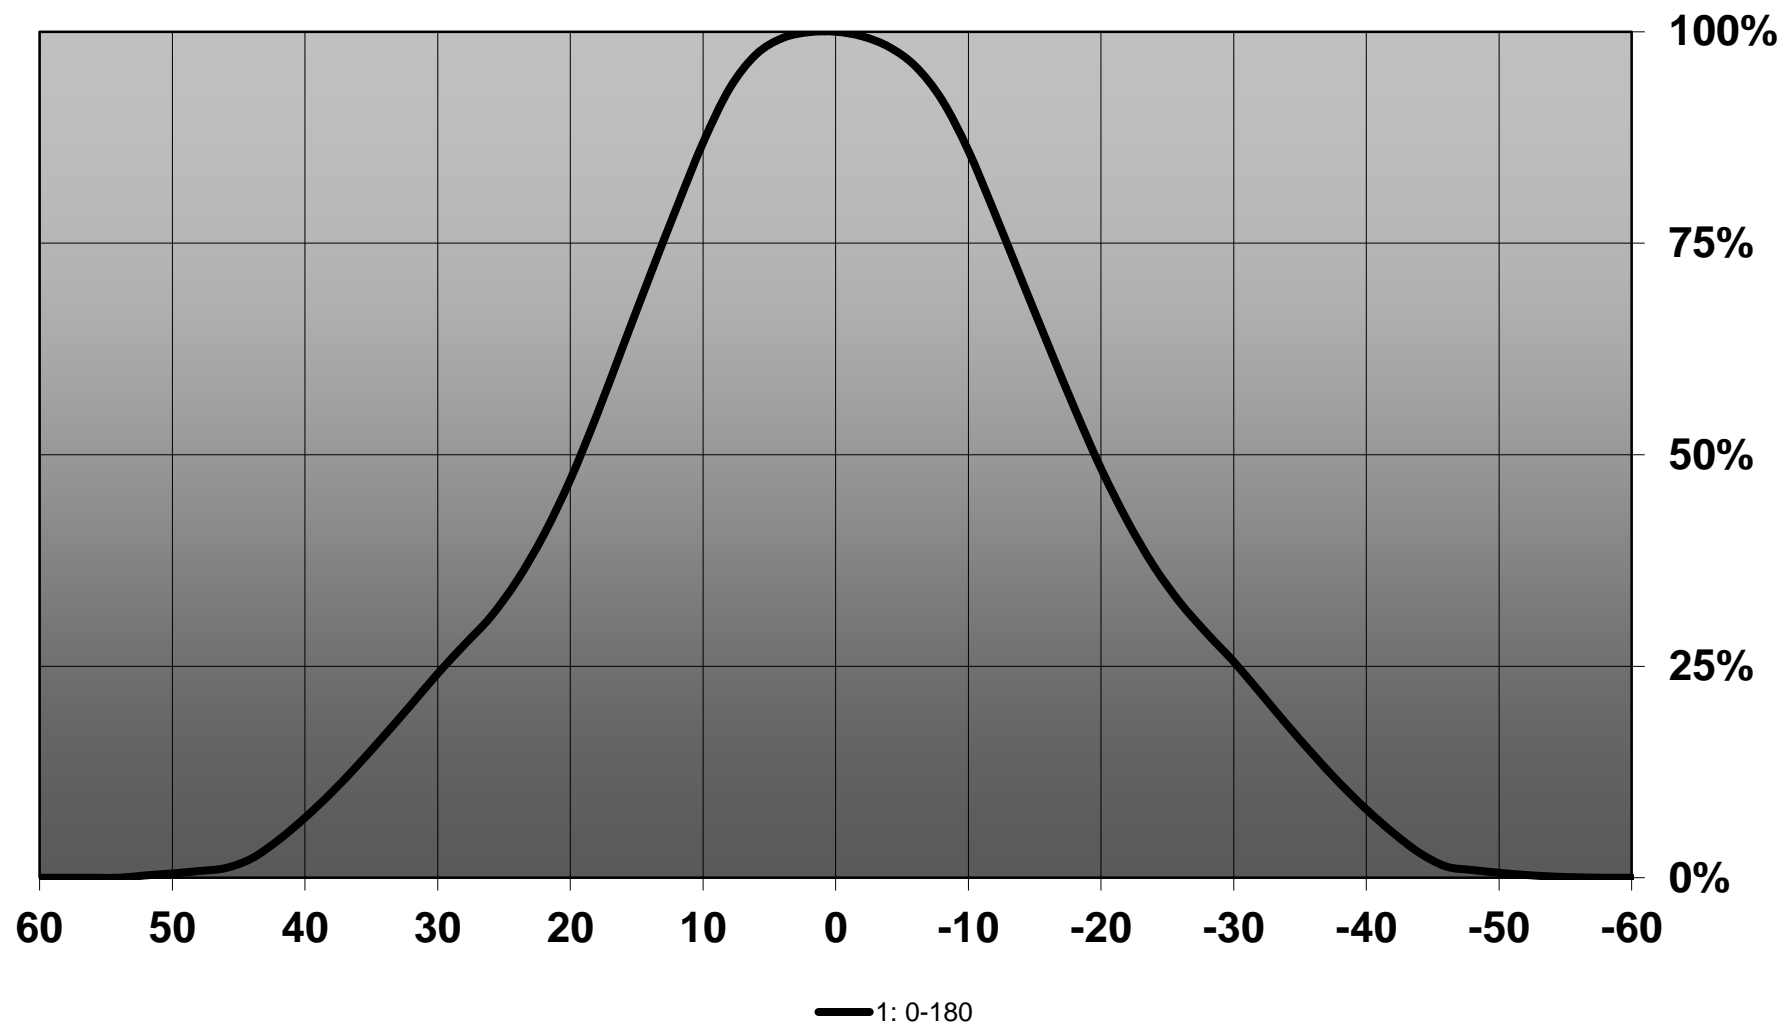

Relative intensity of CN12707_LENINA-M

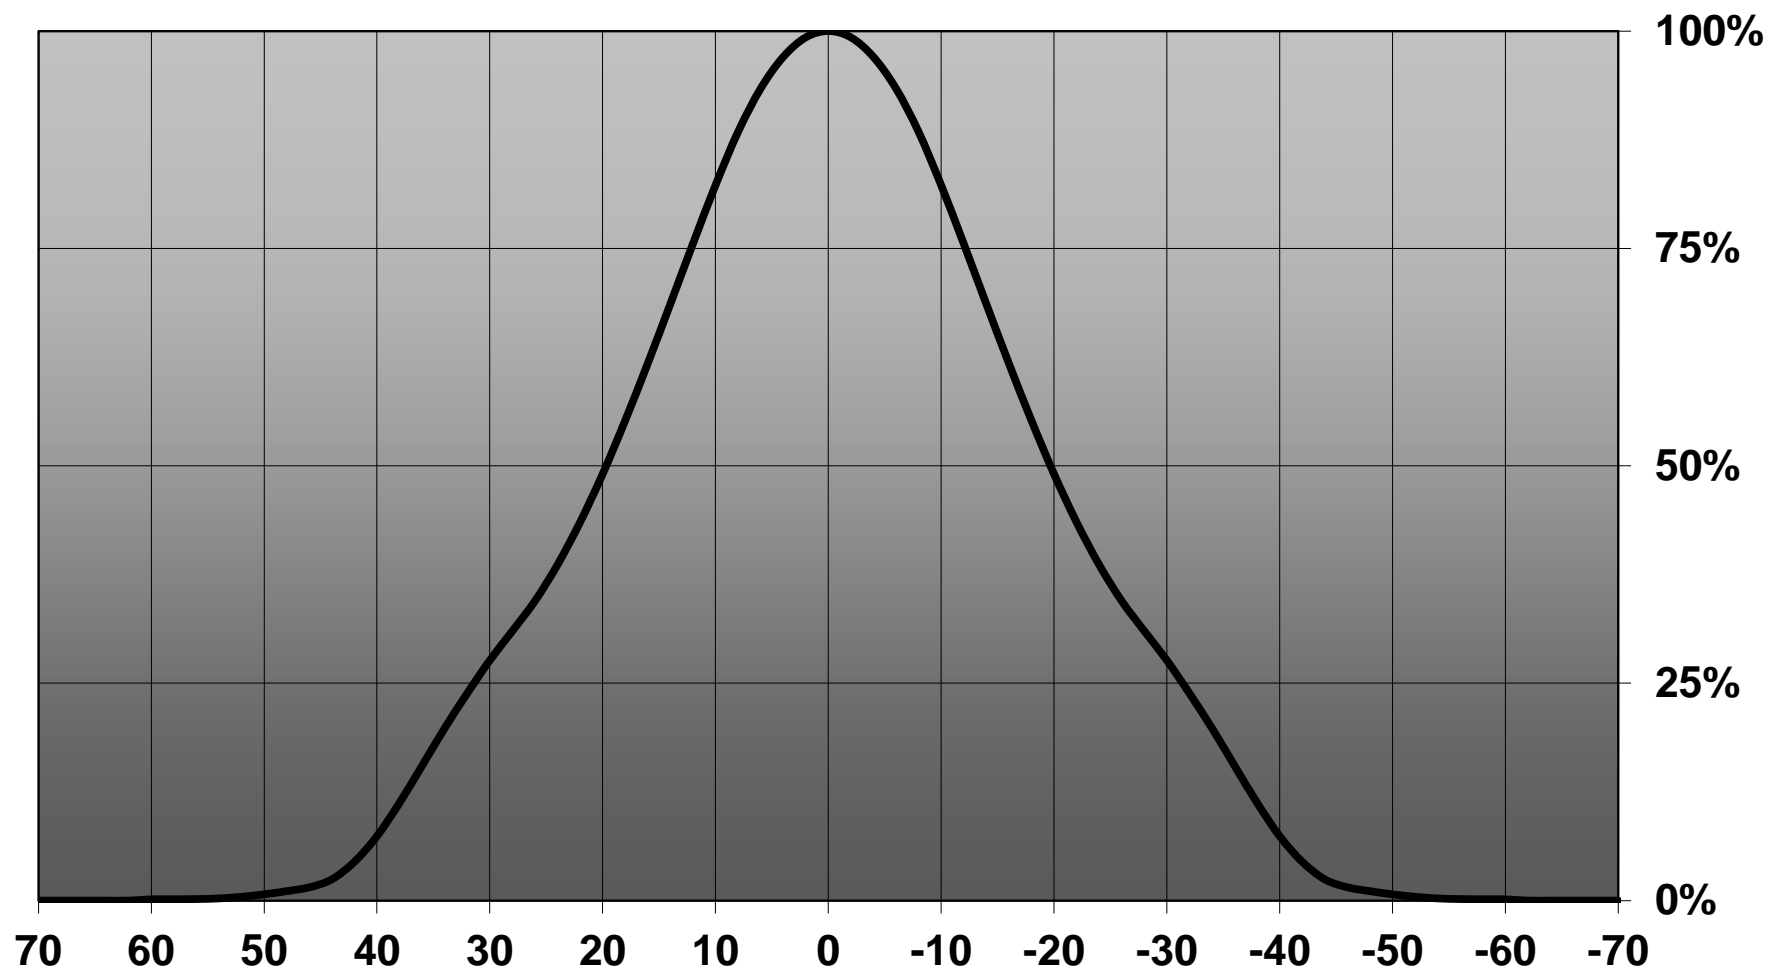

D C B A

4




4

3

3

2

2

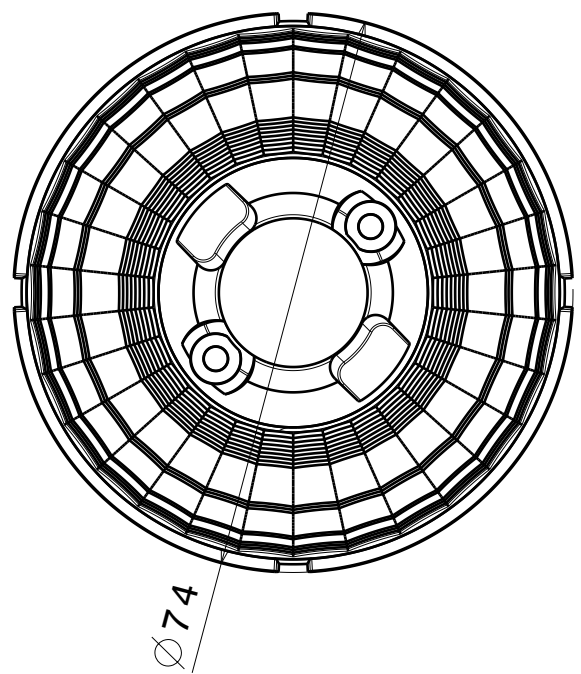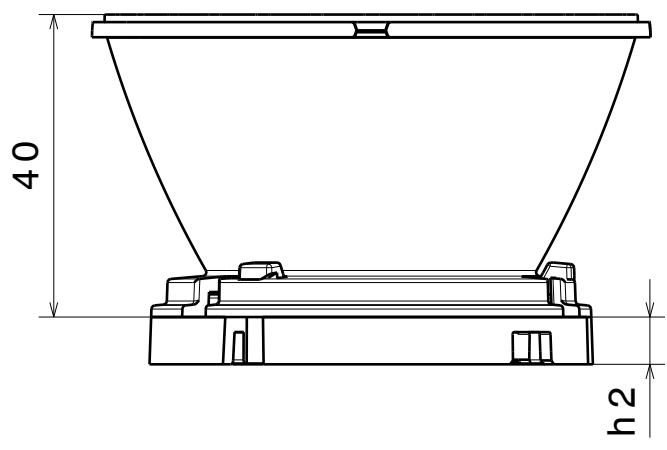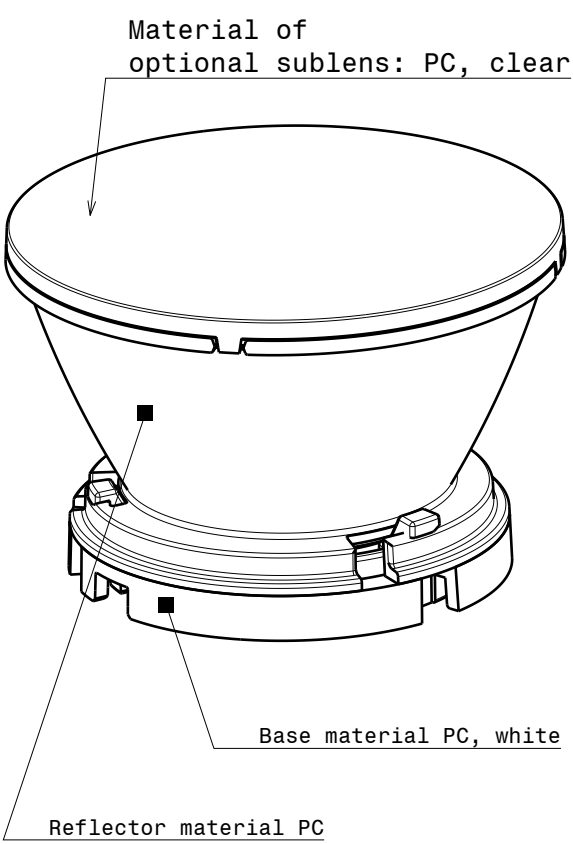

NOTE:

Using optional sublens, add 2.1mm to the system height

Dimension 'h2' varies from 4.5mm to 7mm depending on the LED specific base part

This drawing is our property. It can't be reproduced or communicated without our written agreement.



Ledil Oy
Salorankatu 10
FIN-24240 SALO
Finland

DRAWING TITLE

Datasheet Lenina series


DRAWN BY ks	DATE 23.04.2014	Datasheet Lenina series					
CHECKED BY	DATE	SIZE A4	DRAWING NUMBER --				REV 1
DESIGNED BY pl	DATE 08.03.2012	SCALE 1:1	WEIGHT (g)			SHEET 1 / 1	

1

1

D A


Luminaire: Ledil CN12707_LENINA-M_(CLU730)
Lamps: 1 x CITIZEN_CLU730_(C12692_LENA-STD-BASE-CLL040)_1247.17lm@250mA_P=8.5W_I=0.25A

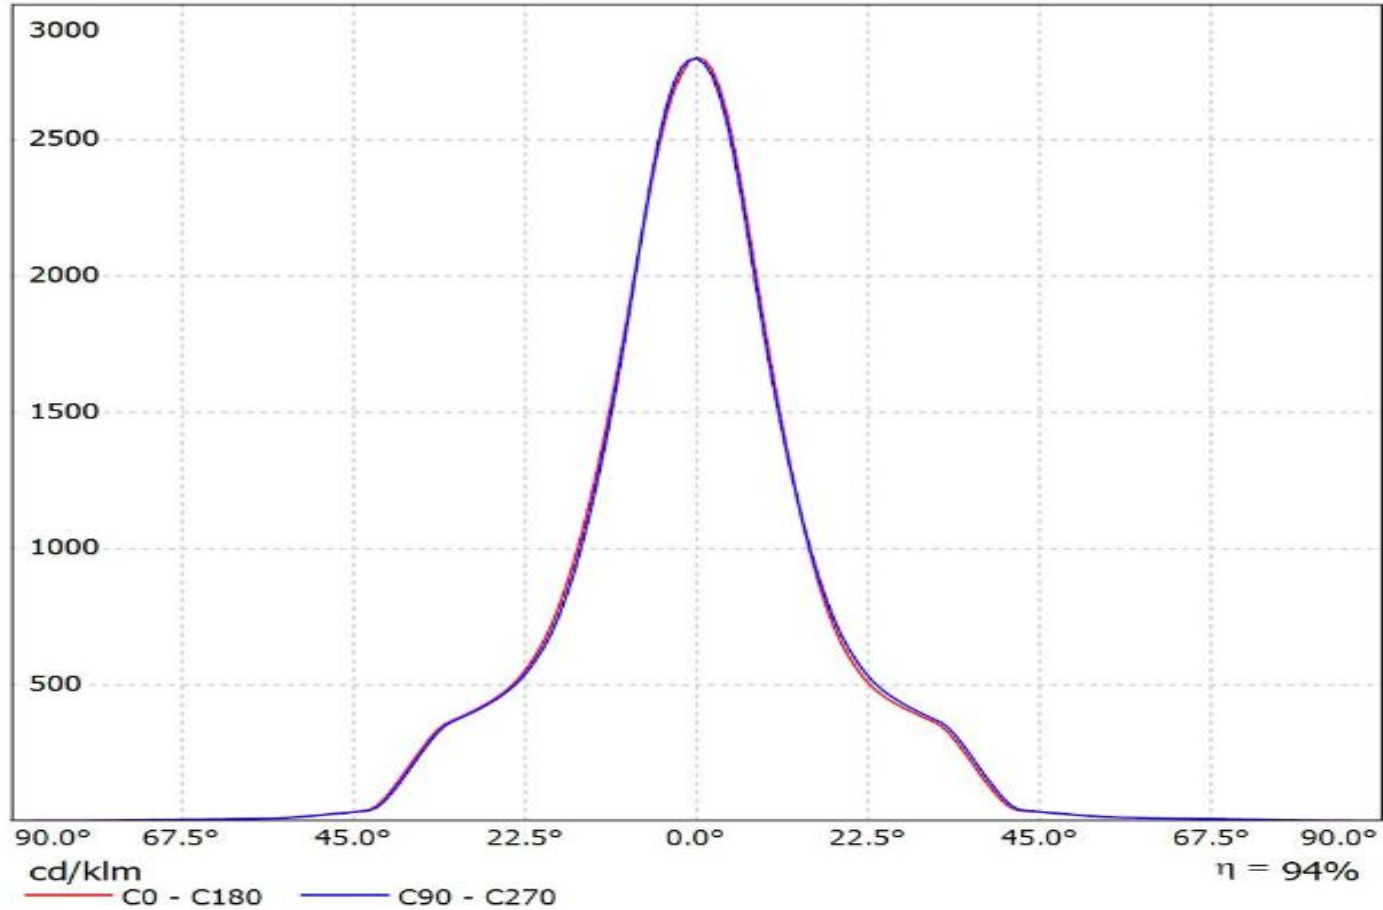


Ledil CN12707_LENINA-M_(CoB_1216) / LDC (Linear)

Luminaire: Ledil CN12707_LENINA-M_(CoB_1216)

Lamps: 1 x Luxeon_CoB_1216_(L2C2-40801216E2300)_1399.08lm@250mA_P=8.00375W_I=0.25A

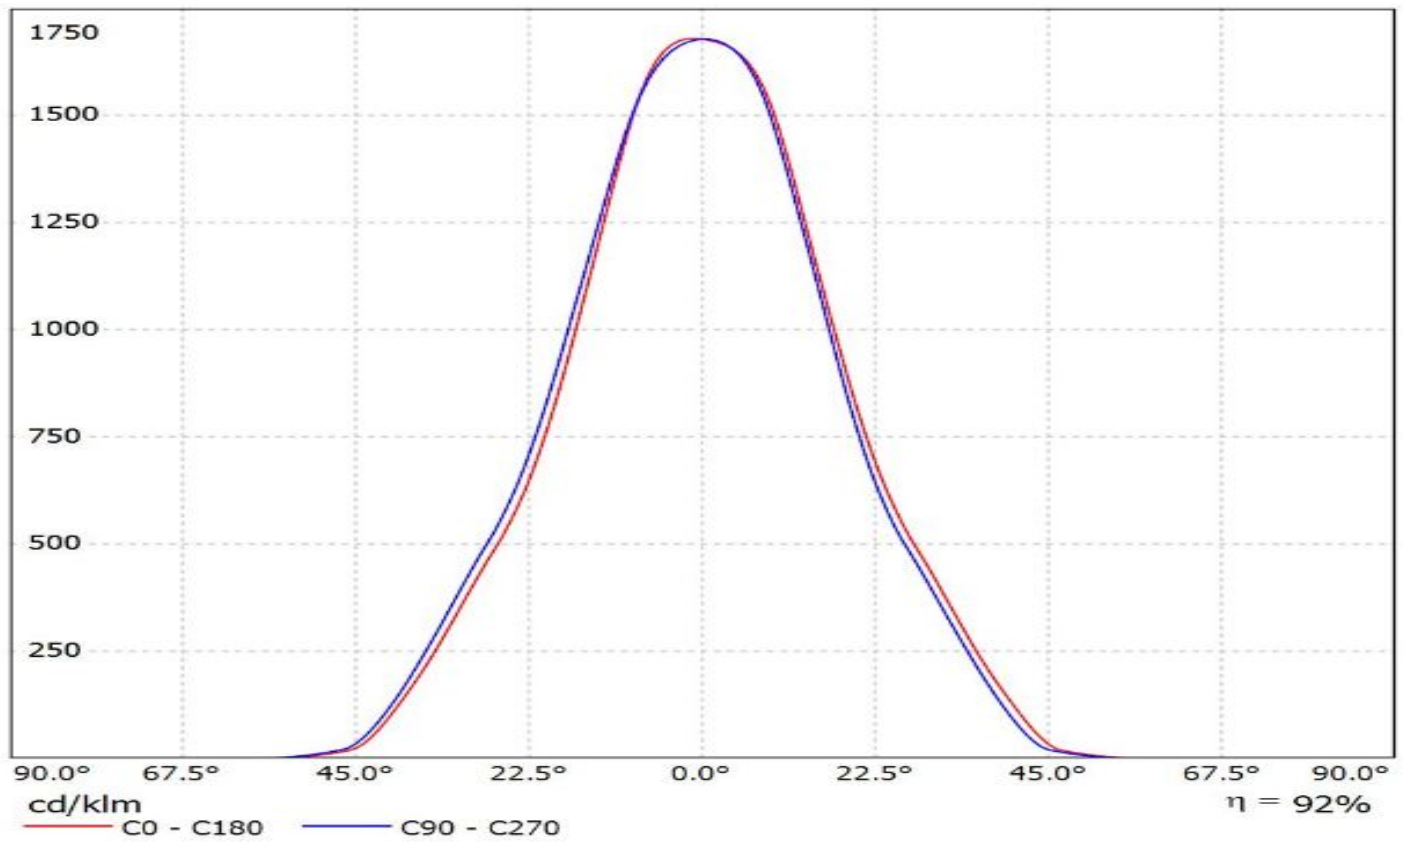


Luminaire: Ledil Oy CN12707_LENINA-M (Citizen CLL040 1044lm @ 250mA) Efficiency=86%
Lamps: 1 x Citizen CLL040 1044lm @ 250mA

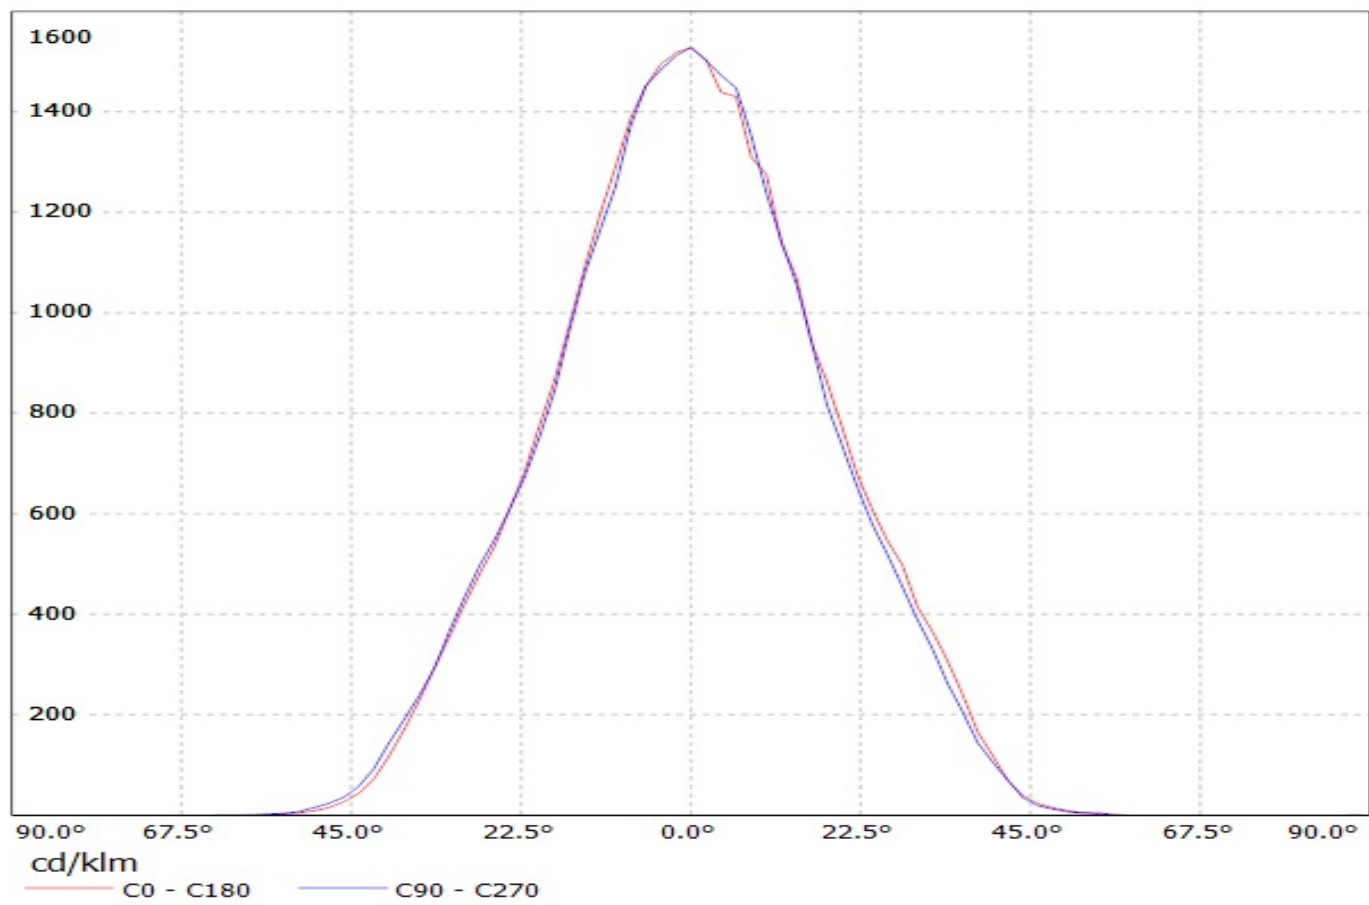

LEDiL Oy CN12707_LENINA-M_(ZC-40) Eff. 85,3% / LDC (Linear)


Luminaire: LEDiL Oy CN12707_LENINA-M_(ZC-40) Eff. 85,3%

Lamps: 1 x SEOUL_ZC-40 (1233.37lm@250mA)

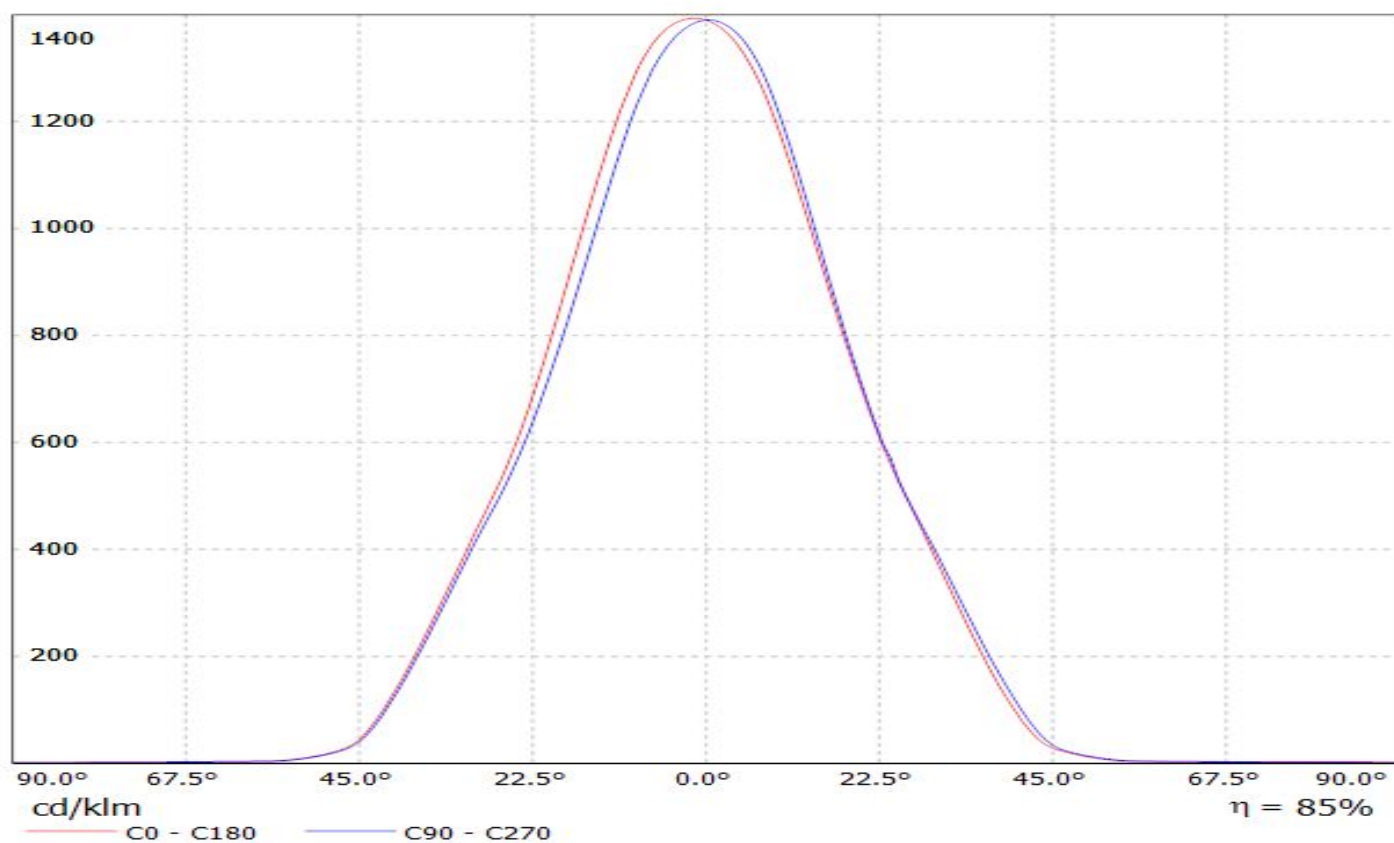

Luminaire: Ledil CN12707_LENINA-M_(CLU730)

Lamps: 1 x CITIZEN_CLU730_(C12692_LENA-STD-BASE-CLL040)_1247.17lm@250mA_P=8.5W_I=0.25A

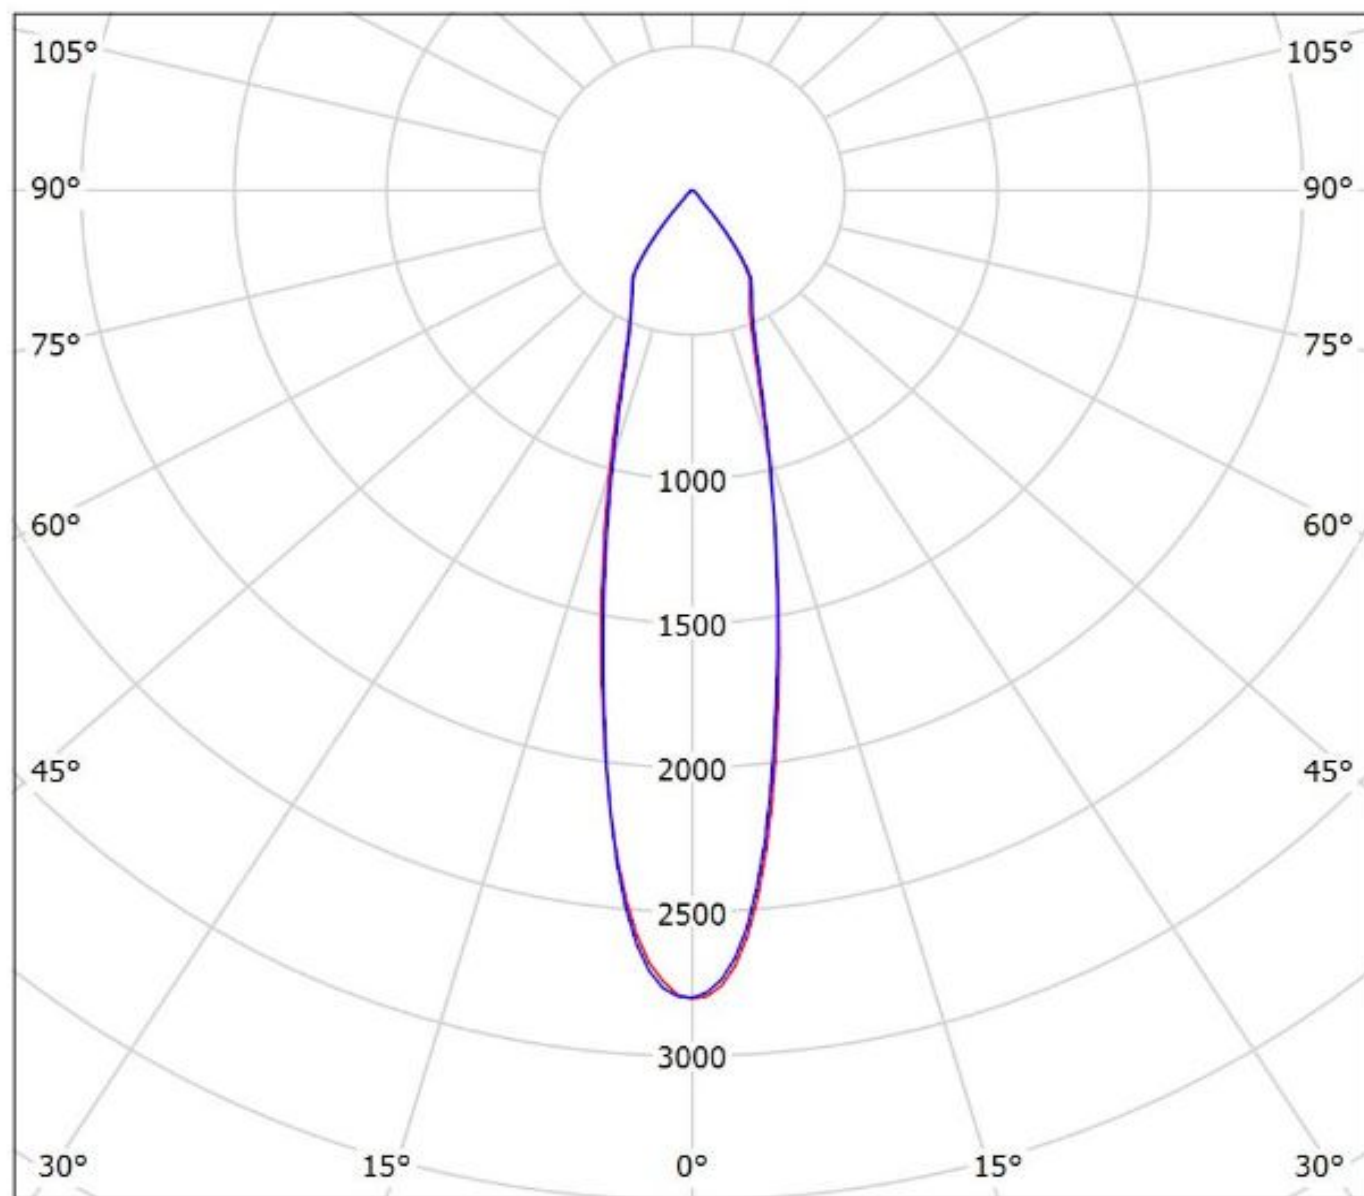

cd/klm

— C0 - C180


— C90 - C270

$\eta = 94\%$


Ledil CN12707_LENINA-M_(CoB_1216) / LDC (Polar)

Luminaire: Ledil CN12707_LENINA-M_(CoB_1216)

Lamps: 1 x Luxeon_CoB_1216_(L2C2-40801216E2300)_1399.08lm@250mA_P=8.00375W_I=0.25A

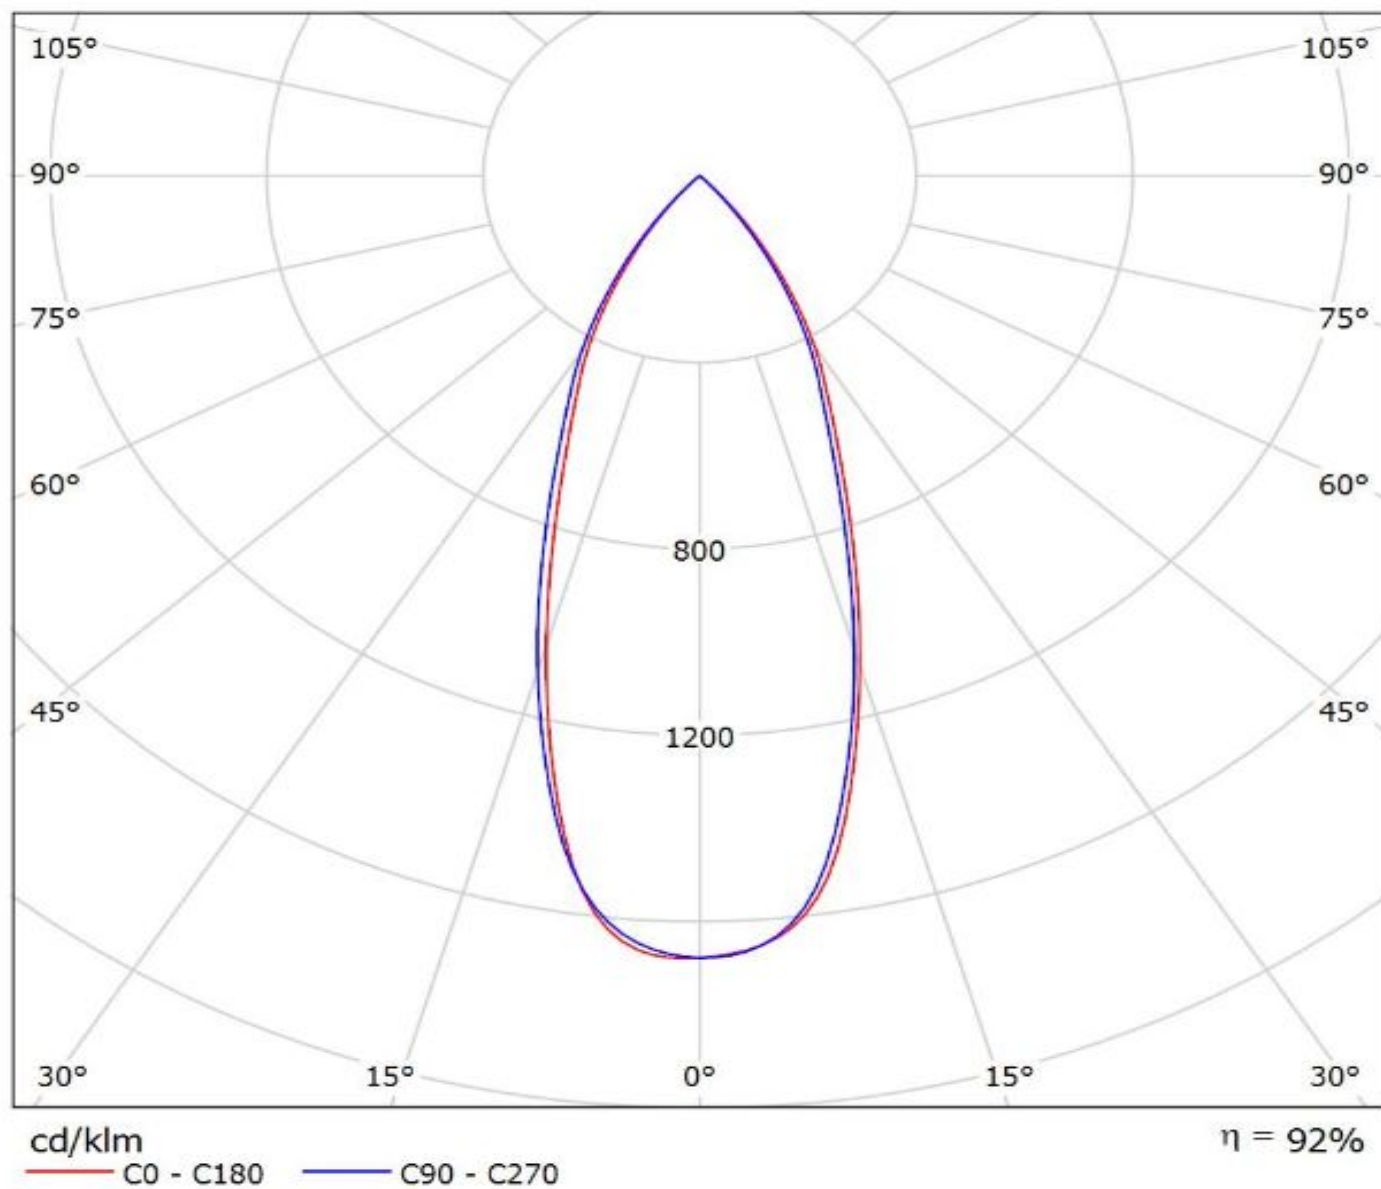

Luminaire: Ledil Oy CN12707_LENINA-M (Citizen CLL040 1044lm @ 250mA) Efficiency=86%
Lamps: 1 x Citizen CLL040 1044lm @ 250mA

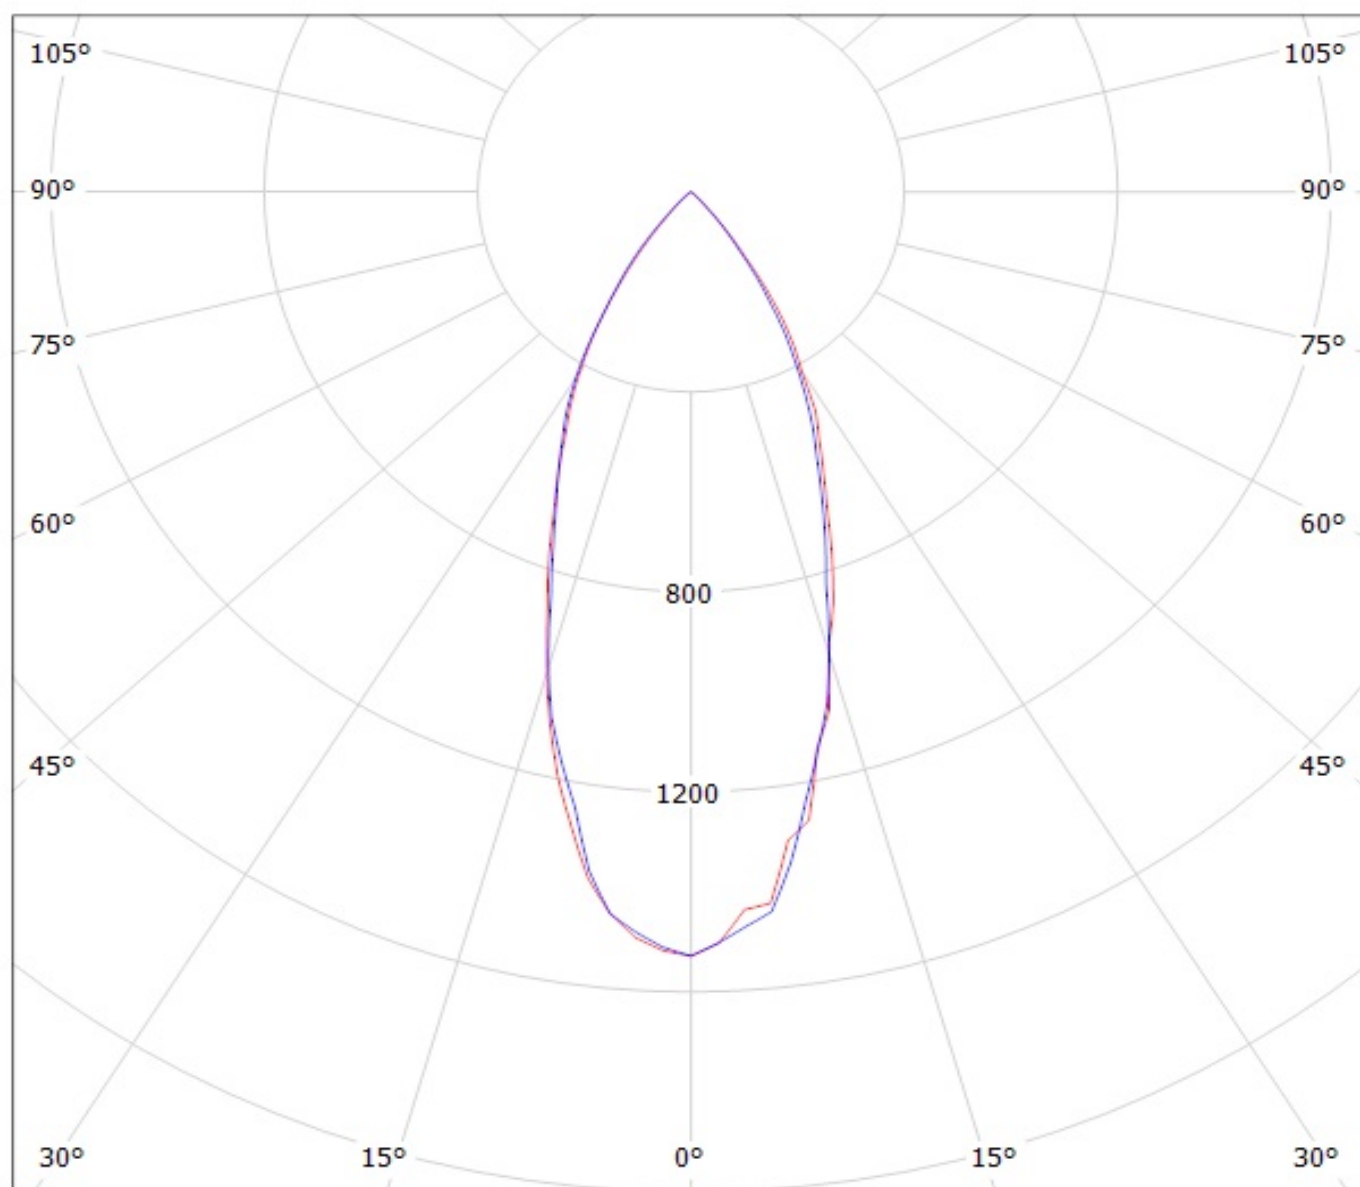

cd/klm


— C0 - C180

— C90 - C270

LEDiL Oy CN12707_LENINA-M_(ZC-40) Eff. 85,3% / LDC (Polar)

Luminaire: LEDiL Oy CN12707_LENINA-M_(ZC-40) Eff. 85,3%

Lamps: 1 x SEOUL_ZC-40 (1233.37lm@250mA)

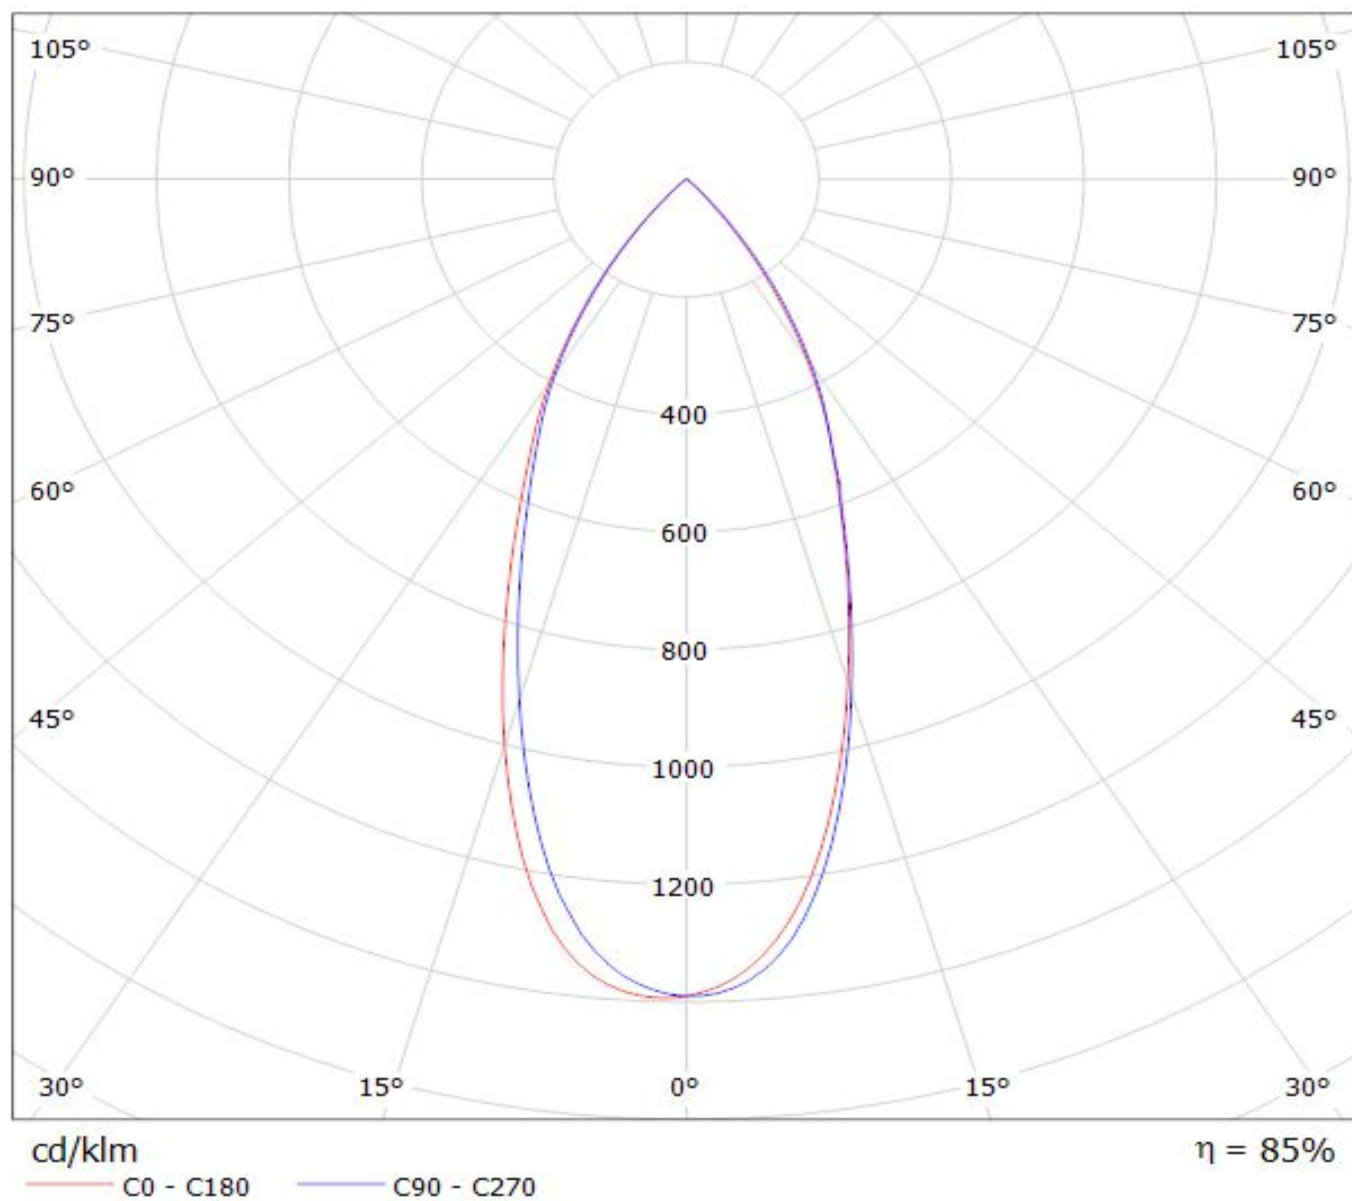

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.