
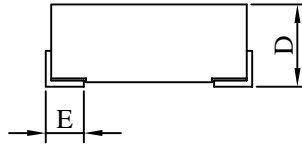


# SPECIFICATION FOR APPROVAL


REF : 20120718-D

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	HP1004□□□□2□-□□□	
		REV.		PAGE 1

## I . MECHANICAL DIMENSIONS :


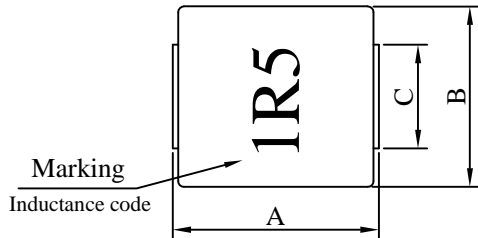


- A : 11.3 ± 0.4 m/m
- B : 10.5 ± 0.3 m/m
- C : 3.50 ± 0.3 m/m
- D : 4.00 max. m/m
- E : 1.70 ± 0.5 m/m
- F : 4.50 typ. m/m
- G : 6.00 typ. m/m
- H : 13.0 typ. m/m

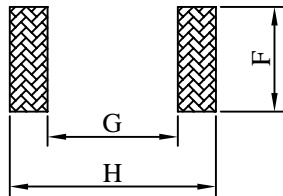

( PCB Pattern )

## II . SCHEMATIC DIAGRAM :

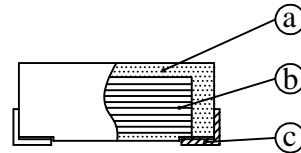


## III . MATERIALS LIST :

- a . Core : Iron powder
- b . Wire : Enamelled copper wire
- c . Cilp : Cu / Ni / Sn
- d . Remark : Products comply with RoHS' requirements

Peak Temp : 245°C max.  
 Max. Peak Temp - 5°C : 30sec max.  
 Max time above 217°C : 60sec~150sec max.

## IV . GENERAL SPECIFICATION :

- a . Storage temp. : -55°C ~ +125°C
- b . Operating temp. : -55°C ~ +125°C  
( Temp. rise included )
- c . Resistance to solder heat : 245°C. 10 secs.

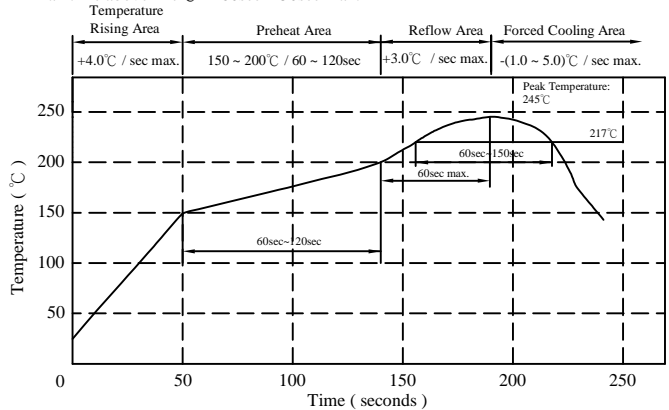

AR-001A

# SPECIFICATION FOR APPROVAL

REF : 20120718-D

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	HP1004□□□□2□-□□□		
		REV.		PAGE	2

**V . ELECTRICAL CHARACTERISTICS :**

DWG No.	Inductance L ( $\mu$ H )	Isat ( A ) typ.	Irms(A) typ.	RDC ( m $\Omega$ )	
				max.	typ.
HP10041R5M2□-□□□	1.50 $\pm$ 20 %	27.5	15.0	6.0	5.5
HP10042R2M2□-□□□	2.20 $\pm$ 20 %	25.5	12.0	9.0	8.5
HP10043R3M2□-□□□	3.30 $\pm$ 20 %	18.5	10.0	12.0	11.0
HP10044R7M2□-□□□	4.70 $\pm$ 20 %	17.0	9.5	16.5	15.0
HP10045R6M2□-□□□	5.60 $\pm$ 20 %	16.0	8.5	19.5	18.0
HP10046R8M2□-□□□	6.80 $\pm$ 20 %	13.5	8.0	23.5	21.5
HP1004100M2□-□□□	10.0 $\pm$ 20 %	12.0	6.5	36.5	33.5

- 1). □ : Packaging information ... [A]: Bulk [B]: Taping Reel
- 2). "-□□□":Reference code
- 3). Measured frequency of inductance is 100 KHz / 0.25V
- 4). Isat base on inductance drop 20% typ. of L value at 20°C
- 5). Irms base on temp. rise 40°C typ.

AR-001A


# SPECIFICATION FOR APPROVAL

REF : 20120718-D


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	HP1004□□□□2□-□□□	
		REV.	PAGE	3

## VI . PACKAGING INFORMATION :

( 1 ) Configuration

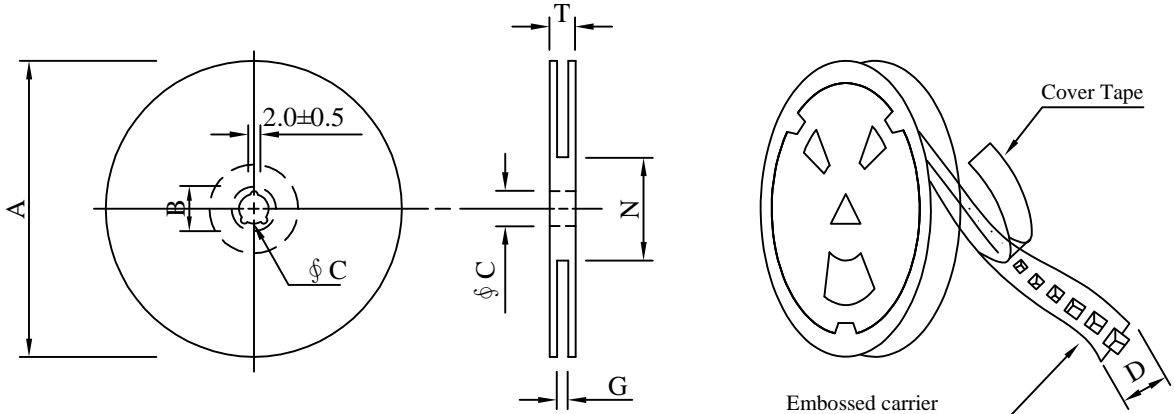

※Carrier tape width : D

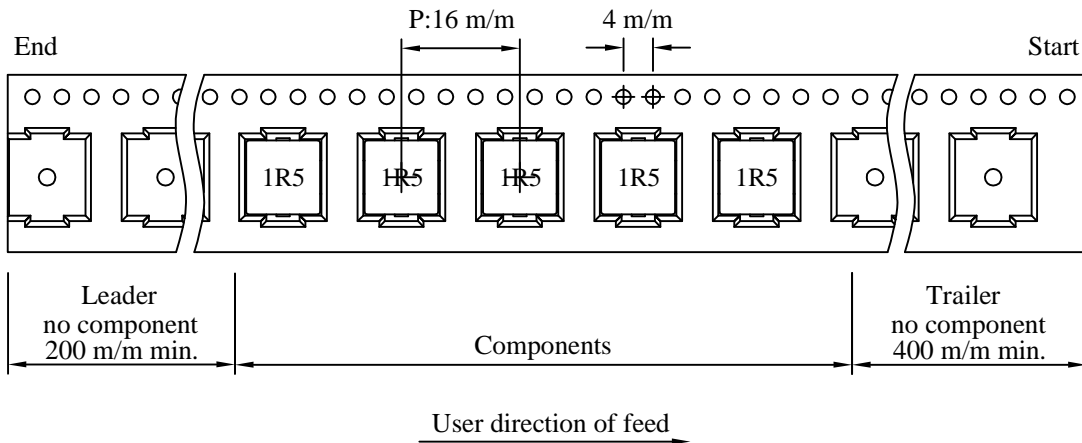

( 2 ) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 <sup>+0</sup>	50 <sup>-0</sup>	30.4

( 3 ) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
HP1004	900	2,500	13 - 24	3,600	11.0	38 x 37 x 22

AR-001A



# SPECIFICATION FOR APPROVAL

REF : 20120718-D

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	HP1004□□□□2□-□□□		
		REV.		PAGE	5

VIII . RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 95% of the terminal electrode Shall be covered With fresh solder.	Preconditioning: 150°C/16Hrs±30min Dry Bake Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. :245±5°C Flux : Rosin Dip time: 5±0.5sec						
Thermal shock test ( Temp. cycle )	Electrical oharacteristics shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-55 °C 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">+125 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-55 °C 30 minutes	Room temp. 15 minutes	→	+125 °C 30 minutes
Room temp. 15 minutes		→	-55 °C 30 minutes					
Room temp. 15 minutes		→	+125 °C 30 minutes					
Humidity Test		<p>Temperature : 40±2°C Humidity : 90±5% Time : 1000 hours</p>						
High temp. Resistance test	<p>Temperature : 125±5°C Applied current : Per spec. Time : 96 hours</p>							

AR-001A

# SPECIFICATION FOR APPROVAL

REF : 20120718-D

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	HP1004□□□□2□-□□□		
		REV.		PAGE	6

**IX . UL CARD :**

OBMW2 September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN  
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide		---	MW81-C	220
CFUEWB	---	Polyurethane		---	MW75C	130
EIAIW	---	Polyesterimide		Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide		Polyamide	---	180
EILOCKW	---	Polyesterimide		Modified Epoxy	---	200
EIW	---	Polyesterimide		---	---	220
EIW-2	---	Polyesterimide		---	MW74-C	200
FL.EILOCKY	---	Modified Polyester		Polyamide	---	155
LSFFW	---	Polyurethane		---	MW79-C	155
LSUEW	---	Polyurethane		---	---	130
PEW	---	Polyester		---	---	155
PEY	---	Polyester		Nylon	MW24-C	155
SF.FLW	---	Modified Polyester		---	MW26C	155
SF.EIW	---	Polyesterimide		---	MW77C	180
SF.BY@	---	Modified Polyester		Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester		Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester		Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide		Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide		Modified Polyamide	---	180
SF.BW@	---	Modified Polyester		---	MW26C	155
SFFW	---	Polyurethane		---	MW79	155

A not-for-profit organization dedicated to public safety and committed to quality service

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane		Polyamide	MW80C	155
UEW-1	---	Polyurethane		---	MW2-C	105
UEW-2	---	Polyurethane		---	---	130
UEW-4	---	Polyurethane		---	MW75C	130
UEY	---	Polyurethane		Nylon	MW28-C	130
UEY-2	---	Polyurethane		Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.  
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks or , material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions  
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2 OBMW2E174837  
September 8, 2000

